


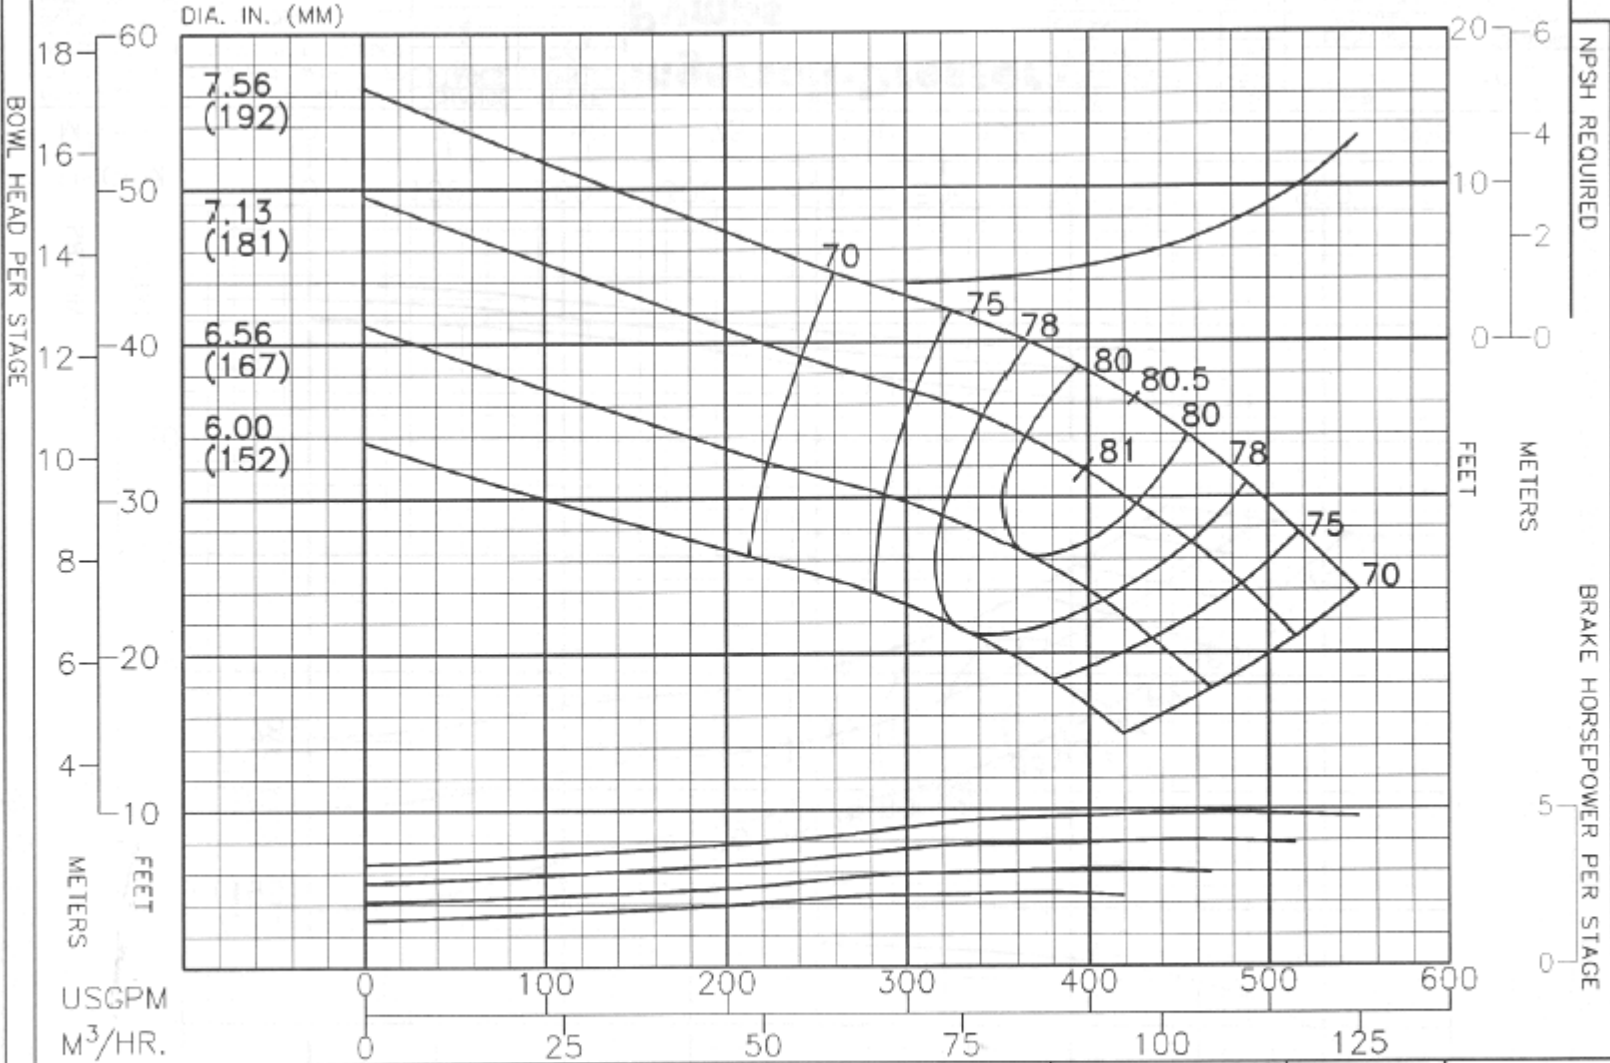

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-2
2	-1
3	0

Ingersoll-Dresser **Pumps**

THRUST FACTORS AT BEP		
IMPELLER	LBS/FT	KG/M
STANDARD	5.2	7.8
BALANCED	2.4	3.6
EYE AREA-11.7 SQ. IN.		

RPM
1770
ENCLOSED IMPELLER
N _s = 2460

PUMP
10KKL
CURVE NO.
EC-1458