

NPSH REQUIRED


BRAKE HORSEPOWER PER STAGE

METERS
FEET

METERS
FEET

DIA. IN. (MM)

BOWL HEAD PER STAGE
FEET
METERS
USGPM
M³/HR.

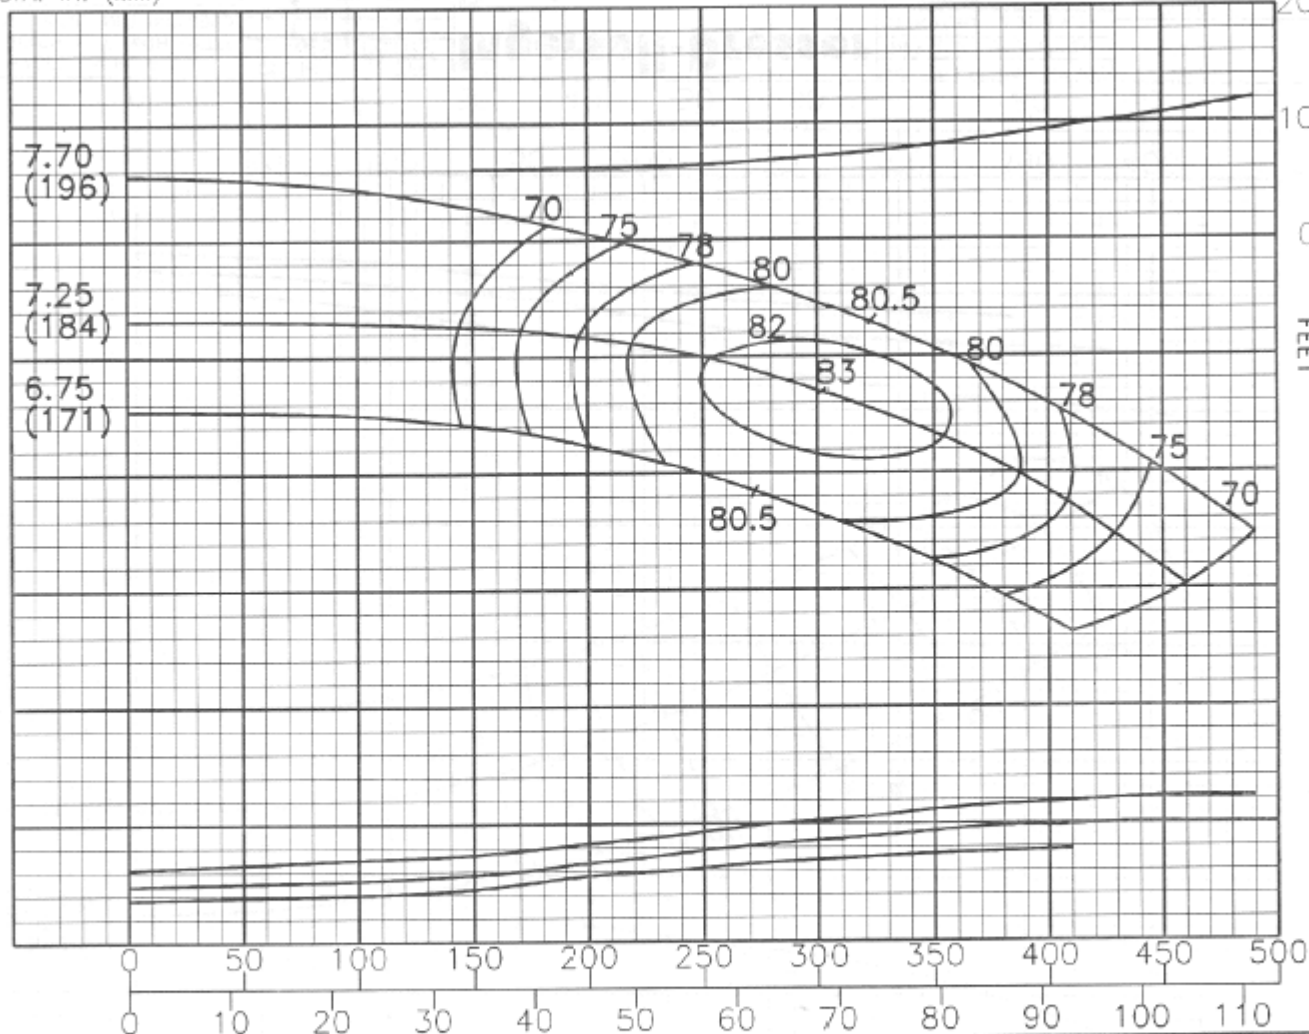

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-3.5
2	-2
3	-5

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP		
IMPELLER	LBS/FT	KG/M
STANDARD	2.25	3.35
BALANCED	---	---
EYE AREA	7.85 SQ. IN.	50.66 CM ²

RPM
1770
ENCLOSED IMPELLER
N _s = 1620

PUMP
10L30
CURVE NO.
EC-2356