

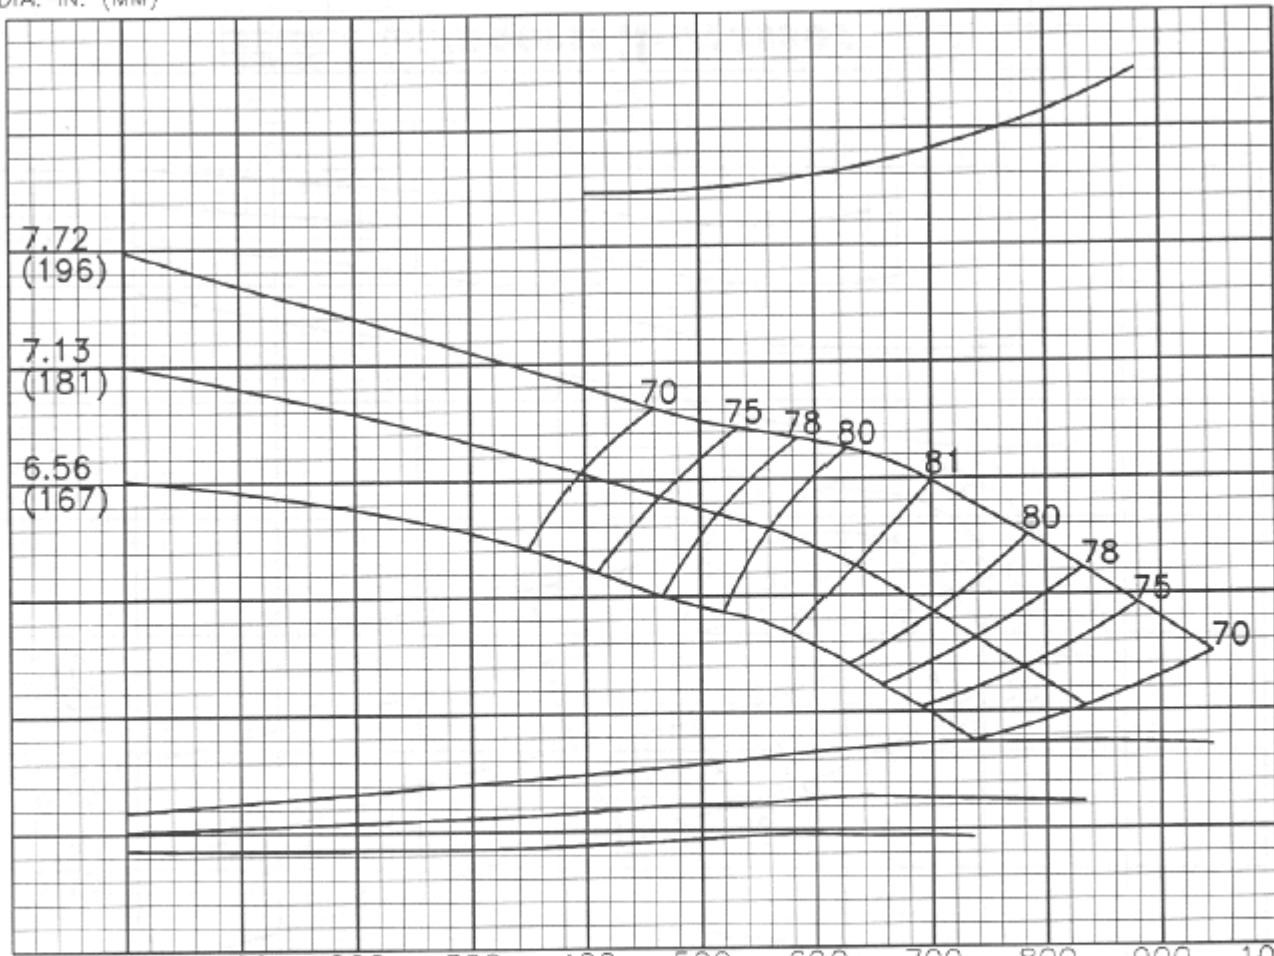
NPSH REQUIRED
BRAKE HORSEPOWER PER STAGE

 20
10
0
0
0
0

 FEET
METERS

 10
5
0

DIA. IN. (MM)


 USGPM
M³/HR.

 PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED

IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-2
2	-1
3	0

**Ingersoll-Dresser
Pumps**

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	6.1 9.1
BALANCED	3.1 4.6
EYE AREA-15.7 SQ. IN.	

 RPM
1770

 ENCLOSED
IMPELLER

 N_s = 2960

 PUMP
10LKH

CURVE NO.

EC-1595