

VTP VERTICAL PUMPS

BOWL HEAD PER STAGE

Ingersoll-Dresser Pump Company

PERFORMANCE

NPSH REQUIRED


BRAKE HORSEPOWER PER STAGE

40
20
0

FEET
METERS

10
5
0

DIA. IN. (MM)

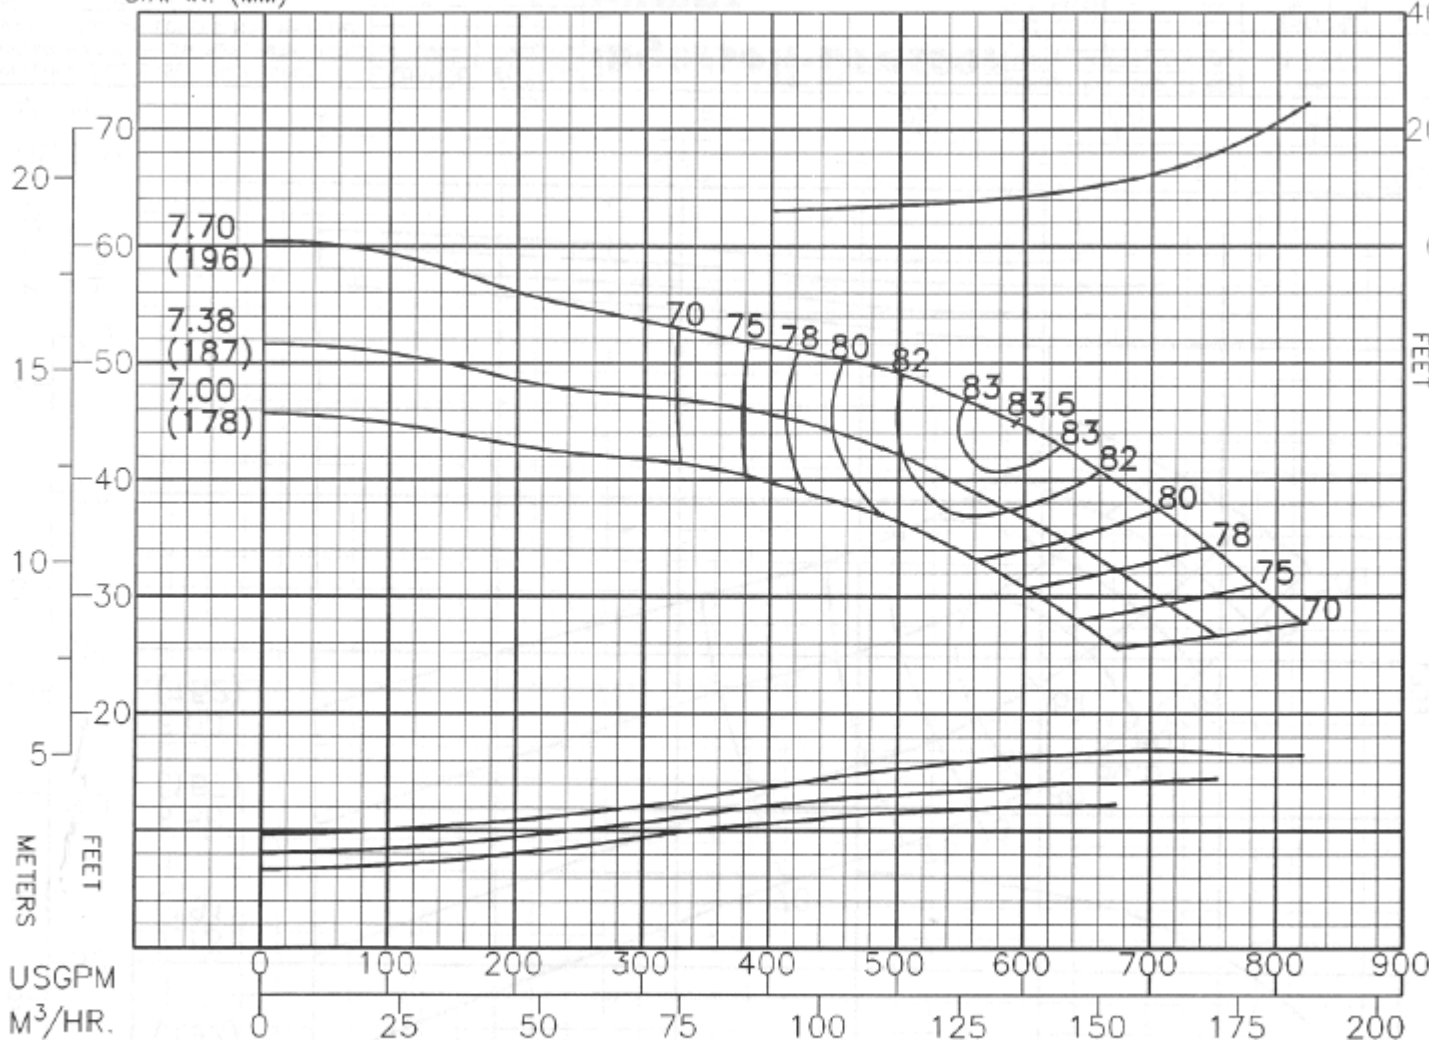

USGPM
M³/HR.

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE	IN EFF.
STAGES	POINTS
1	-2
2	-1.5
3	-1

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	
IMPELLER LBS/FT	KG/M
STANDARD	3.94 5.87
BALANCED	---
EYE AREA- 11.2 SQ. IN.	

RPM	1770
ENCLOSED IMPELLER	
N _s = 2480	

PUMP	10M50
CURVE NO.	EC-2368