


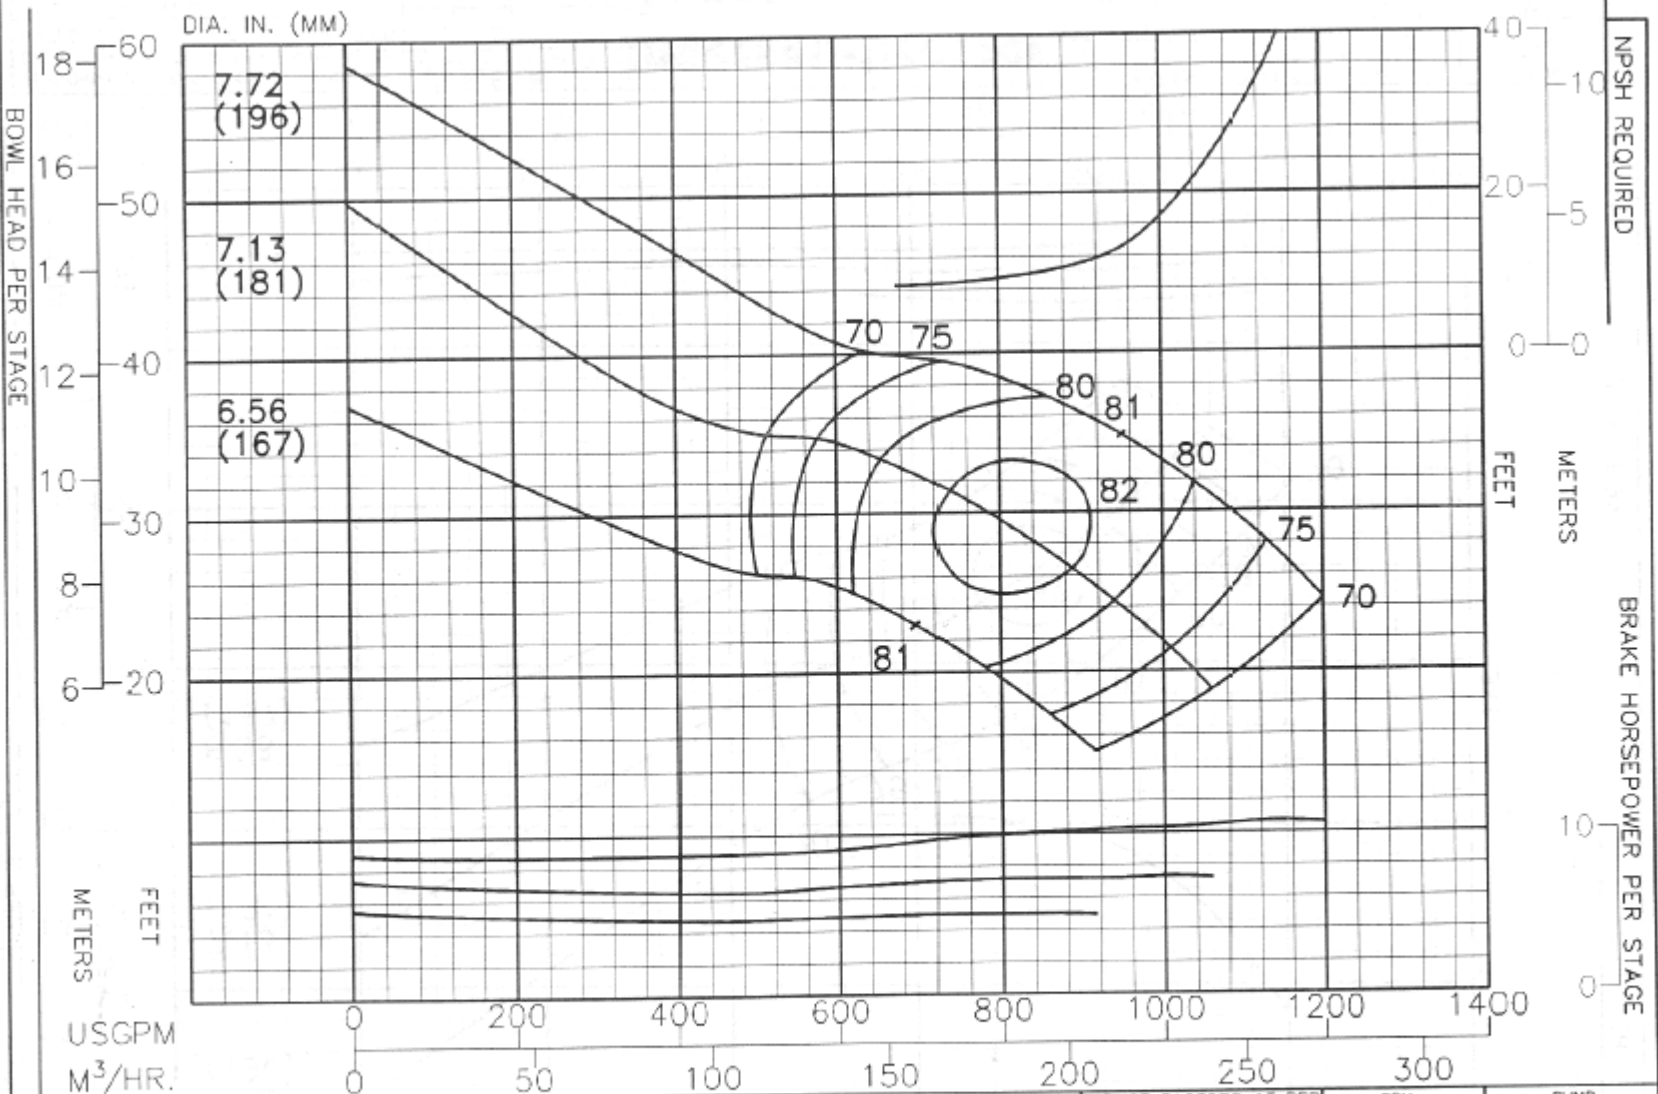

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED

IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-2
2	-1
3	0

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP		
IMPELLER	LBS/FT	KG/M
STANDARD	7.3	10.9
BALANCED	6.0	8.9
EYE AREA-17.2 SQ. IN.		

RPM
1770
ENCLOSED IMPELLER
N _s 3810

PUMP
10NKH
CURVE NO.
EC-1441