


BOWL HEAD PER STAGE

Ingersoll-Dresser Pump Company

PERFORMANCE

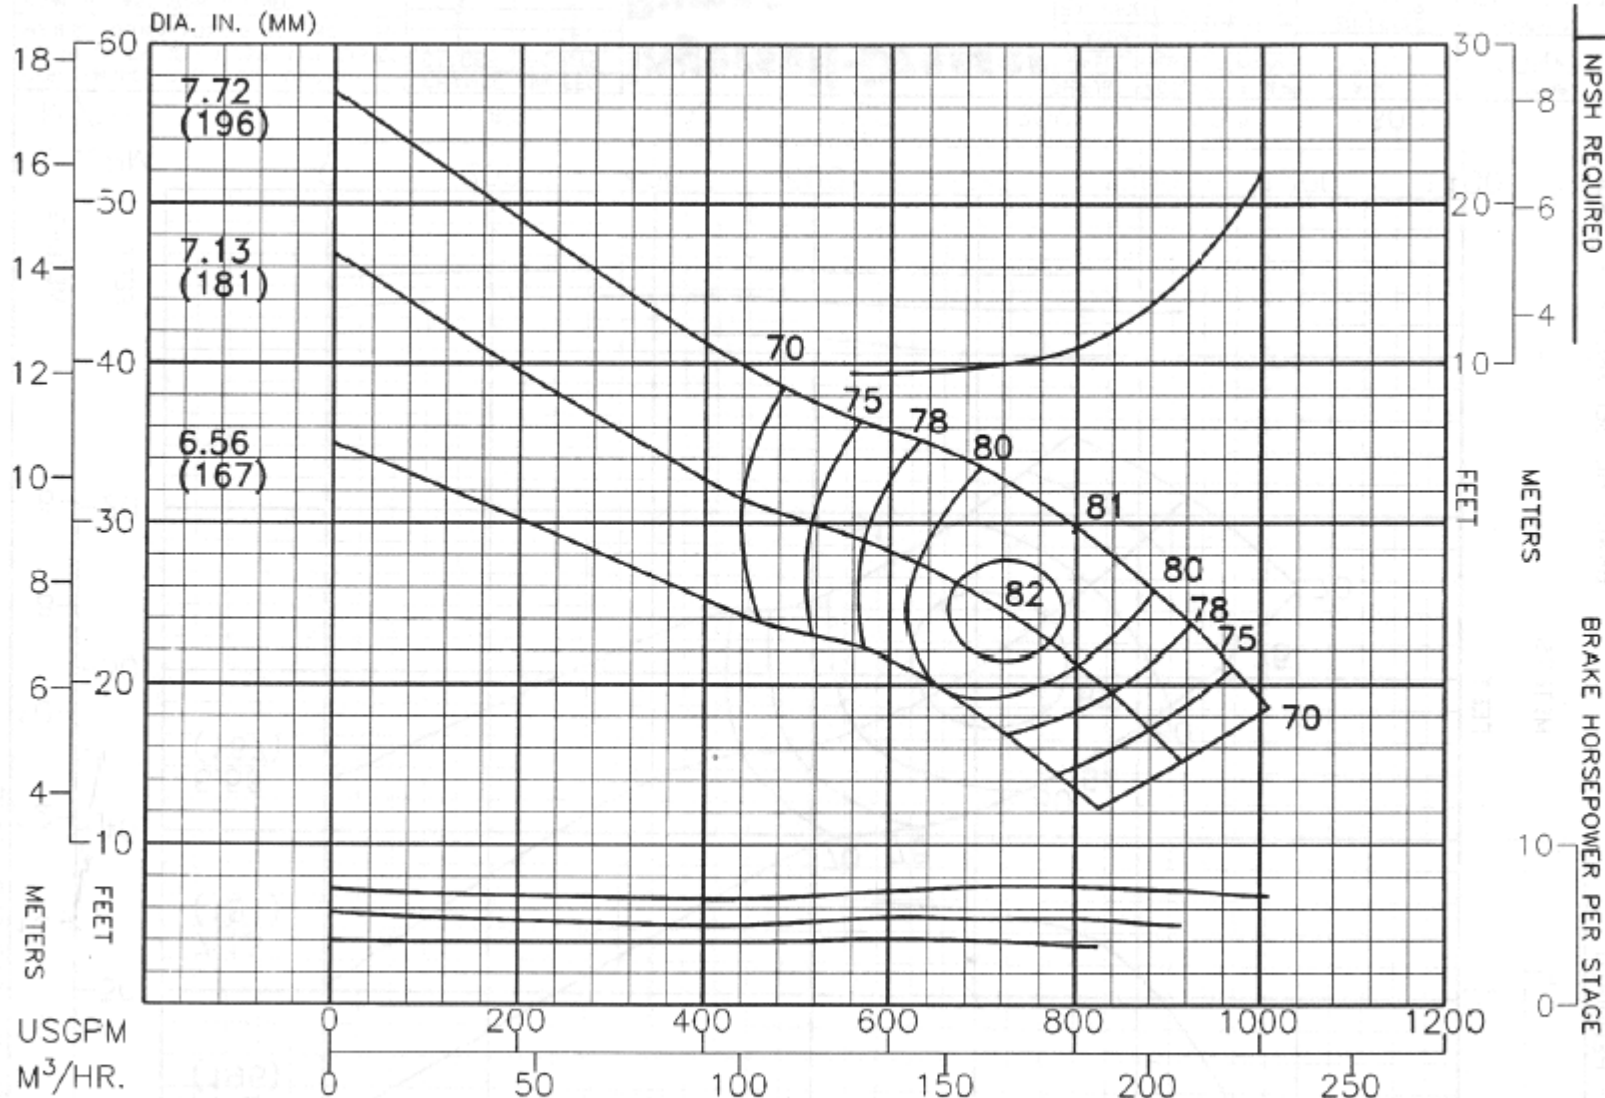

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-2
2	-1
3	0

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	7.6 11.3
BALANCED	6.0 8.9
EYE AREA-17.2 SQ. IN.	

RPM
1770
ENCLOSED IMPELLER
N _s = 3935

PUMP
10NKL
CURVE NO.
EC-1439