


BOWL HEAD PER STAGE

Ingersoll-Dresser Pump Company

PERFORMANCE

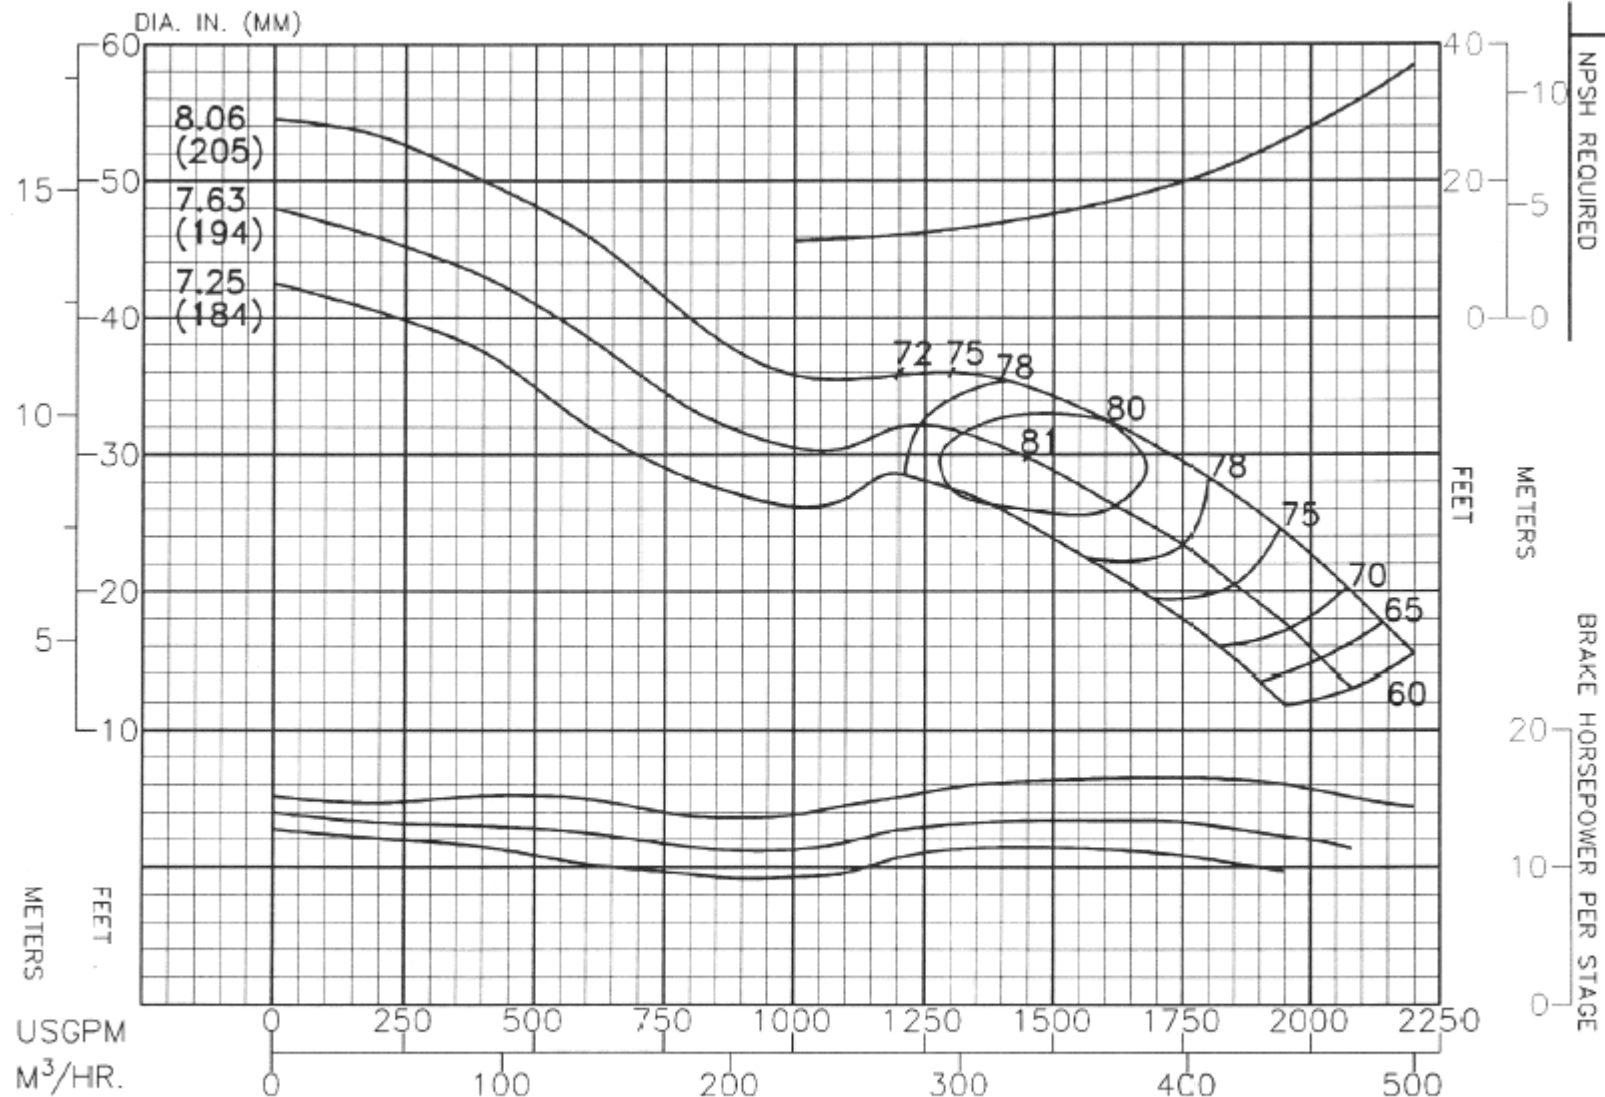

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-3
2	-2
3	-1
4	0

**Ingersoll-Dresser
Pumps**

THRUST FACTORS AT BEP	
IMPELLER LBS/FT	KG/M
STANDARD 11.0	16.4
BALANCED ---	---
EYE AREA - 26.0 SQ. IN.	

RPM	1770
ENCLOSED IMPELLER	
N _s = 5270	

PUMP	10QKH
CURVE NO.	
EC-2143	