


NPSH REQUIRED

BRAKE HORSEPOWER PER STAGE

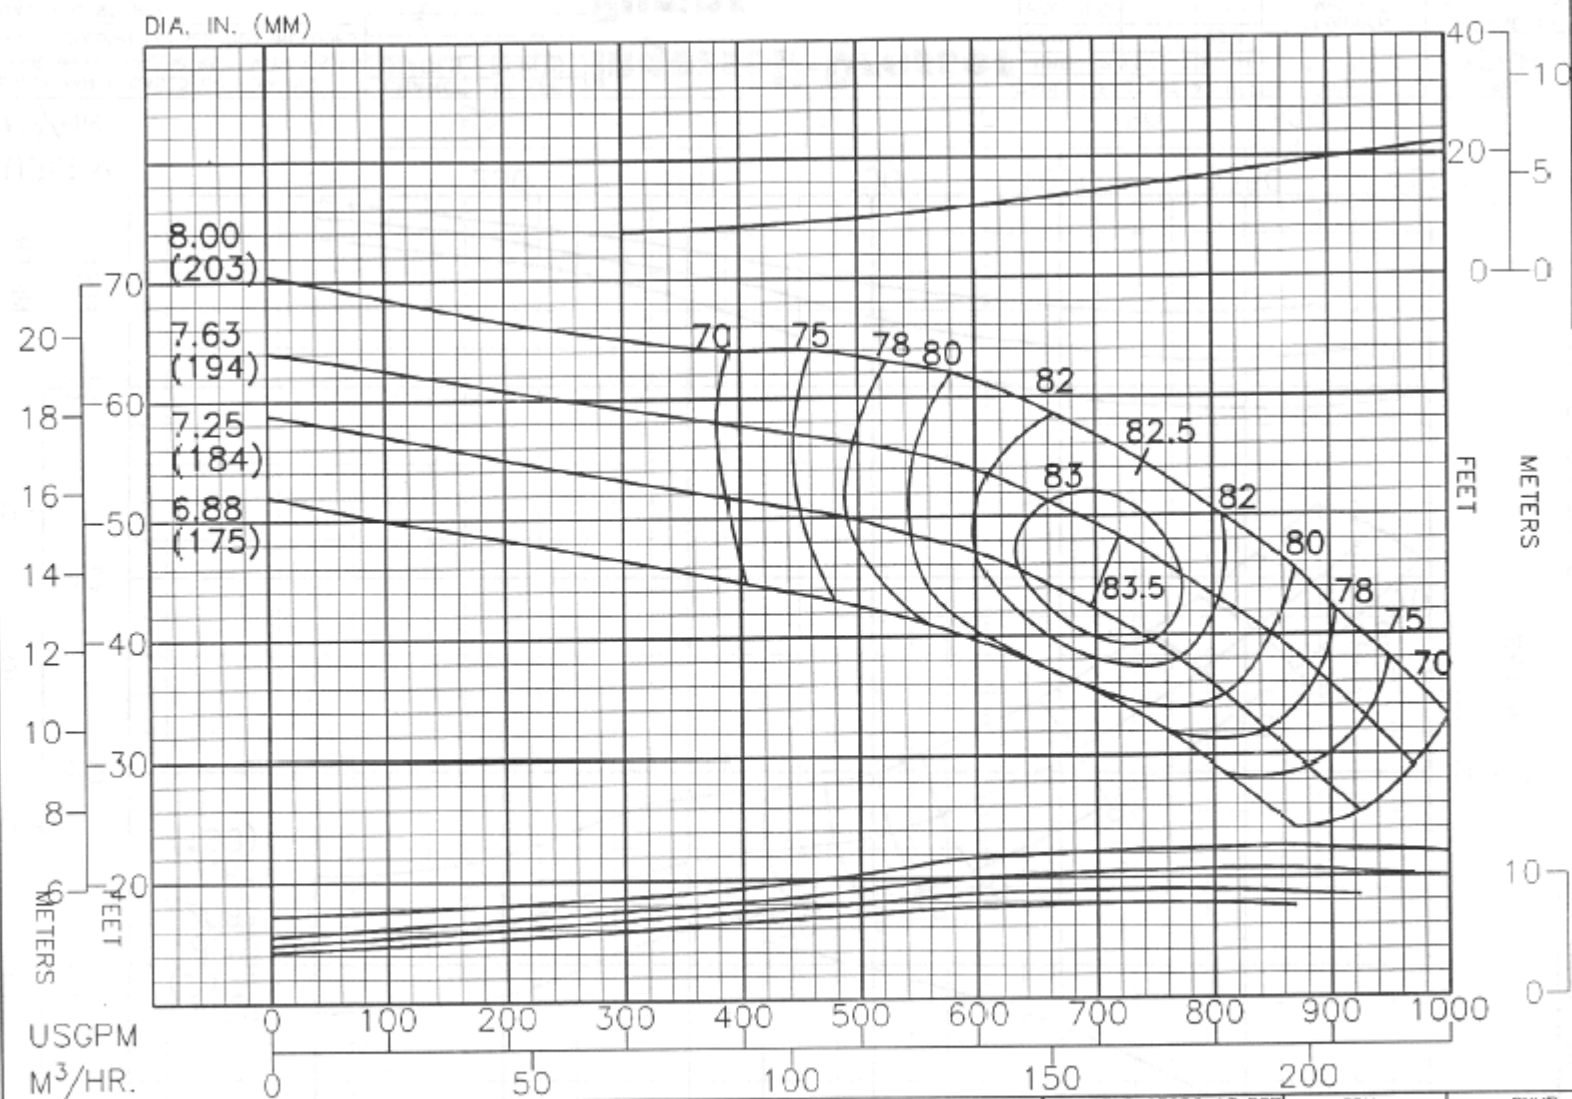

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED.

CHARGE	IN EFF.
STAGES	POINTS
1	42
2	-1
3	0

BOWL - CAST IRON - LINED
IMPELLER - BRONZE

Ingersoll-Dresser Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	11.0 16.4
BALANCED	--- ---
EYE AREA-16.0 SQ. IN.	

RPM
1770
SEMIOPEN IMPELLER
N _s = 2385

PUMP
12CM
CURVE NO.
EC-1473