


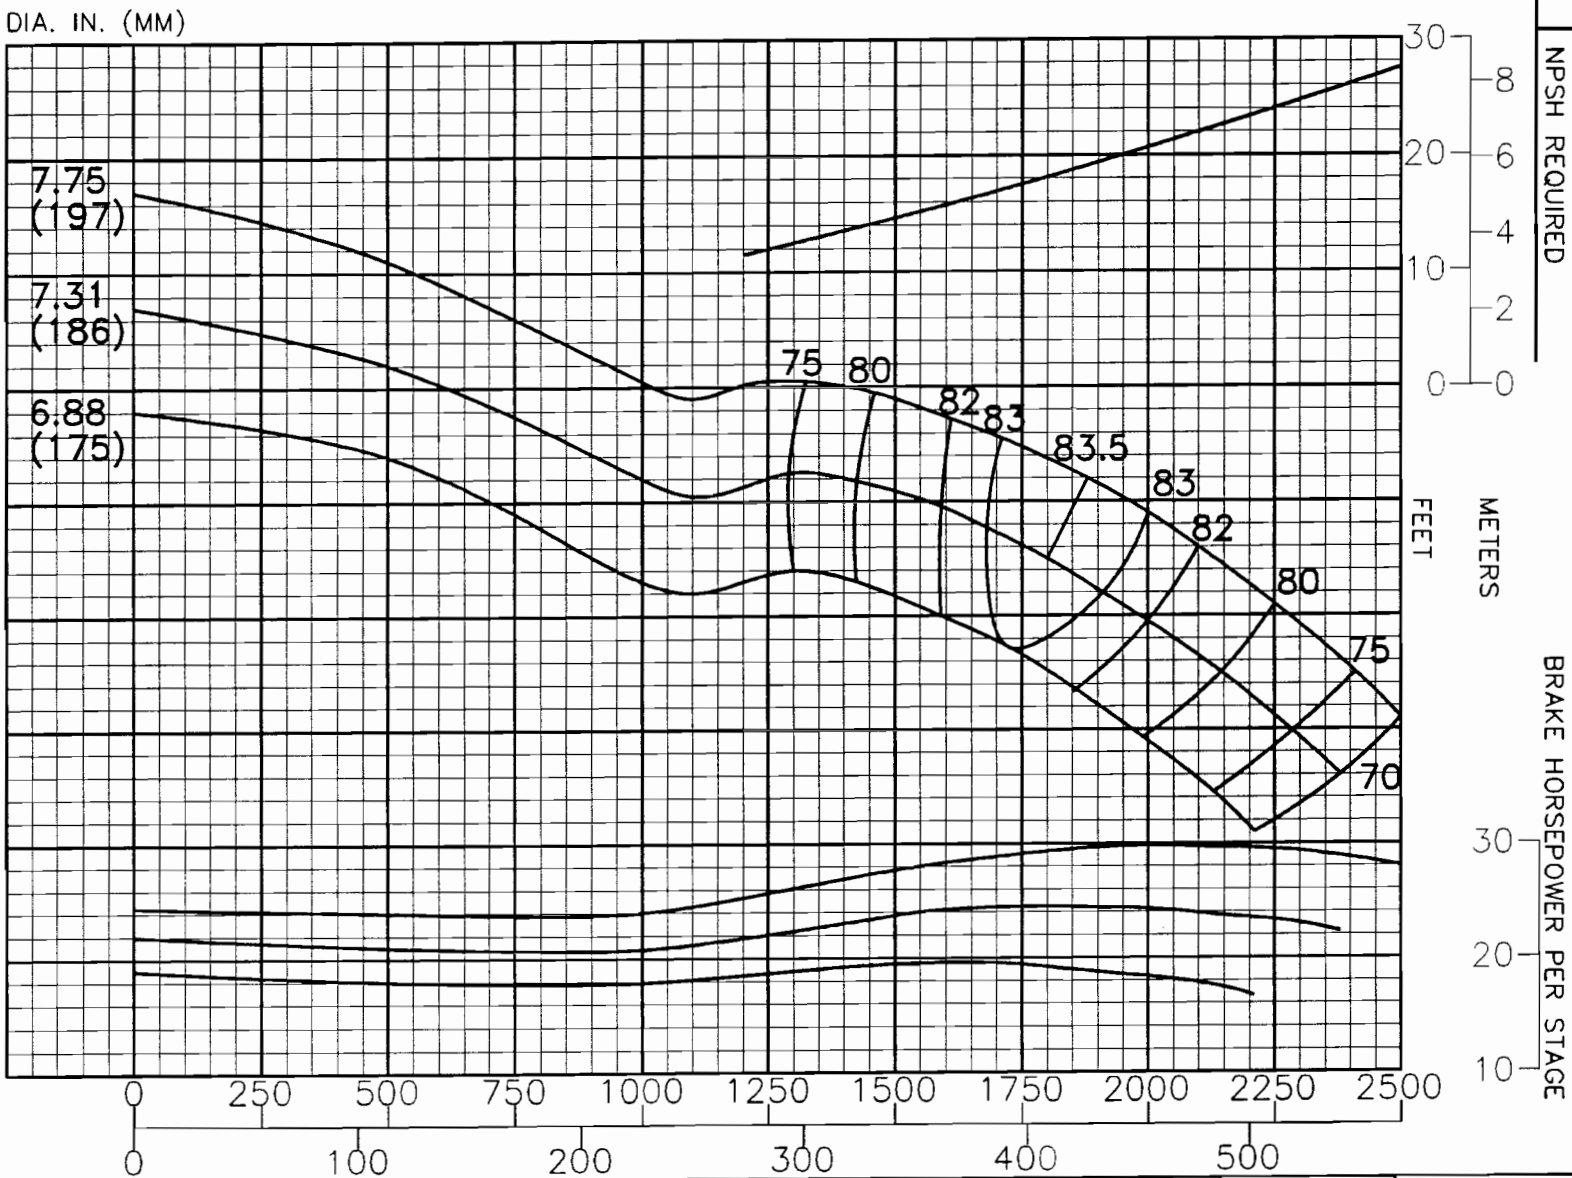

PERFORMANCE BASED ON PUMPING CLEAR WATER BELOW 85°F. WITH LISTED MATS. COLUMN LOSSES NOT INCLUDED.	CHANGE IN EFF.		Ingersoll-Dresser Pumps	THRUST FACTORS AT BEP		RPM 1770 SEMIOPEN IMPELLER N _s = 3940	PUMP 12DH CURVE NO. EC-1475
	STAGES	POINTS		IMPELLER	LBS/FT KG/M		
	1	-2		STANDARD	23.0 34.3		
	2	-1		BALANCED	---		
BOWL - CAST IRON - LINED	3	0		EYE AREA-33.4 SQ. IN.			
IMPELLER - BRONZE							