


NPSH REQUIRED

BRAKE HORSEPOWER PER STAGE

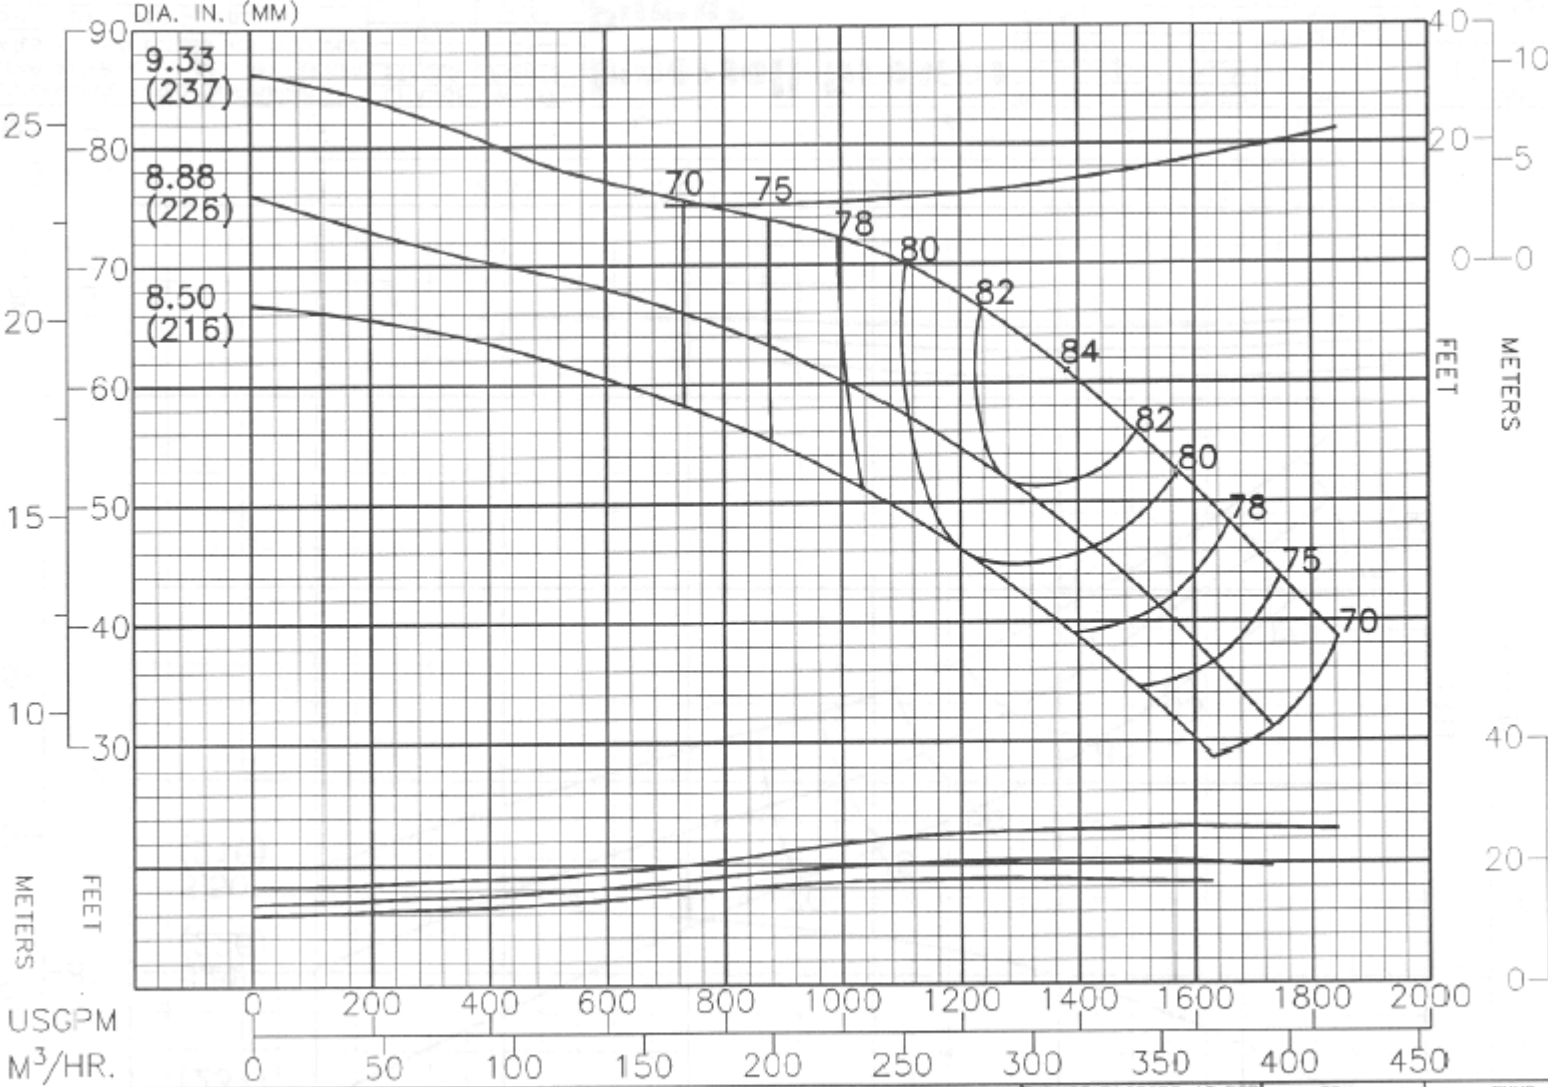

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-2
2	-1
3	-.5

Ingersoll-Dresser Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	7.48 11.1
BALANCED	--- ---
EYE AREA	21.5 SQ. IN.

RPM
1770
ENCLOSED IMPELLER
N _s = 3010

PUMP
12H135
CURVE NO.
EC-2388