


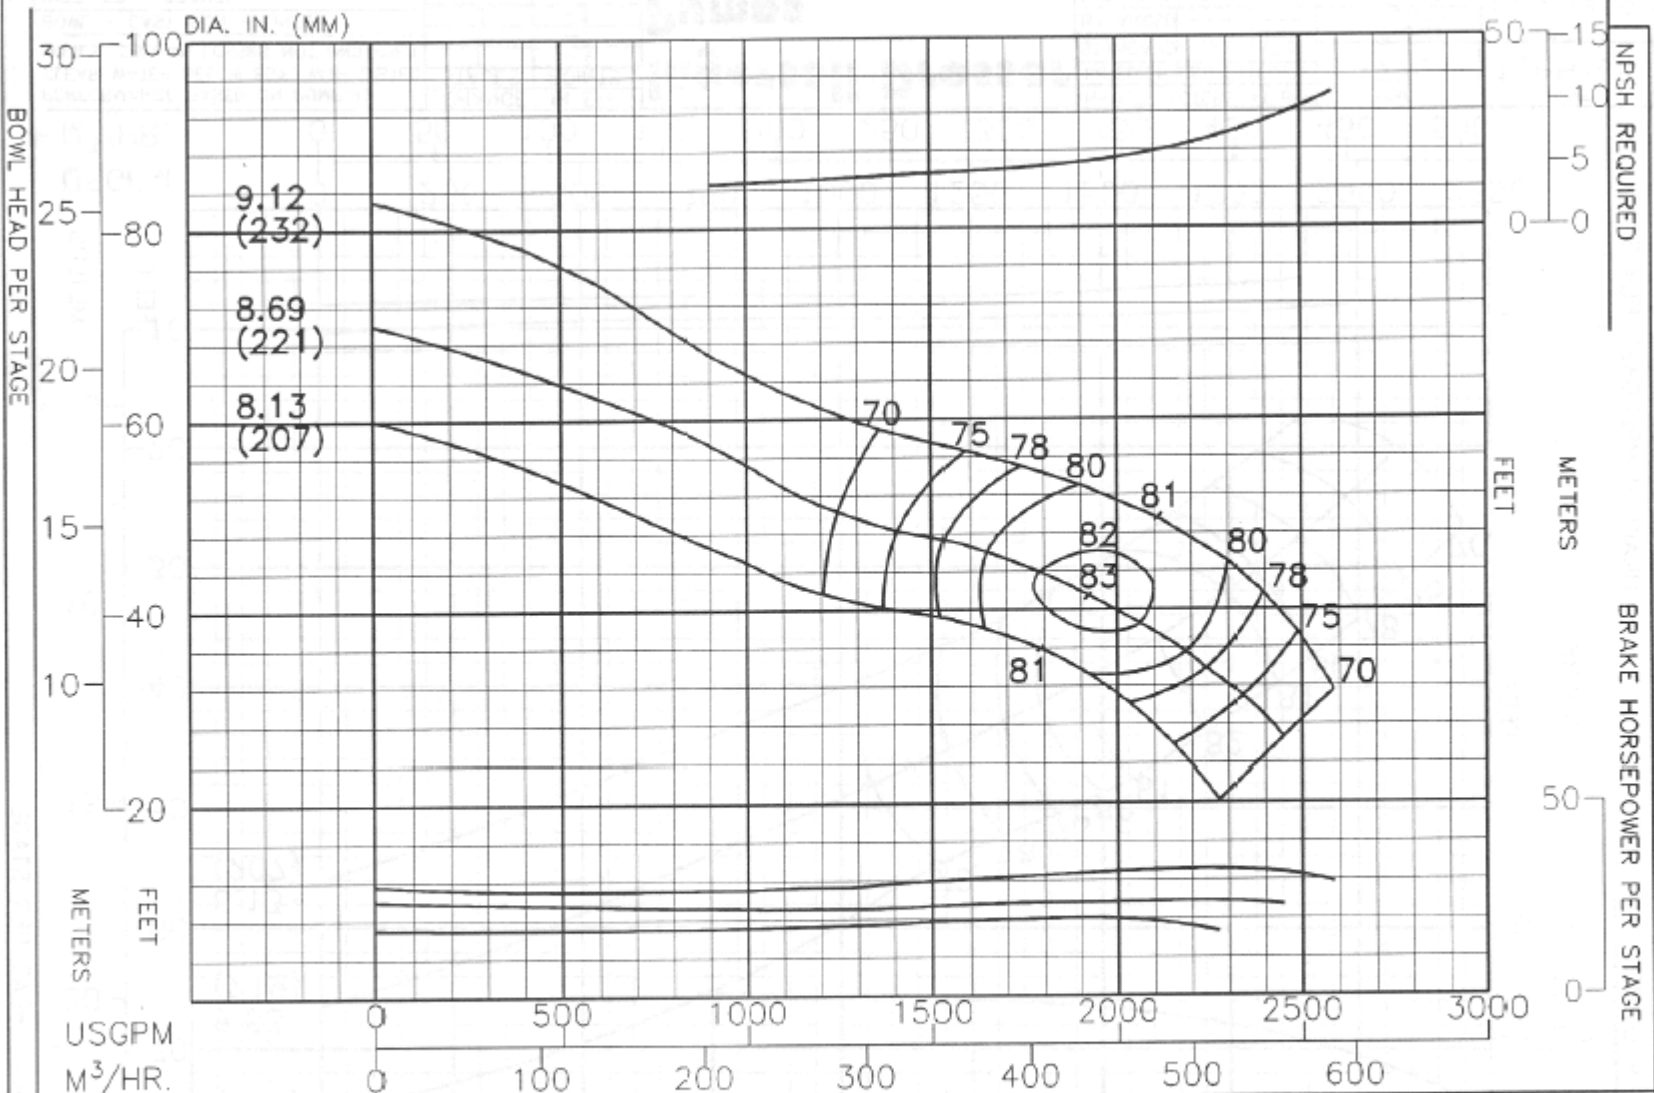

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-4
2	-2
3	-1

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	11.8 17.6
BALANCED	--- ---
EYE AREA	33.5 SQ. IN.

RPM	1770
ENCLOSED IMPELLER	
N _s	4360

PUMP	12HH220
CURVE NO.	EC-2420