


BOWL HEAD PER STAGE

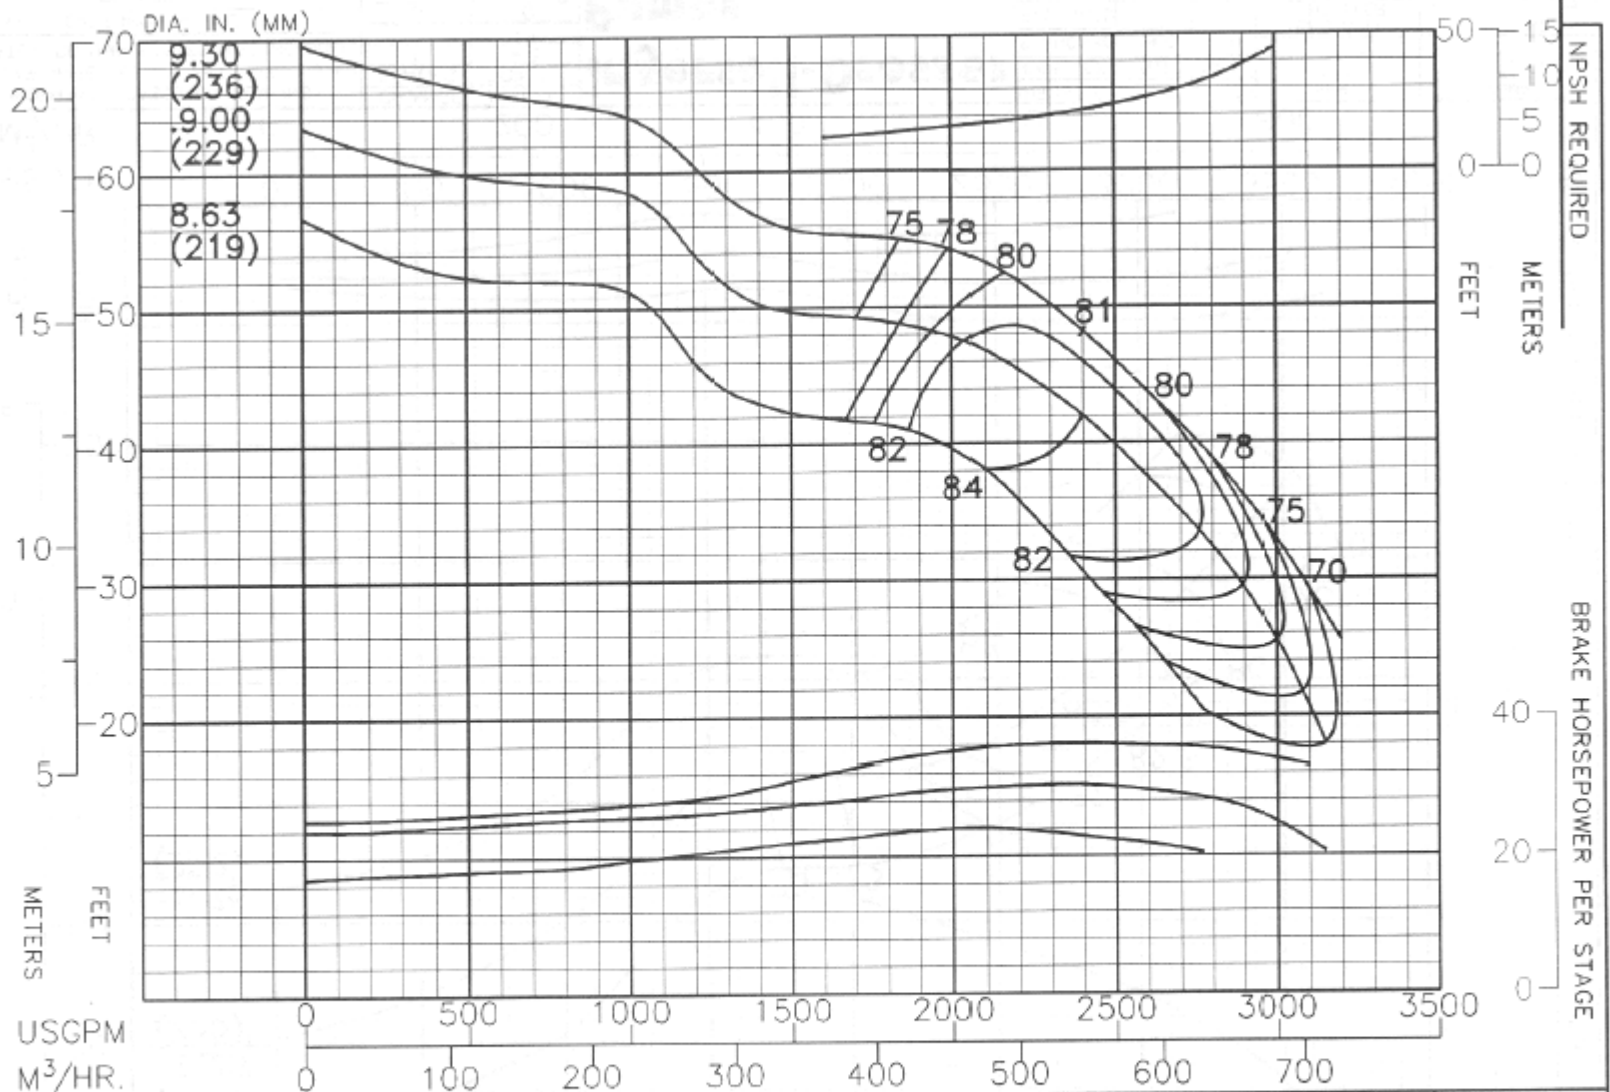

PERFORMANCE BASED ON PUMPING CLEAR WATER BELOW 85°F. WITH LISTED MATLS. COLUMN LOSSES NOT INCLUDED. BOWL - CAST IRON - LINED IMPELLER - BRONZE	CHANGE IN EFF.		Ingersoll-Dresser Pumps	THRUST FACTORS AT BEP		RPM 1770	PUMP 12HHH245
	STAGES	POINTS		IMPELLER	LBS/FT KG/M		
	1	-1		STANDARD	13.7 20.4	ENCLOSED IMPELLER	CURVE NO. EC-2433
	2	-5		BALANCED	---		
	3	0			EYE AREA- 35.8 SQ. IN.		