


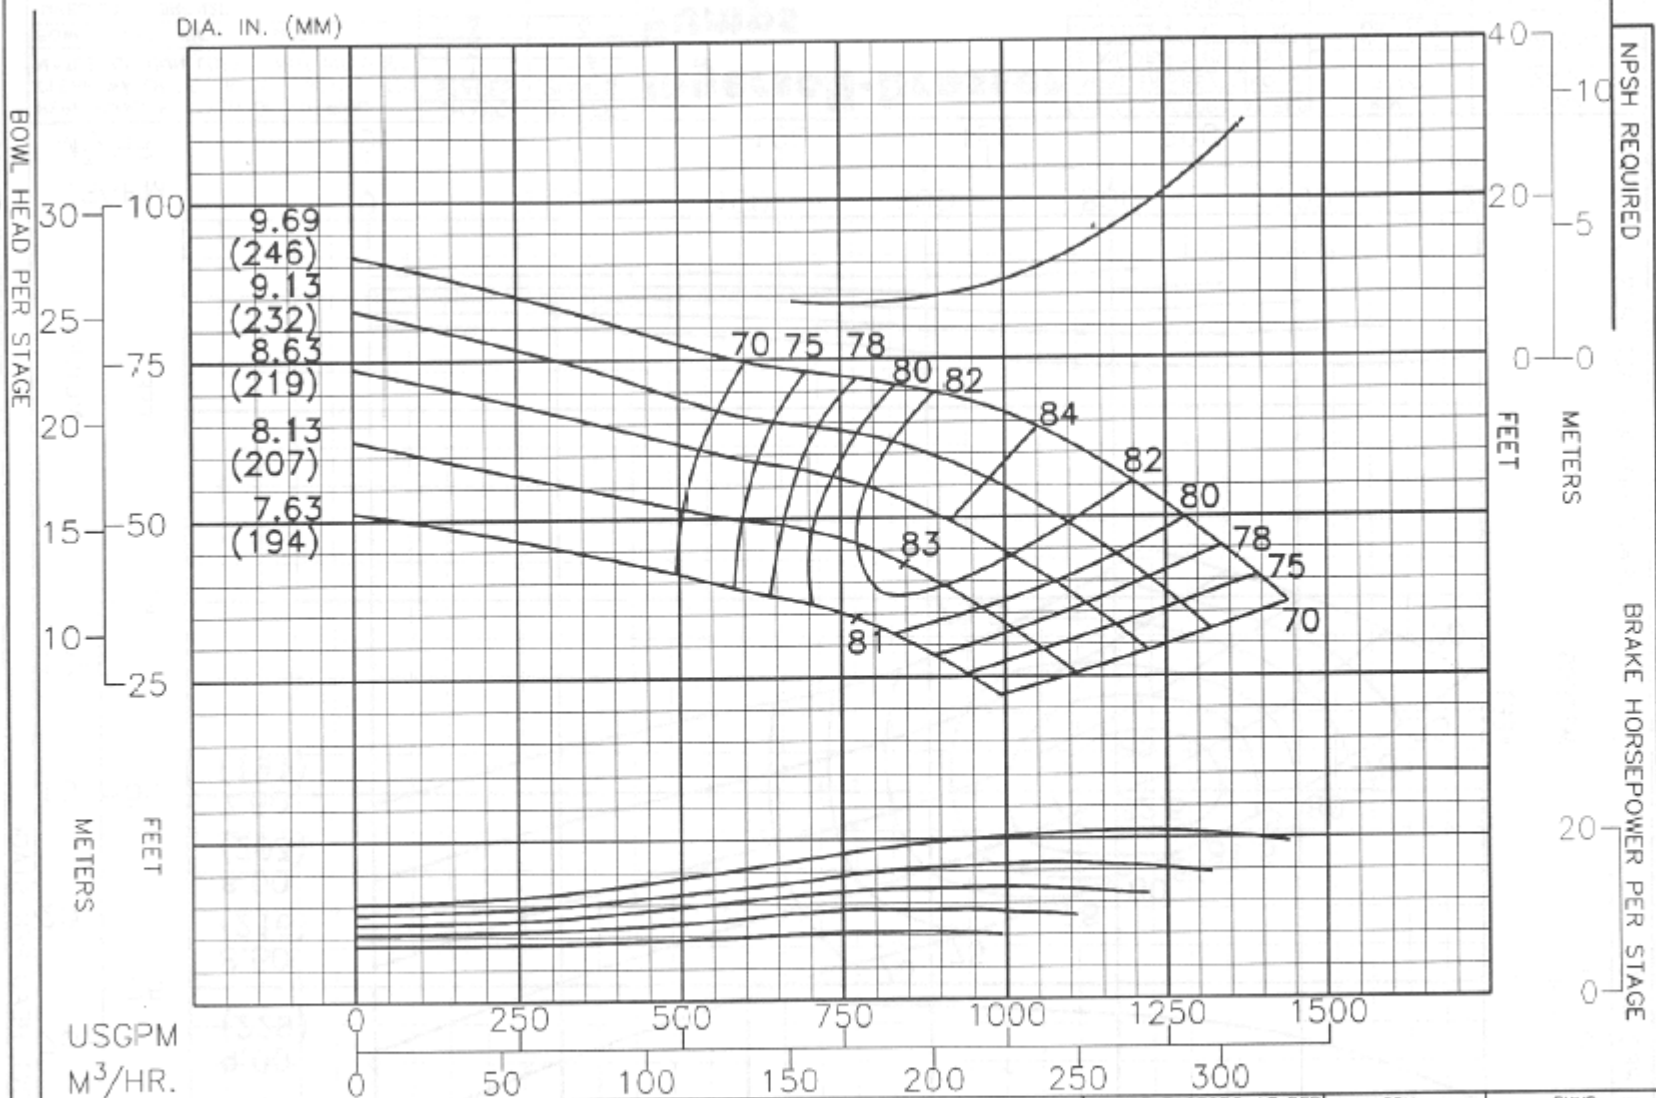

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED

IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-3
2	-2
3	-1
4	0

**Ingersoll-Dresser
Pumps**

IMPELLER	THRUST FACTORS AT BEP	
	LBS/FT	KG/M
STANDARD	7.0	10.4
BALANCED	4.4	6.6
EYE AREA-19.0 SQ. IN.		

RPM	1770
ENCLOSED IMPELLER	
N _s	2535

PUMP	12KKH
CURVE NO.	EC-1383