


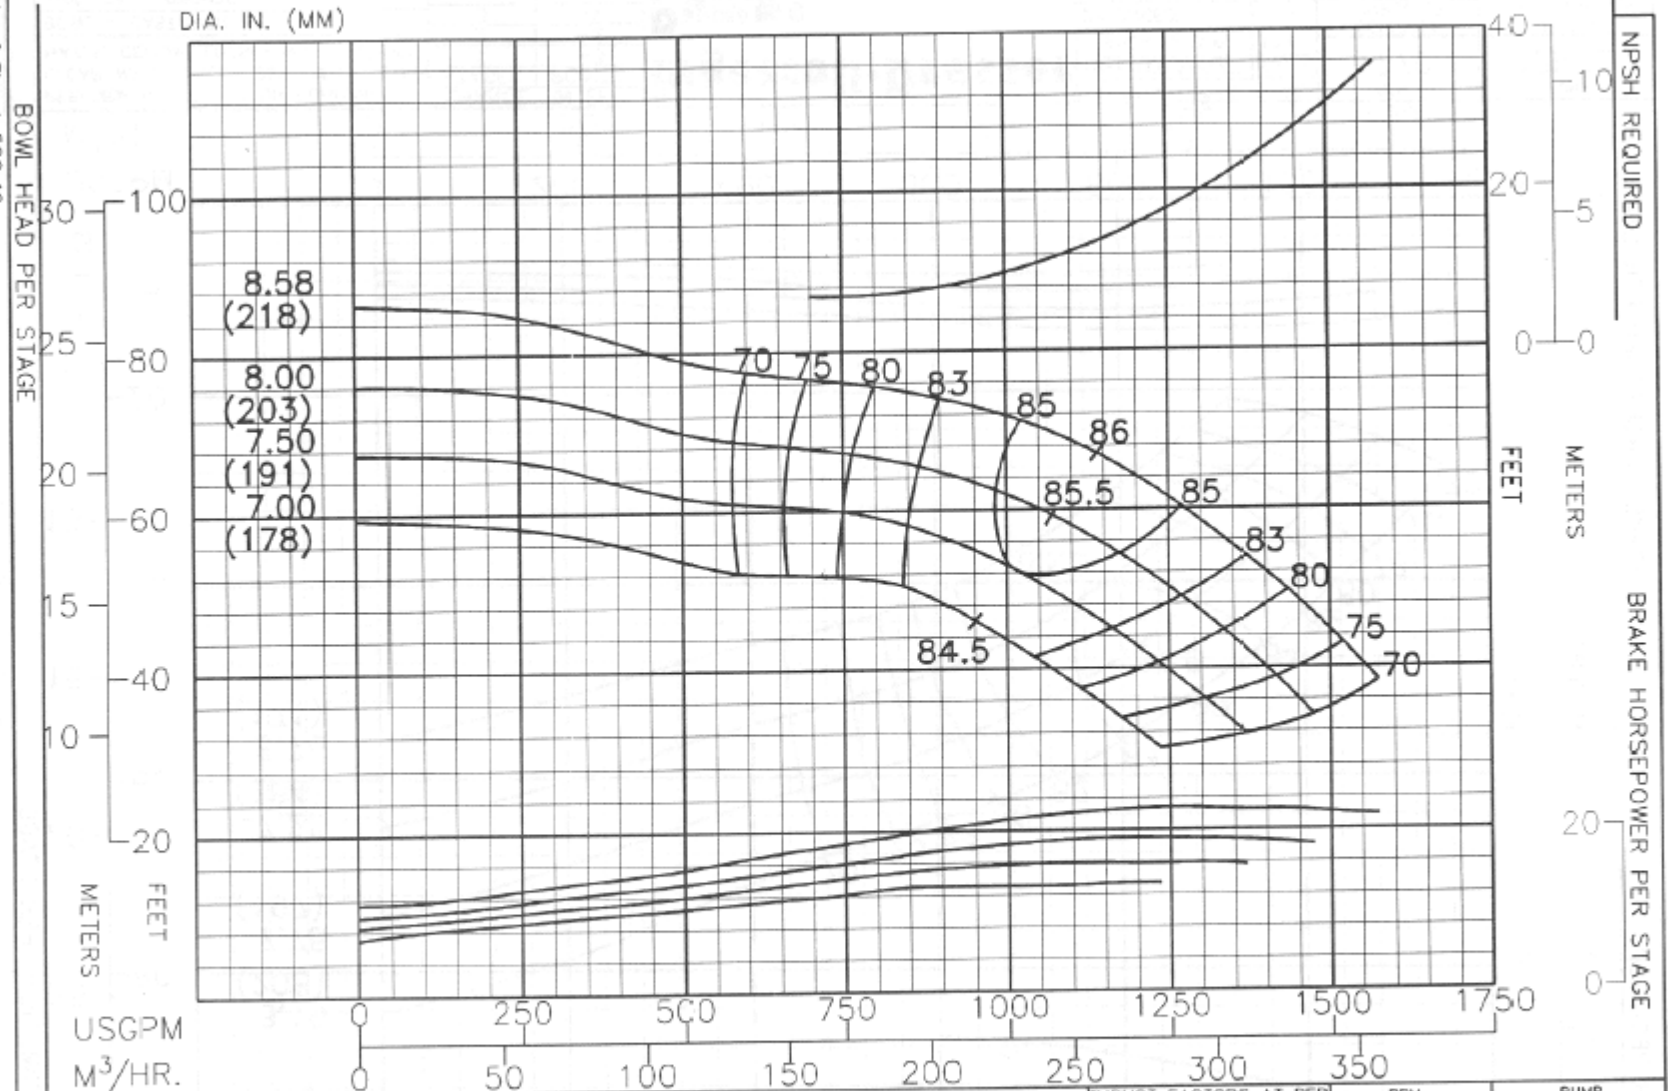

PERFORMANCE BASED ON PUMPING  
CLEAR WATER BELOW 85°F. WITH LISTED  
MATLS. COLUMN LOSSES NOT INCLUDED.

| BOWL - CAST IRON | IMPPELLER - BRONZE |
|------------------|--------------------|
|------------------|--------------------|

| CHANGE<br>STAGES | IN EFF.<br>POINTS |
|------------------|-------------------|
| 1                | -3                |
| 2                | -2                |
| 3                | -1                |
| 4                | 0                 |

# Ingersoll-Dresser Pumps

| THRUST FACTORS AT BEP |              |
|-----------------------|--------------|
| IMPELLER              | LBS/FT KG/M  |
| STANDARD              | 11.0 16.4    |
| BALANCED              | ---          |
| EYE AREA              | 19.4 SQ. IN. |

| RPM                   |
|-----------------------|
| 1770                  |
| SEMIOPEN<br>IMPELLER  |
| N <sub>s</sub> = 2550 |

| PUMP      |
|-----------|
| 12KSH     |
| CURVE NO. |
| EC-1693   |