


NPSH REQUIRED

BRAKE HORSEPOWER PER STAGE

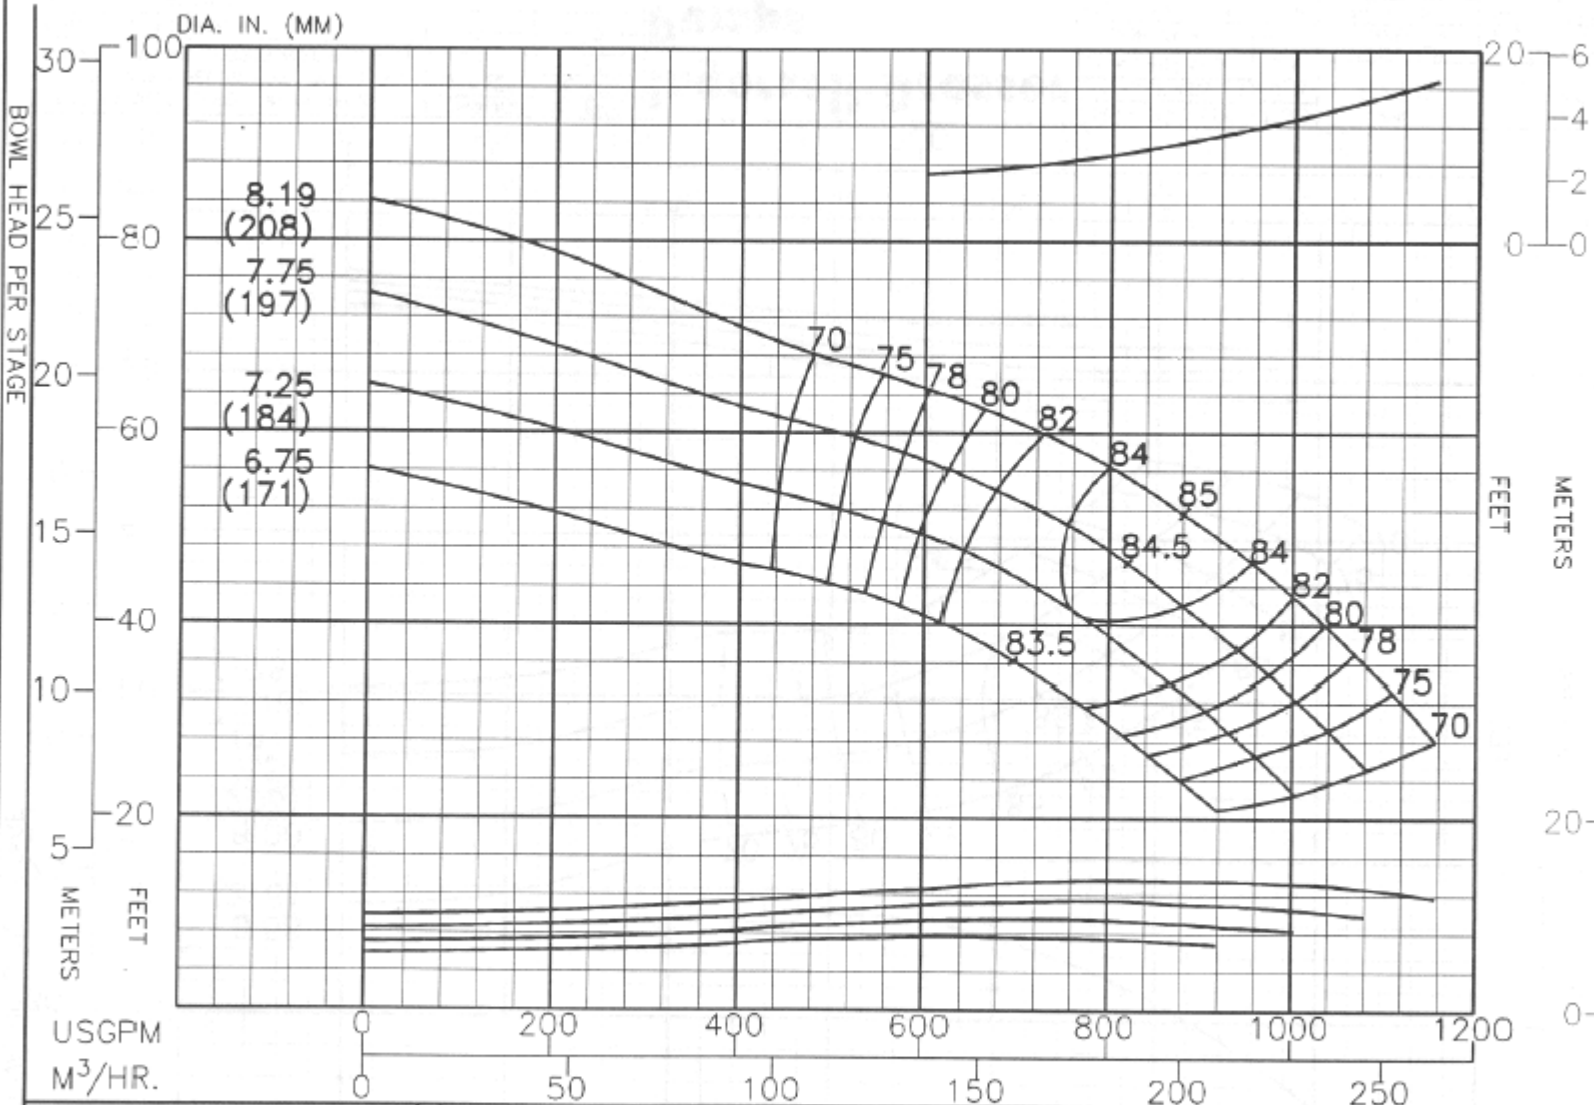

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-3
2	-2
3	-1
4	0

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP		
IMPELLER	LBS/FT	KG/M
STANDARD	11.8	17.6
BALANCED	---	---
EYE AREA-19.4 SQ. IN.		

RPM	1770
SEMIOPEN IMPELLER	
N _s	2720

PUMP	12KSL
CURVE NO.	EC-1926