

NPSH REQUIRED


BRAKE HORSEPOWER PER STAGE

20
10
0

FEET
METERS

10
0

DIA. IN. (MM)

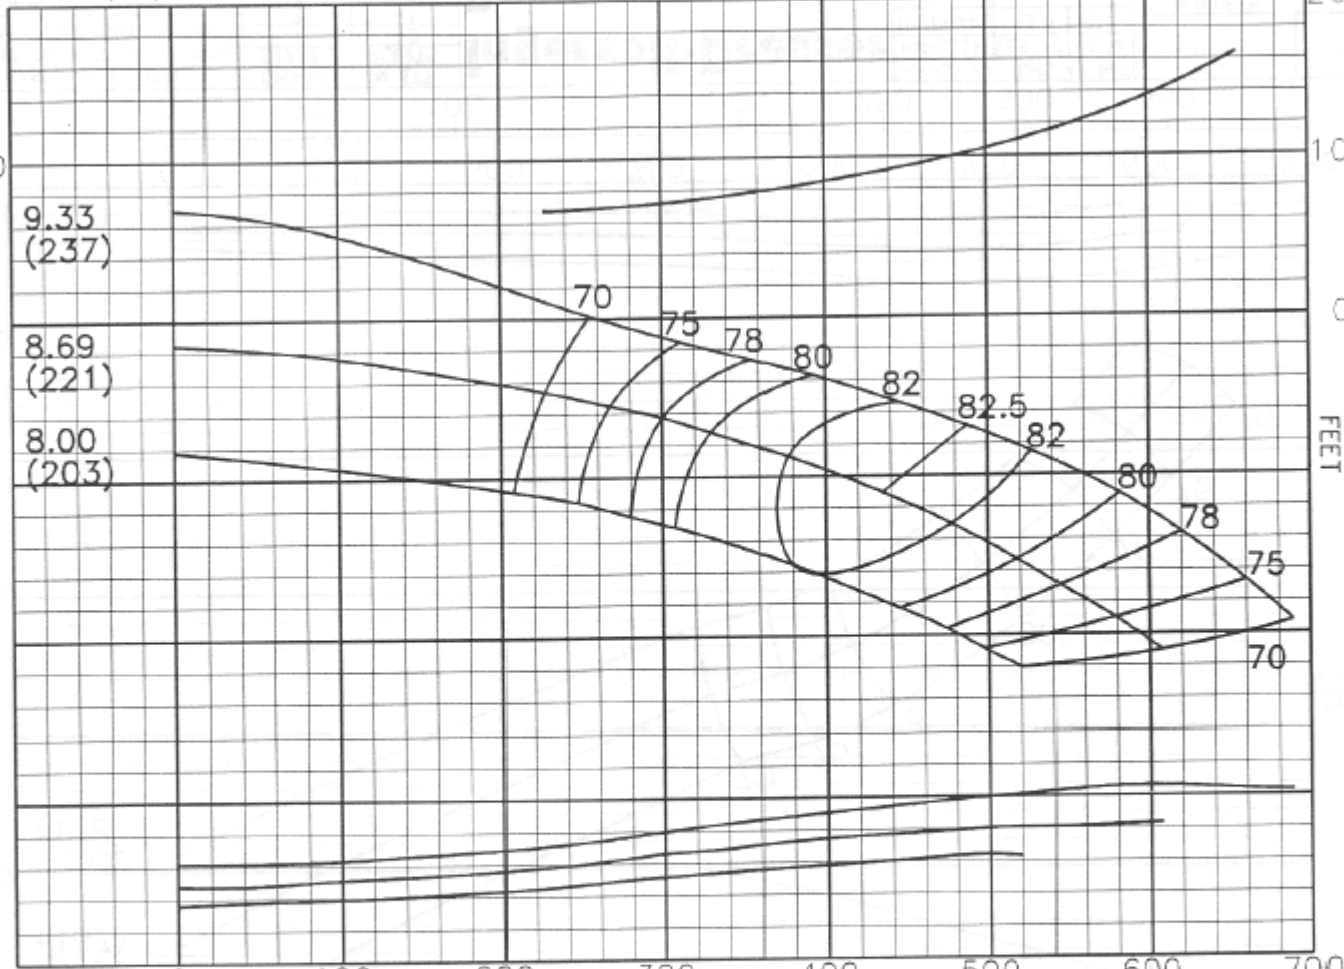

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-1
2	-.5
3	0

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	
IMPELLER LBS/FT	KG/M
STANDARD 4.26	6.35
BALANCED ---	---
EYE AREA- 11.95 SQ. IN.	

RPM
1770
ENCLOSED IMPELLER
N _s = 1600

PUMP
12L40
CURVE NO.
EC-2358