


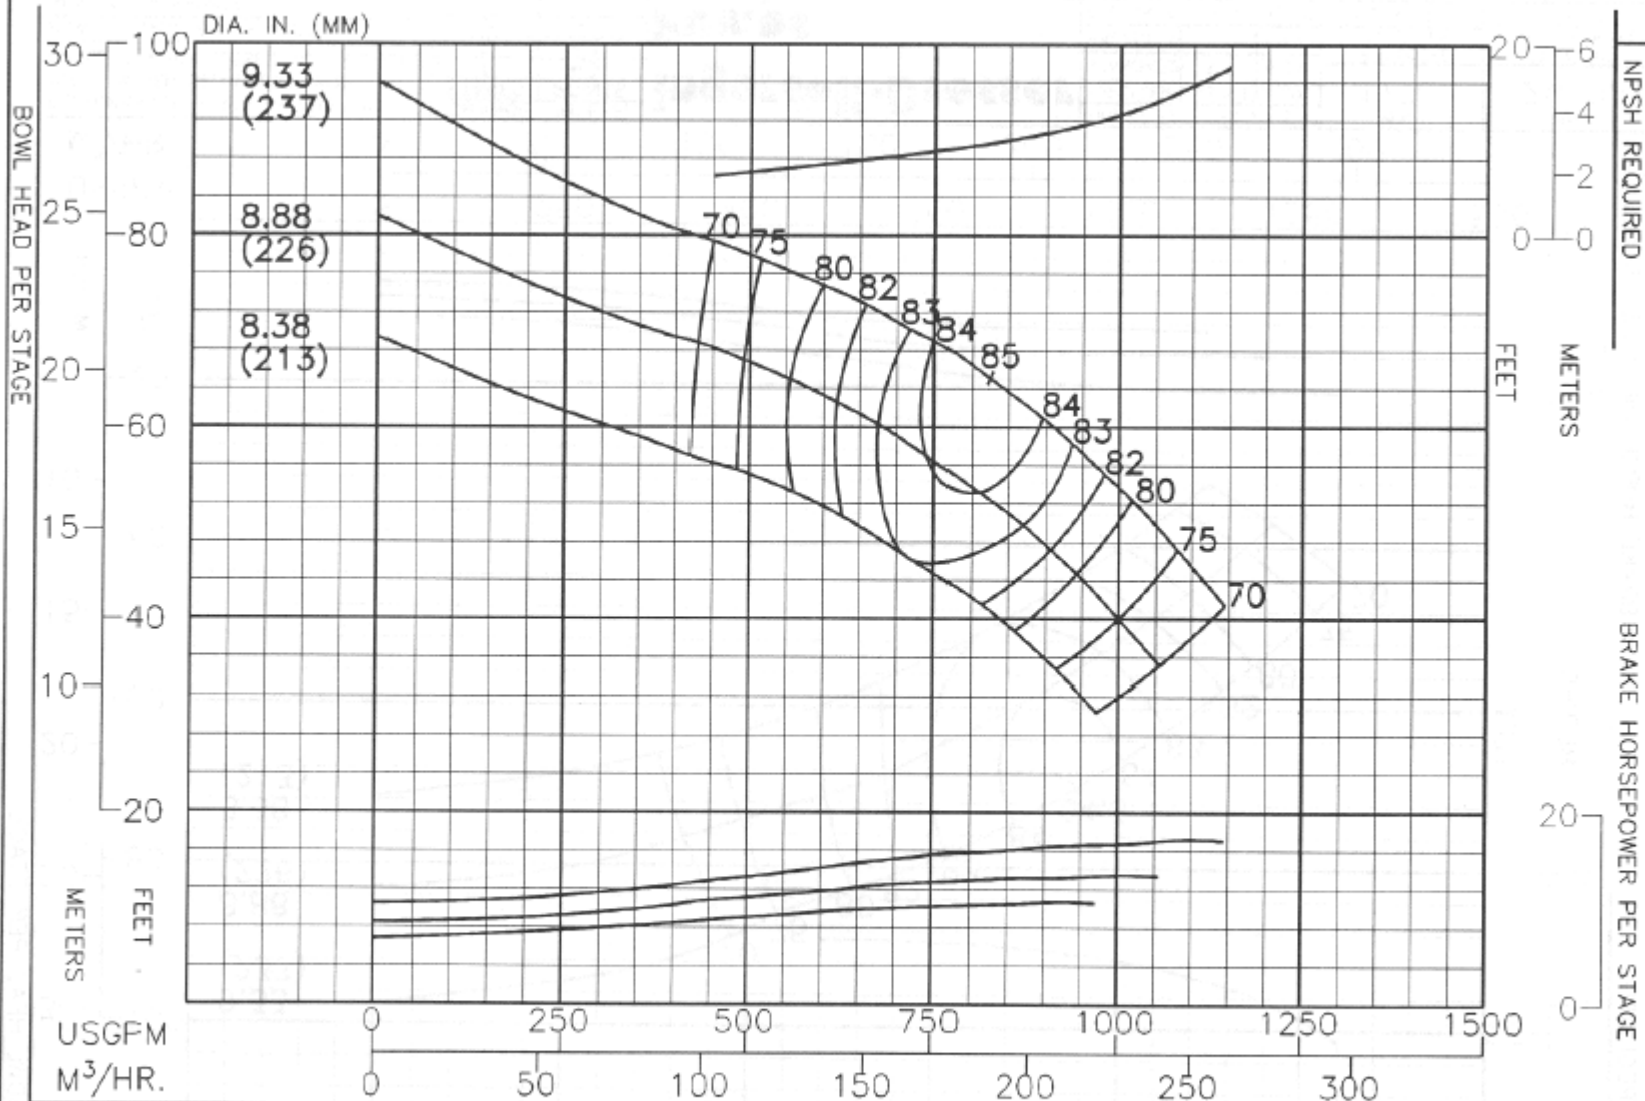

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE	IN EFF.
STAGES	POINTS
1	-3
2	-2
3	-1

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	6.29 9.37
BALANCED	--- ---
EYE AREA	16.9 SQ. IN.

RPM	1770
ENCLOSED IMPELLER	
N _s	2510

PUMP	12M75
CURVE NO.	EC-2370