


BOWL HEAD PER STAGE

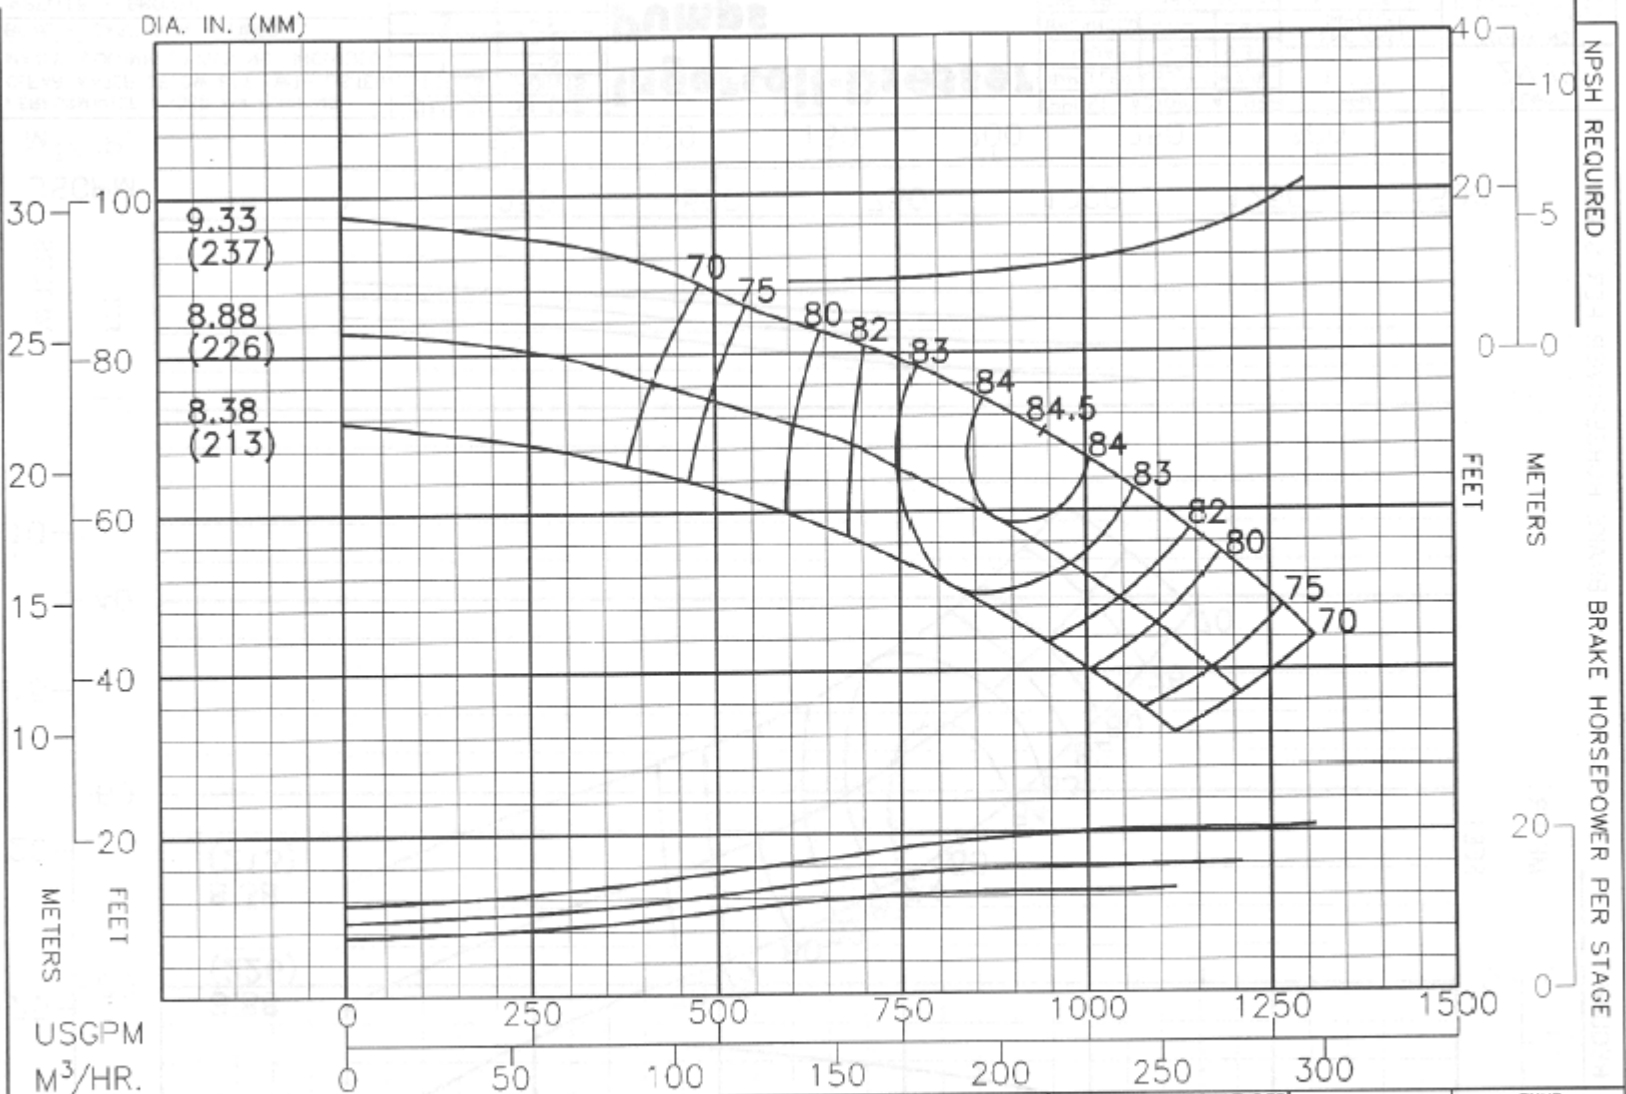

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-3
2	-2
3	-1

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	IMPELLER	LBS/FT	KG/M
STANDARD	5.43	8.09	
BALANCED	---	---	
EYE AREA	16.9	SQ. IN.	

RPM	1770
ENCLOSED IMPELLER	
N _s	2240

PUMP	12M90A
CURVE NO.	EC-2371