


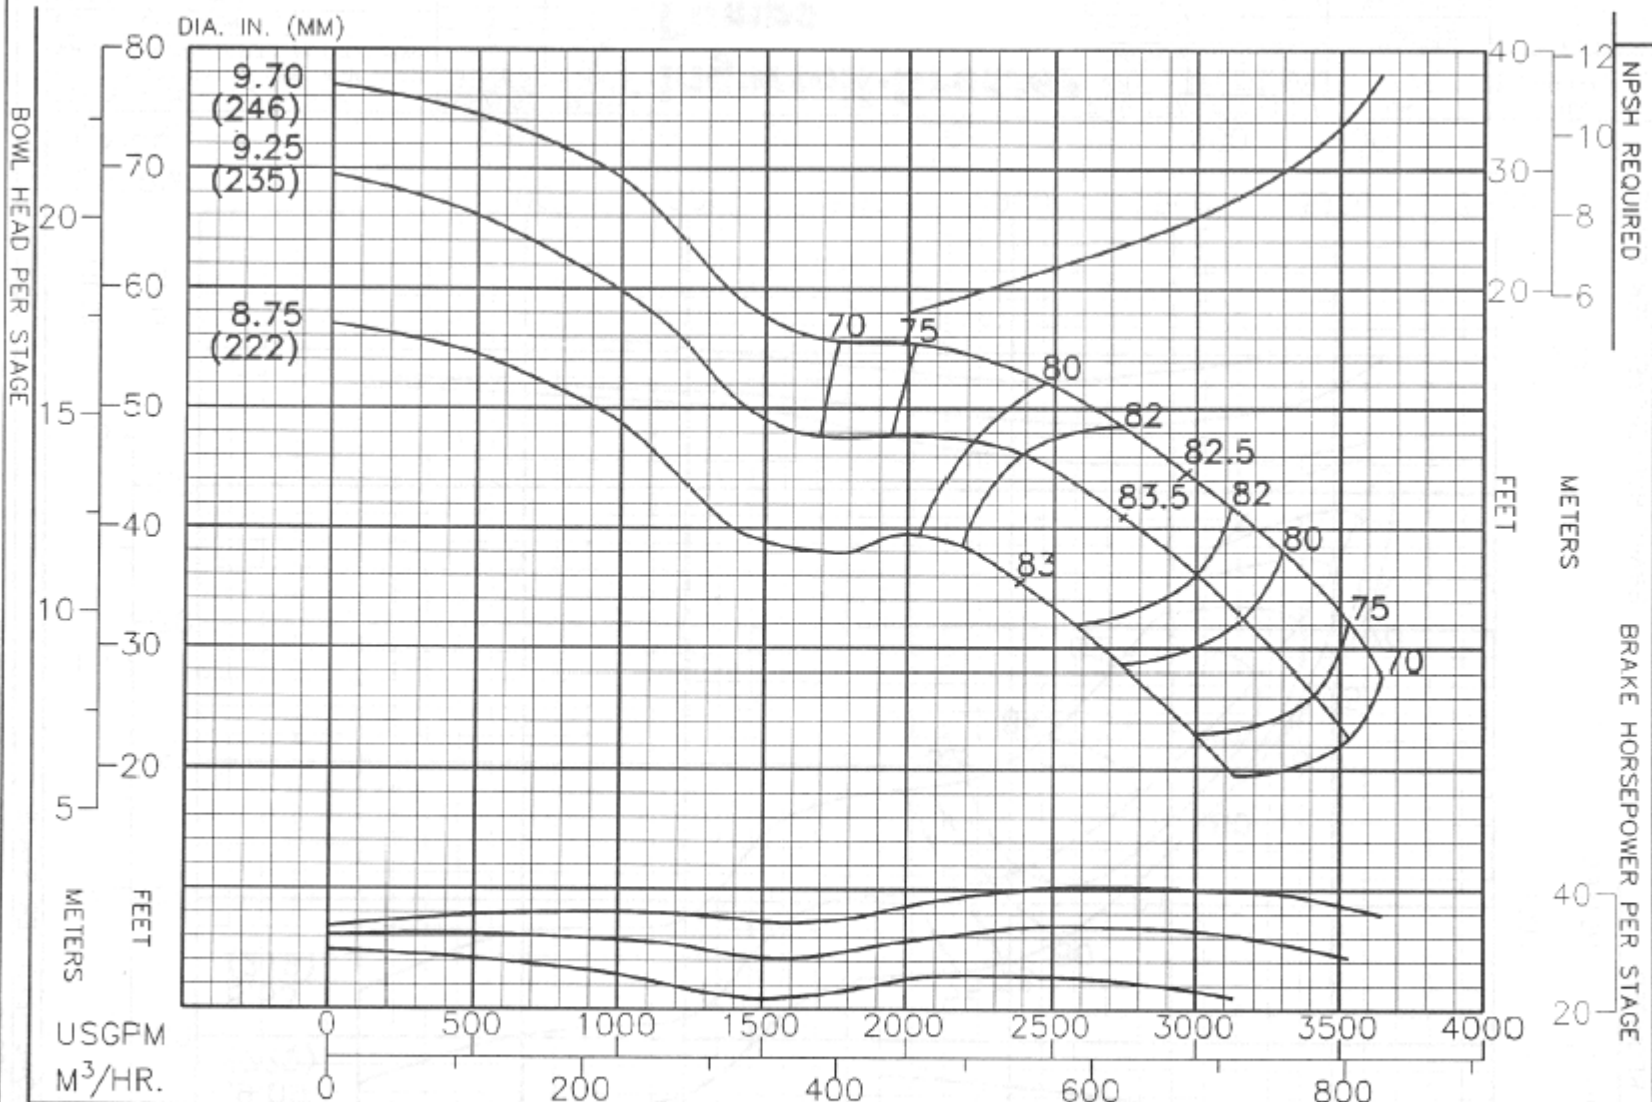

PERFORMANCE BASED ON PUMPING CLEAR WATER BELOW 85°F. WITH LISTED MATLS. COLUMN LOSSES NOT INCLUDED.	
BOWL - CAST IRON - LINE	
IMPELLER - BRONZE	

CHANGE STAGES	IN EFF. POINTS
1	-3
2	-1
3	0

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	
IMPELLER LBS/FT	KG/M
STANDARD 14.0	20.9
BALANCED ---	---
EYE AREA-37.8 SQ. IN.	

RPM	1770
ENCLOSED IMPELLER	
N _s = 5590	

PUMP	12QKH
CURVE NO.	EC-1847