


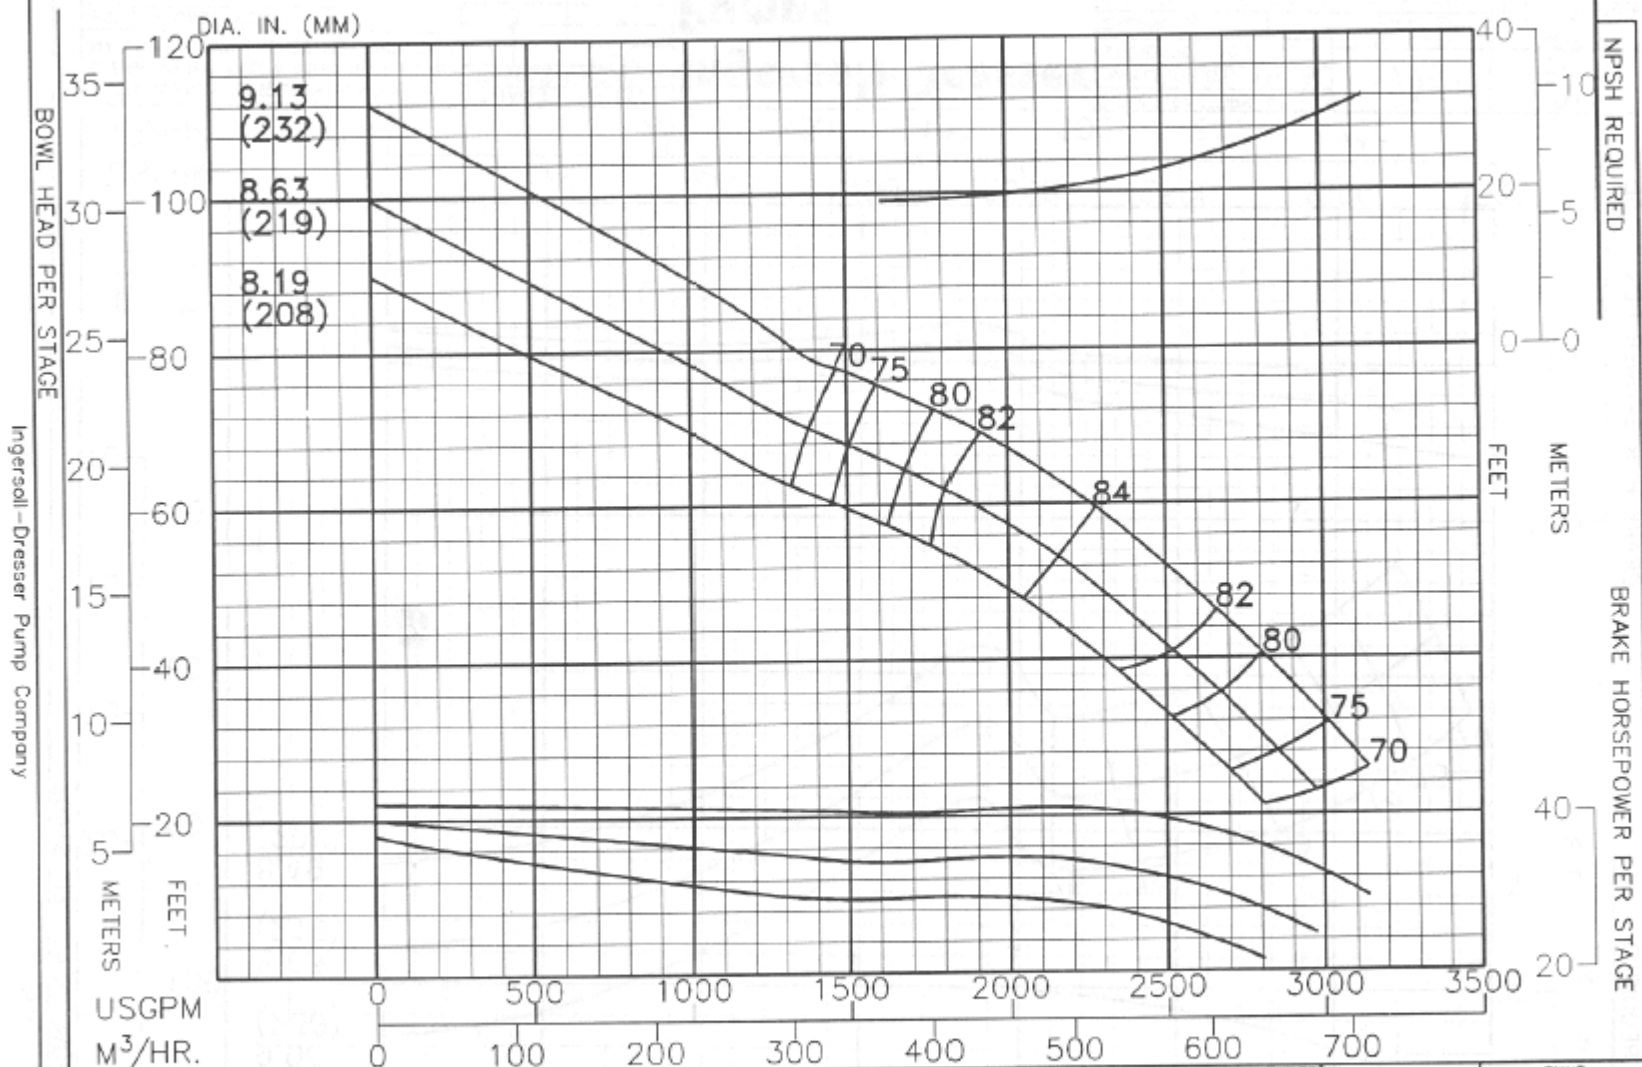

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON	CHANGE IN EFF.
IMPELLER - BRONZE	STAGES POINTS
	1 -2
	2 -1
	3 0

**Ingersoll-Dresser
Pumps**

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	34.0 50.7
BALANCED	--- ---
EYE AREA-43.4 SQ. IN.	

RPM	1775
SEMIOPEN IMPELLER	
N _s	3960

PUMP	14DM
CURVE NO.	EC-1898