


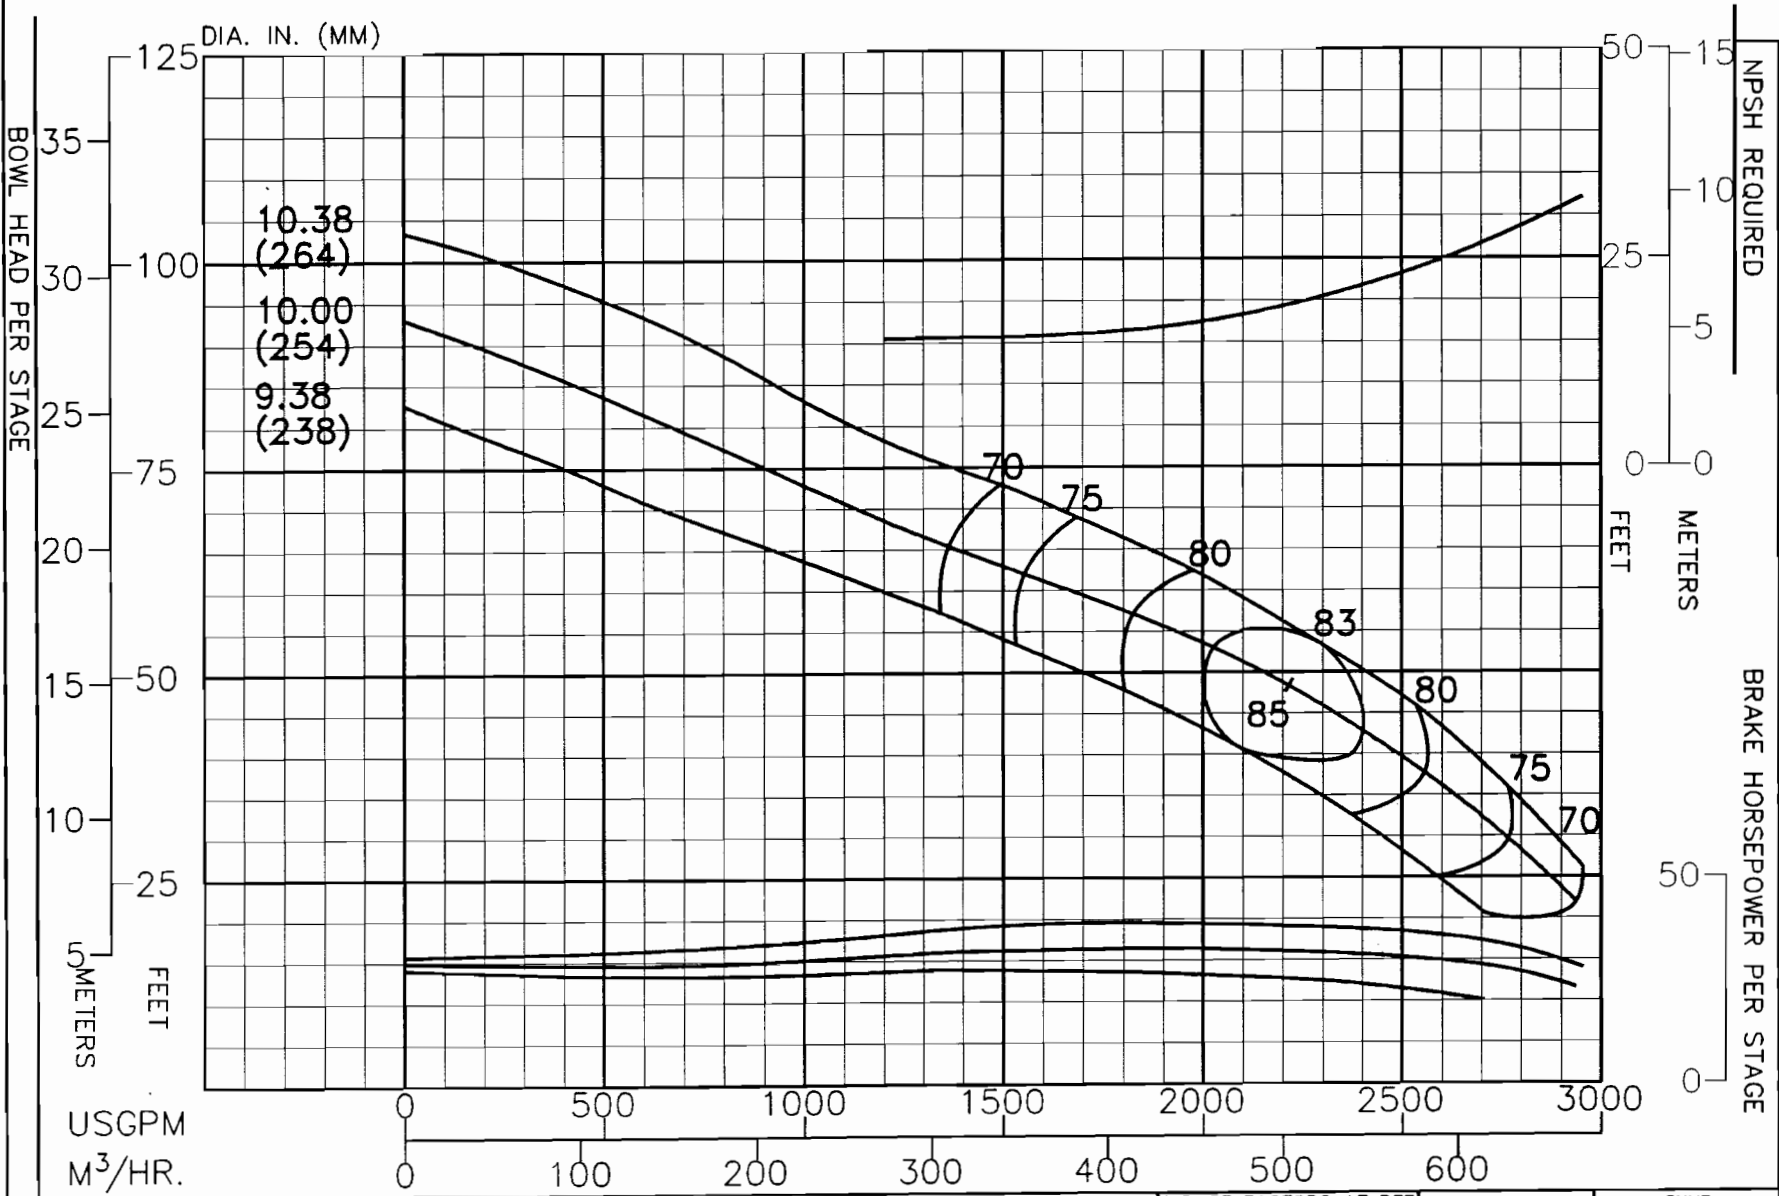

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE	IN EFF.
STAGES	POINTS
1	-1
2	-1
3	-1

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	15.6 23.2
BALANCED	--- ---
EYE AREA- 44.2 SQ. IN.	

RPM
1775
ENCLOSED IMPELLER
N _s = 4330

PUMP
14HH220
CURVE NO.
EC-2422