


NPSH REQUIRED

BRAKE HORSEPOWER PER STAGE

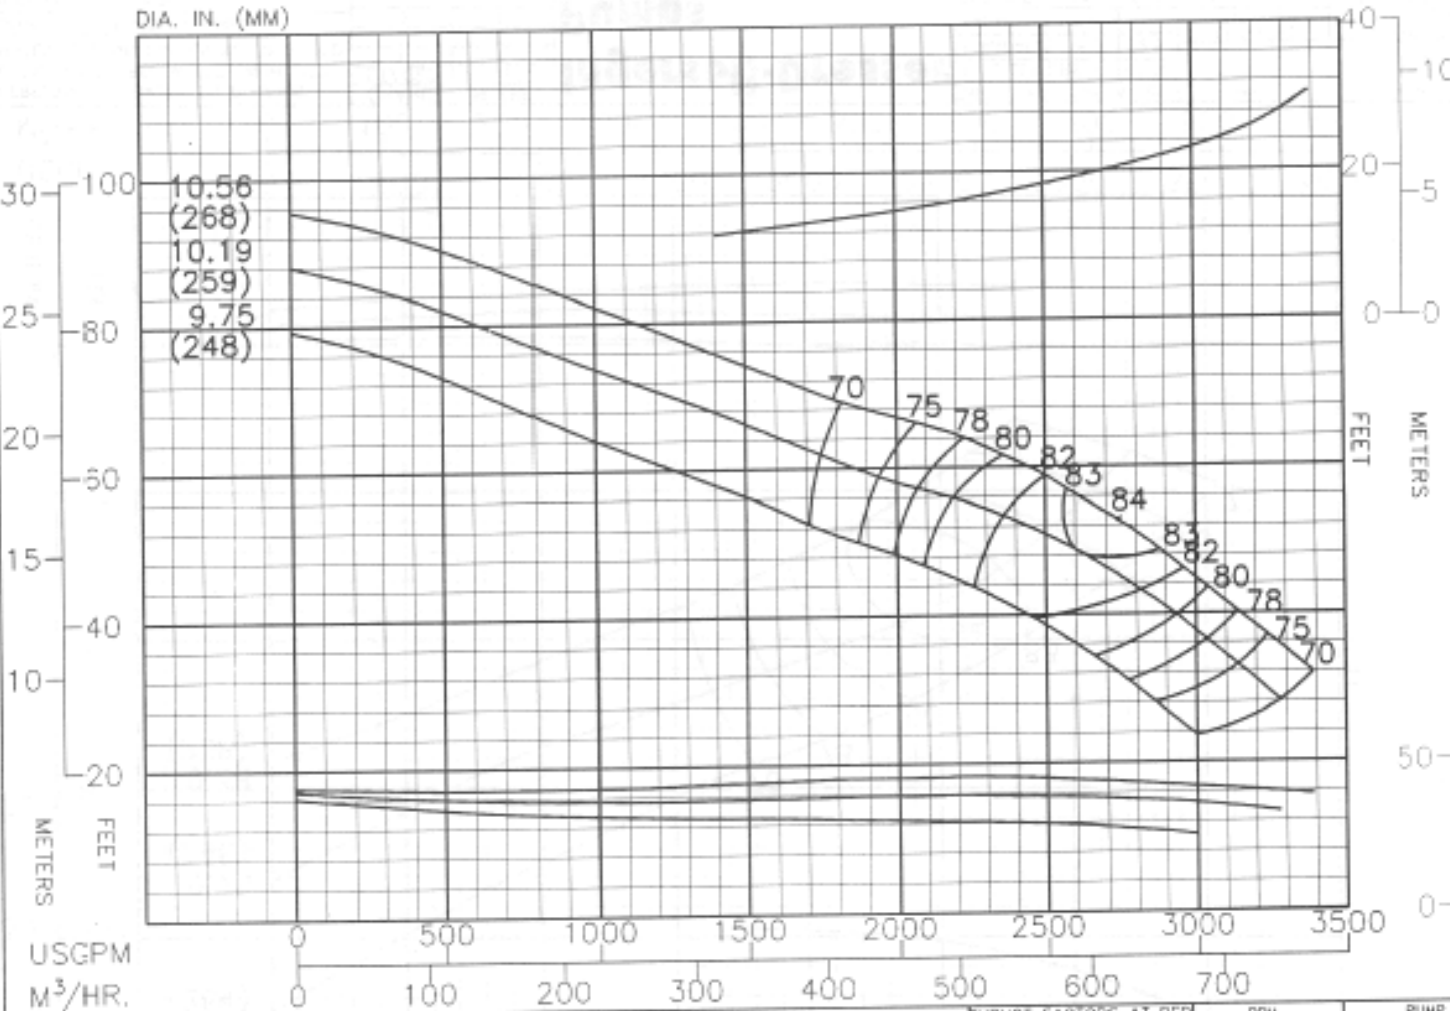

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-3
2	-1.5
3	-1
4	0

Ingersoll-Dresser Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	16.4 24.4
BALANCED	---
EYE AREA	44.8 SQ. IN.

RPM	1775
ENCLOSED IMPELLER	N _s = 4750

PUMP	14HH250
CURVE NO.	EC-2424