


NPSH REQUIRED

BRAKE HORSEPOWER PER STAGE

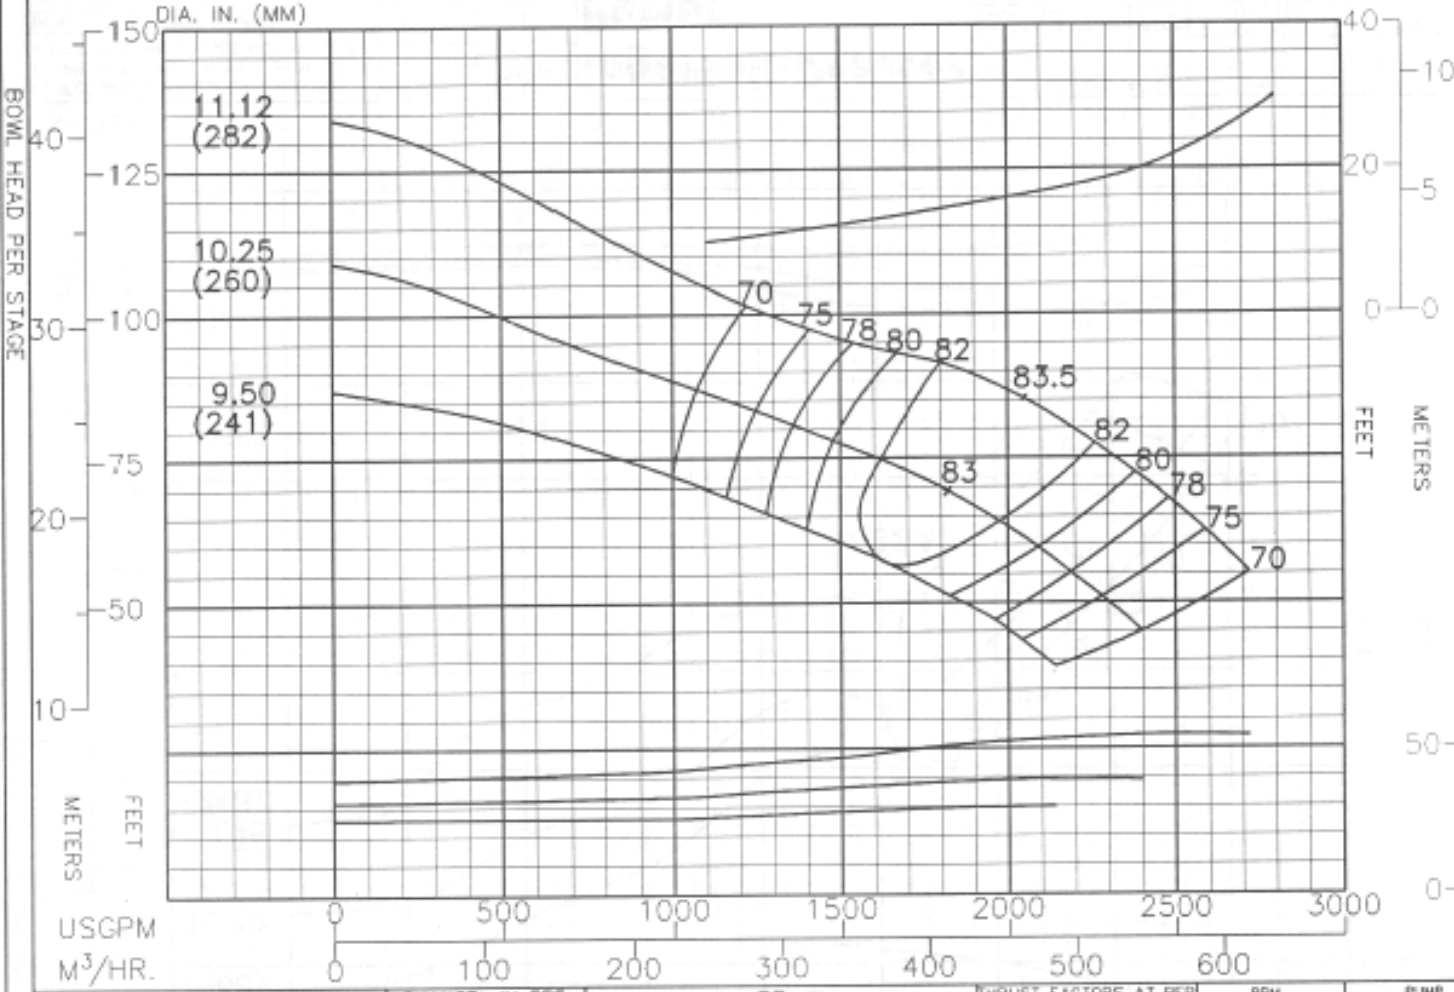

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-3
2	-2
3	-1
4	0

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	
IMPELLER LBS./FT.	KG/M
STANDARD 12.5	18.6
BALANCED 8.6	9.8
EYE AREA-32.7 SQ. IN.	

RPM	1775
ENCLOSED IMPELLER	
N _s =	2870

PUMP	14LKH
CURVE NO.	EC-2241