


NPSH REQUIRED

BRAKE HORSEPOWER PER STAGE

FEET
METERS

50
0

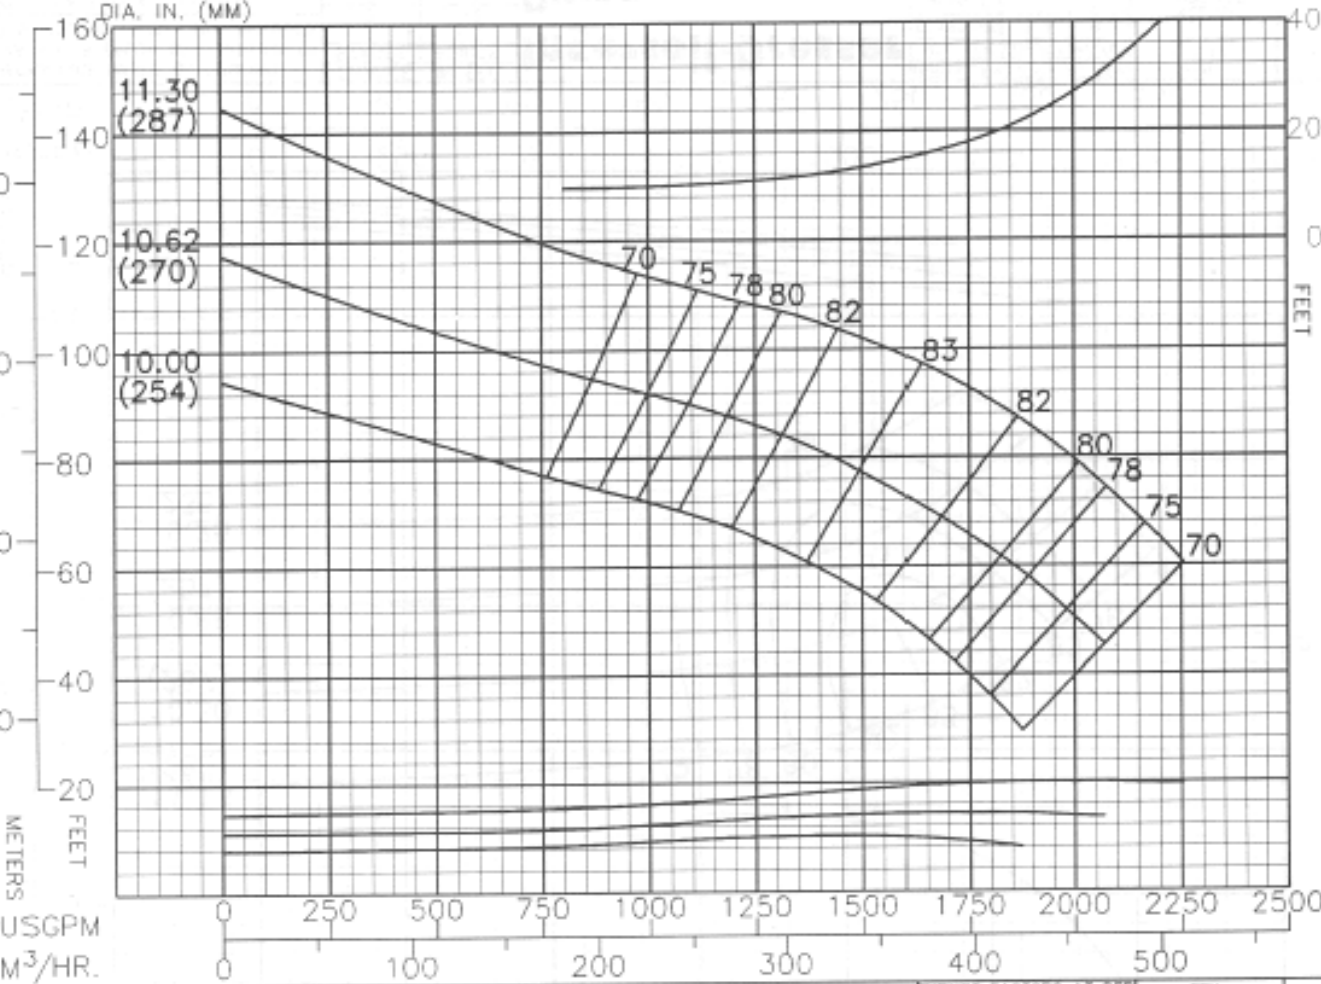

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED

BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-3
2	-2
3	0

Ingersoll-Dresser Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	9.19 13.7
BALANCED	--- ---
EYE AREA	25.3 SQ. IN.

RPM
1775
ENCLOSED IMPELLER
N _s = 2320

PUMP
14M135
CURVE NO.
EC-2373