


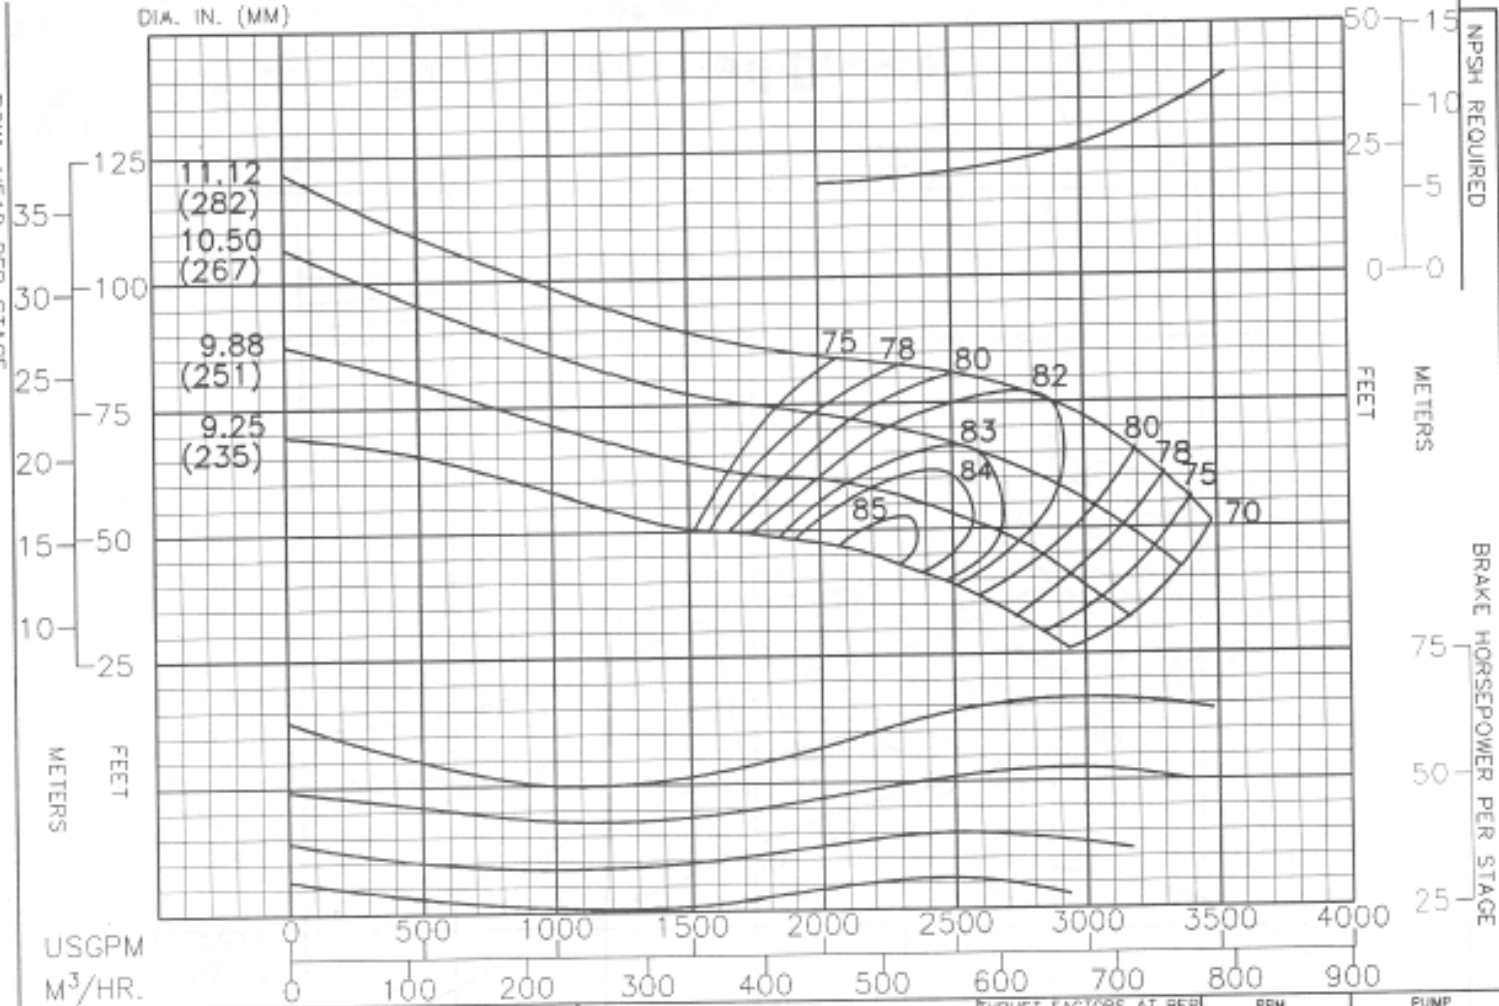

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATERIALS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-2
2	-1
3	0

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS./FT. KG./M
STANDARD	13.4 20.0
BALANCED	9.8 14.6
EYE AREA - 36.5 SQ. IN.	

RPM
1775
ENCLOSED IMPELLER
N _s = 3700

PUMP
14NKH
CURVE NO.
EC-1354