


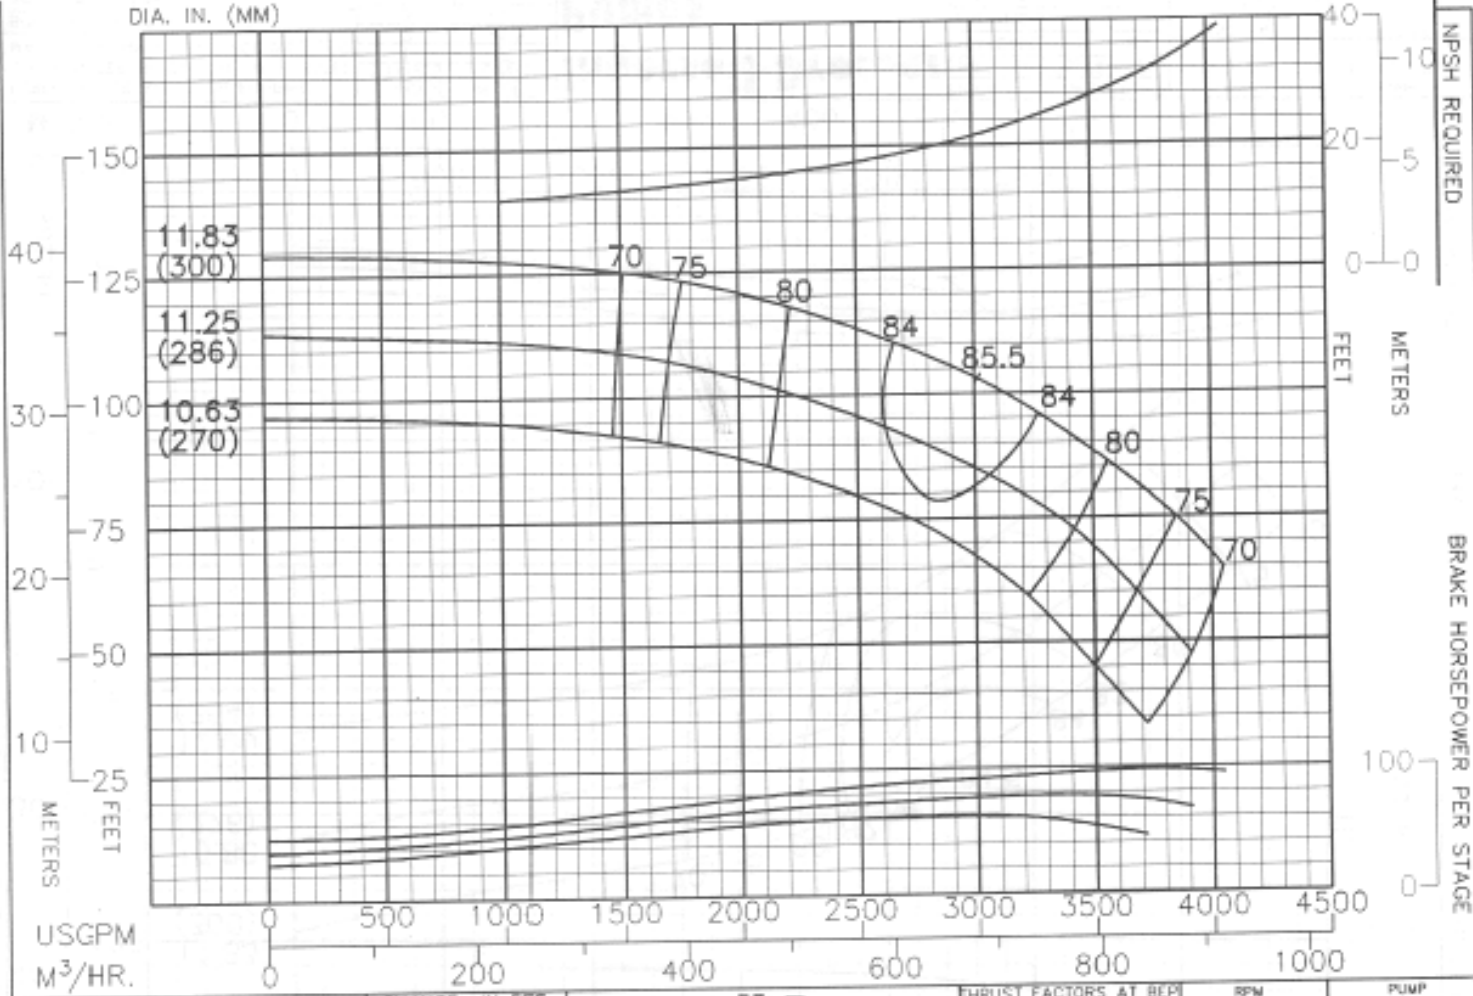

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-3
2	-1.5
3	-1

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BHP	
IMPELLER LBS./FT.	KG/M
STANDARD 12.0	17.9
BALANCED ---	---
EYE AREA - 34.4 SQ. IN.	

RPM
1775
ENCLOSED IMPELLER
N _s = 3020

PUMP
15H277
CURVE NO.
EC-2392