


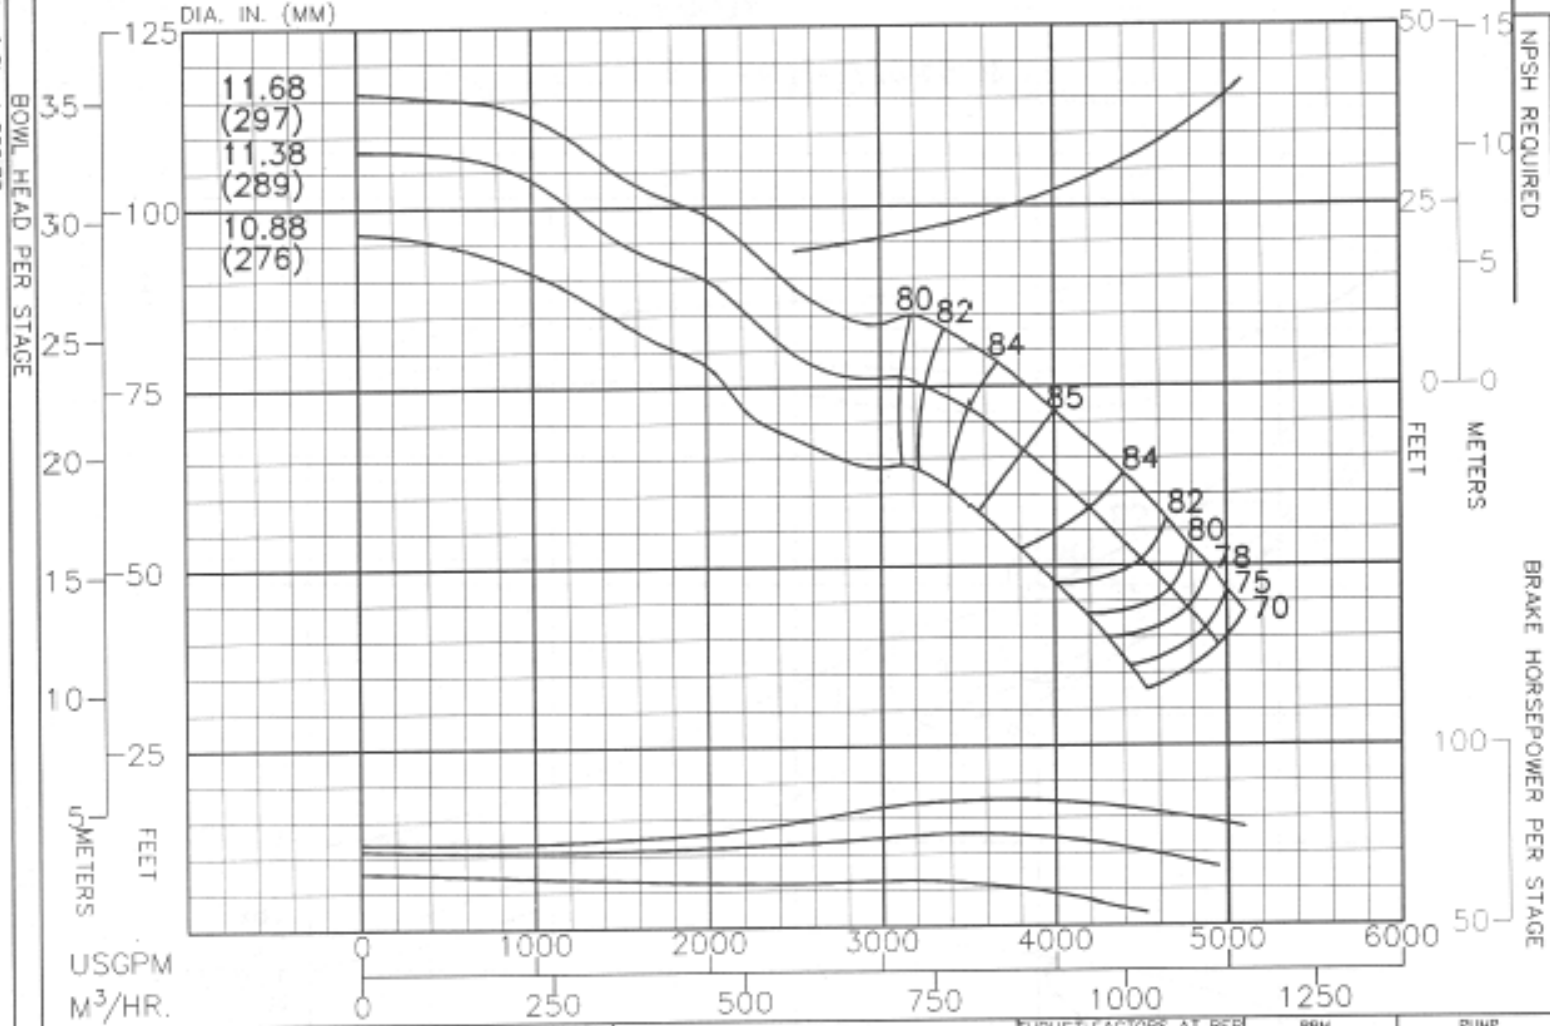

PERFORMANCE BASED ON PUMPING  
CLEAR WATER BELOW 85°F. WITH LISTED  
MATLS. COLUMN LOSSES NOT INCLUDED

BOWL - CAST IRON - LINED  
IMPELLER - BRONZE

| CHANGE<br>STAGES | IN EFF.<br>POINTS |
|------------------|-------------------|
| 1                | -3                |
| 2                | -1.5              |
| 3                | -1                |
| 4                | 0                 |

**Ingersoll-Dresser  
Pumps**

| THRUST FACTORS AT BEP   |          |        |
|-------------------------|----------|--------|
| IMPELLER                | LBS./FT. | KG./M. |
| STANDARD                | 18.2     | 27.1   |
| BALANCED                | ---      | ---    |
| EYE AREA - 53.6 SQ. IN. |          |        |

RPM  
1775  
ENCLOSED  
IMPELLER  
N<sub>s</sub> = 4570

PUMP  
15HH410  
CURVE NO.  
EC-2432