


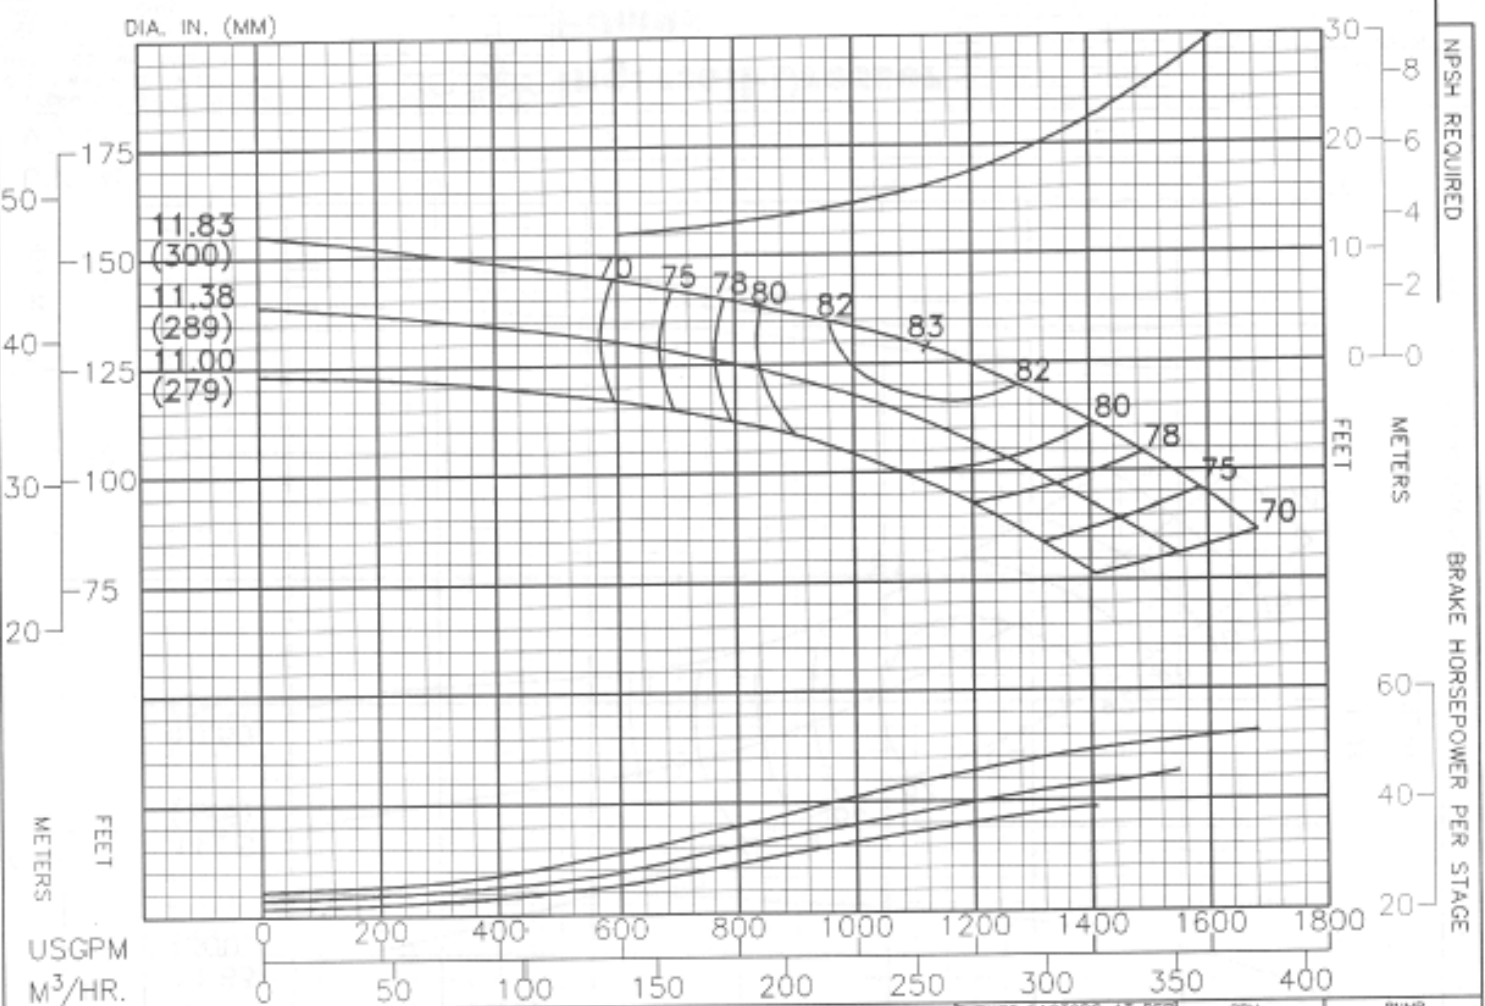

PERFORMANCE BASED ON PUMPING CLEAR WATER BELOW 85°F. WITH LISTED MATS. COLUMN LOSSES NOT INCLUDED BOWL - CAST IRON - LINED IMPELLER - BRONZE	CHANGE STAGES	IN EFF. POINTS	Ingersoll-Dresser Pumps	THRUST FACTORS AT BEP		RPM 1775	PUMP 15L110
	1	-3		IMPELLER LBS/FT ² KG/M ²			
	2	-1.5		STANDARD 4.97 7.41	ENCLOSED IMPELLER		
	3	-1		BALANCED --- ---			
				EYE AREA-19.0 SQ. IN.		N _s = 1560	CURVE NO. EC-2408