


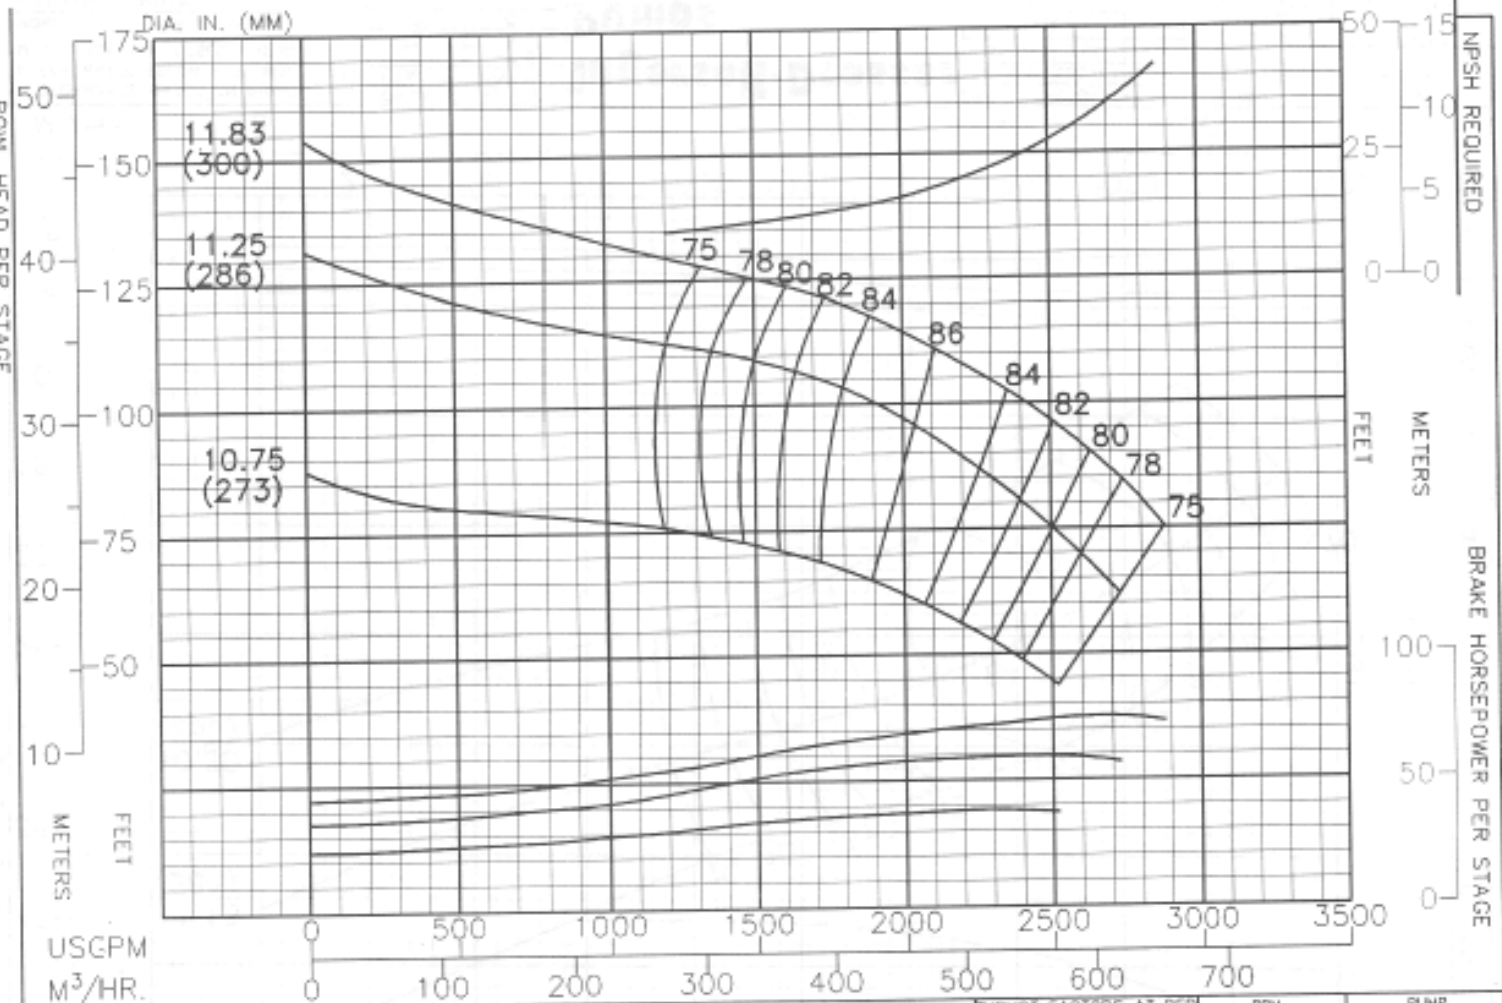

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-1.5
2	-1
3	0

Ingersoll-Dresser Pumps

THRUST FACTORS AT BEP	
IMPELLER	LB/FT KG/M
STANDARD	8.57 12.8
BALANCED	--- ---
EYE AREA- 26.9 SQ. IN.	

RPM
1775
ENCLOSED IMPELLER
N _s = 2380

PUMP
15M185
CURVE NO.
EC-2377