


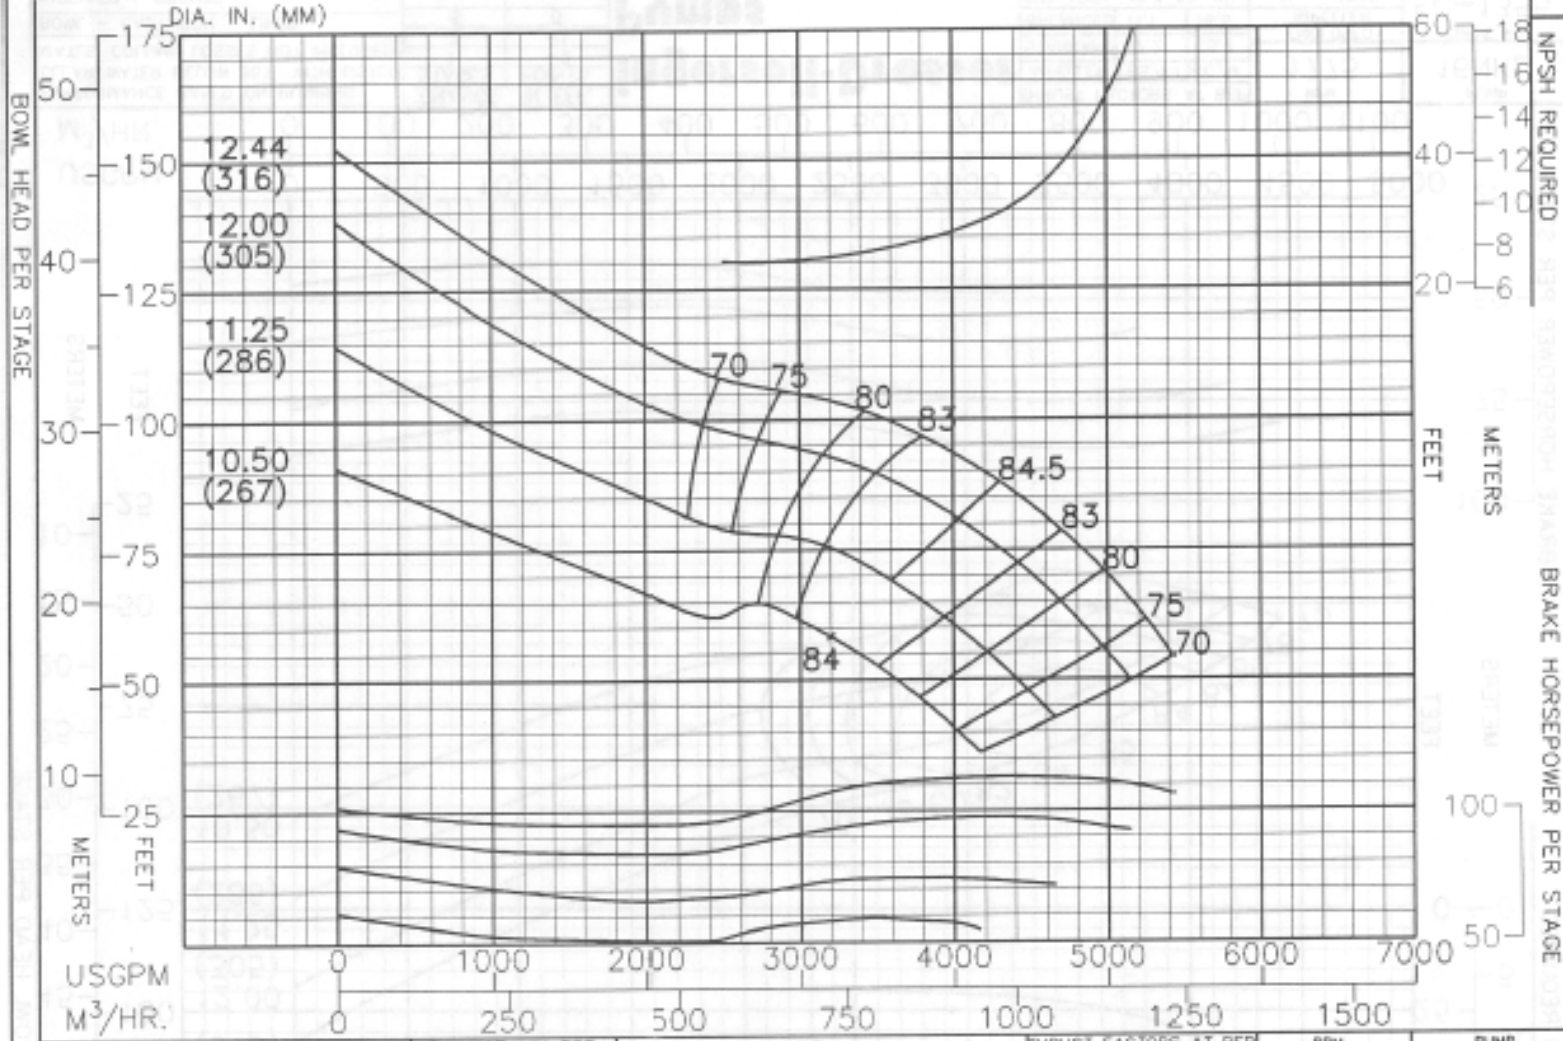

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATERIALS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-2
2	-1
3	0

**Ingersoll-Dresser
Pumps**

THRUST FACTORS AT BEP	
IMPELLER LBS./FT.	KG/M
STANDARD	16.4 24.5
BALANCED	11.1 16.5
EYE AREA-46.3 SQ. IN.	

RPM	PUMP
1775	16NKH
ENCLOSED IMPELLER	
N _s = 4050	

CURVE NO.
EC-1822