


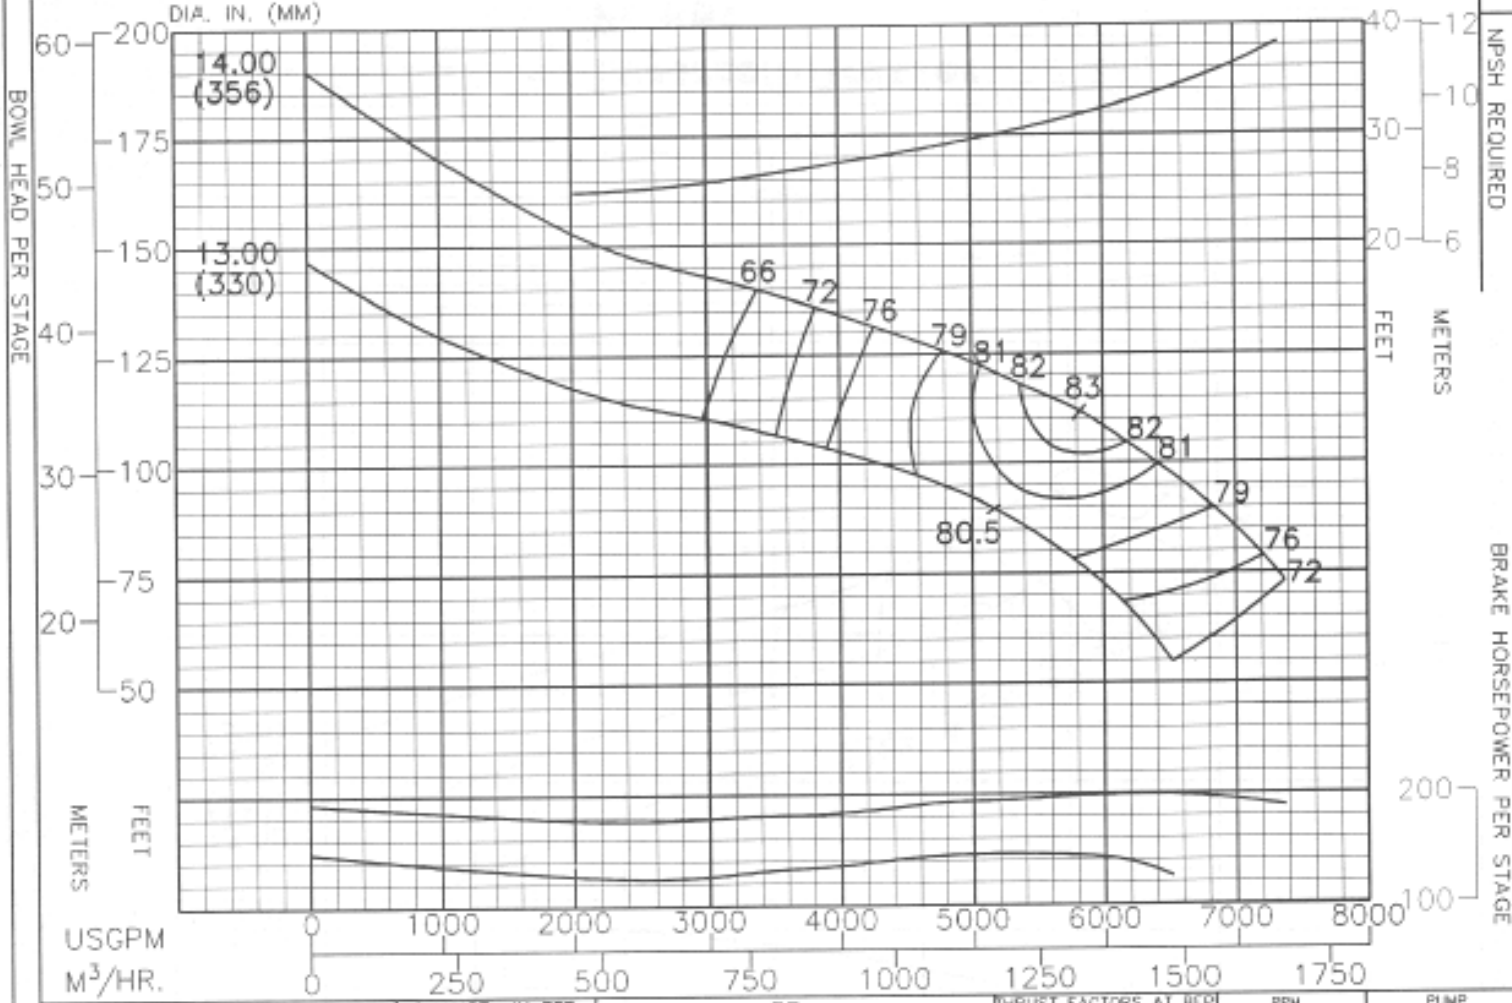

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON
IMPELLER - BRONZE

CHANGE STAGES	IN EFF POINTS
1	-3
2	-1.5
3	-1

Ingersoll-Dresser **Pumps**

THRUST FACTORS AT BCP	
IMPELLER	LBS./FT. KG./M.
STANDARD	21.2 31.6
BALANCED	--- ---
EYE AREA- 68.0 SQ. IN.	

RPM
1780
ENCLOSED IMPELLER
N _s = 3960

PUMP
18H600
CURVE NO.
EC-2435