


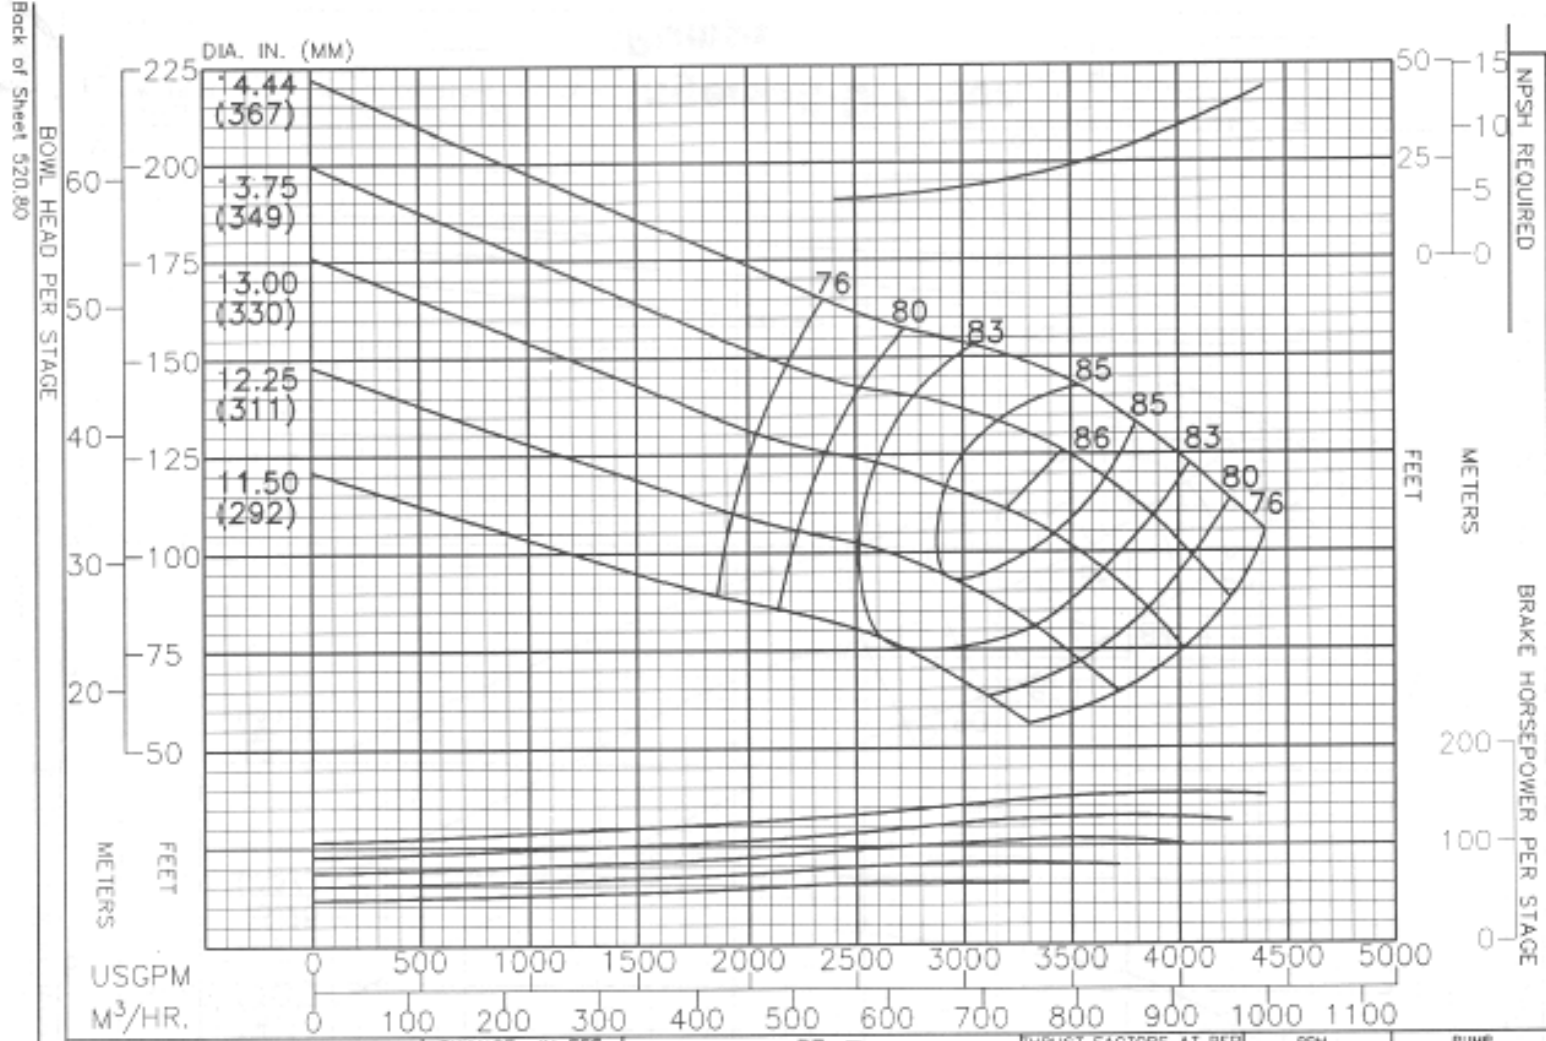

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATERIALS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-2
2	-1
3	0

Ingersoll-Dresser Pumps

IMPELLER FACTORS AT BEP	
IMPELLER LBS/FT	KG/M
STANDARD 14.6	21.8
BALANCED 5.8	8.7
EYE AREA-47.3 SQ. IN.	

RPM	1780
ENCLOSED IMPELLER	
N _s = 2680	

PUMP	18KKH
CURVE NO.	EC-1448