


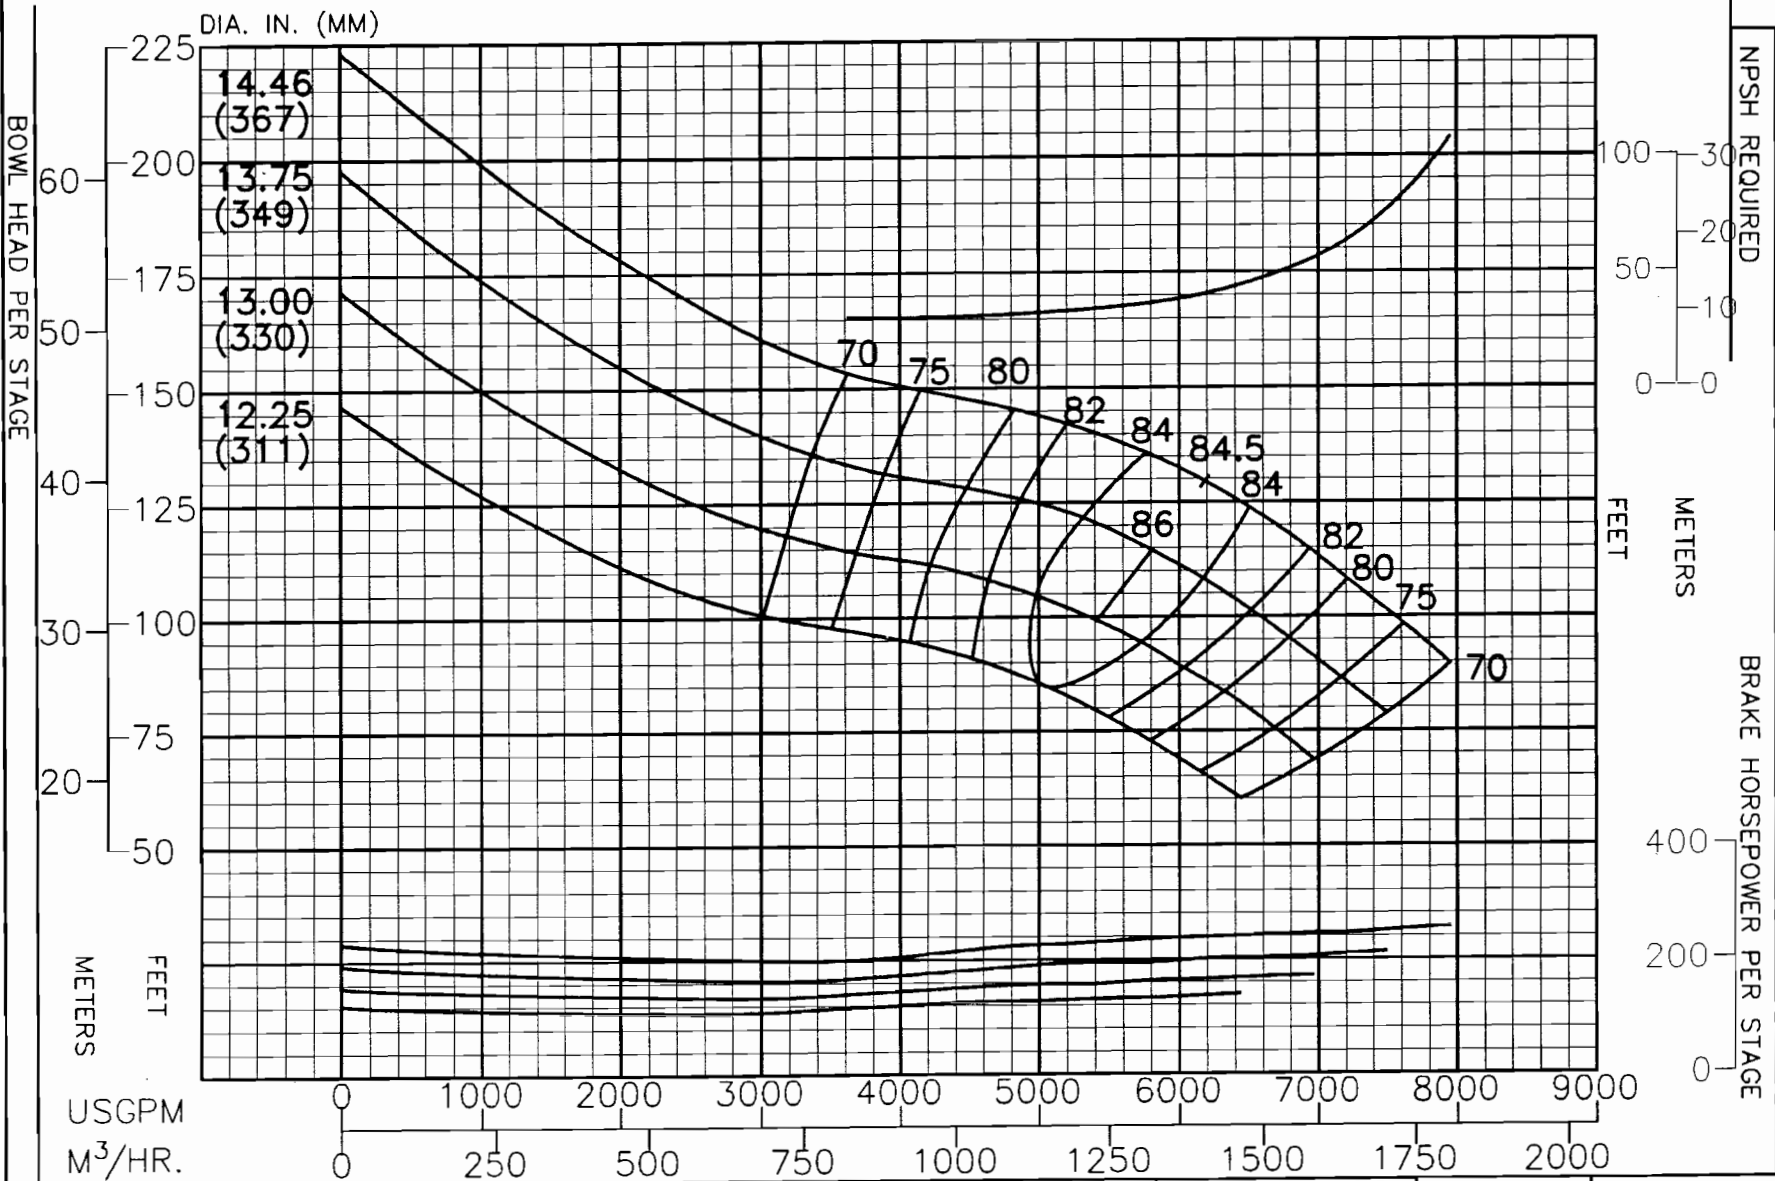

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED

IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-1
2	0

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP		
IMPELLER	LBS/FT	KG/M
STANDARD	22.1	32.9
BALANCED	15.7	23.4
EYE AREA-62.4 SQ. IN.		

RPM
1780
ENCLOSED IMPELLER
N _s = 3640

PUMP
18NKH
CURVE NO.
EC-1457