


BOWL HEAD PER STAGE

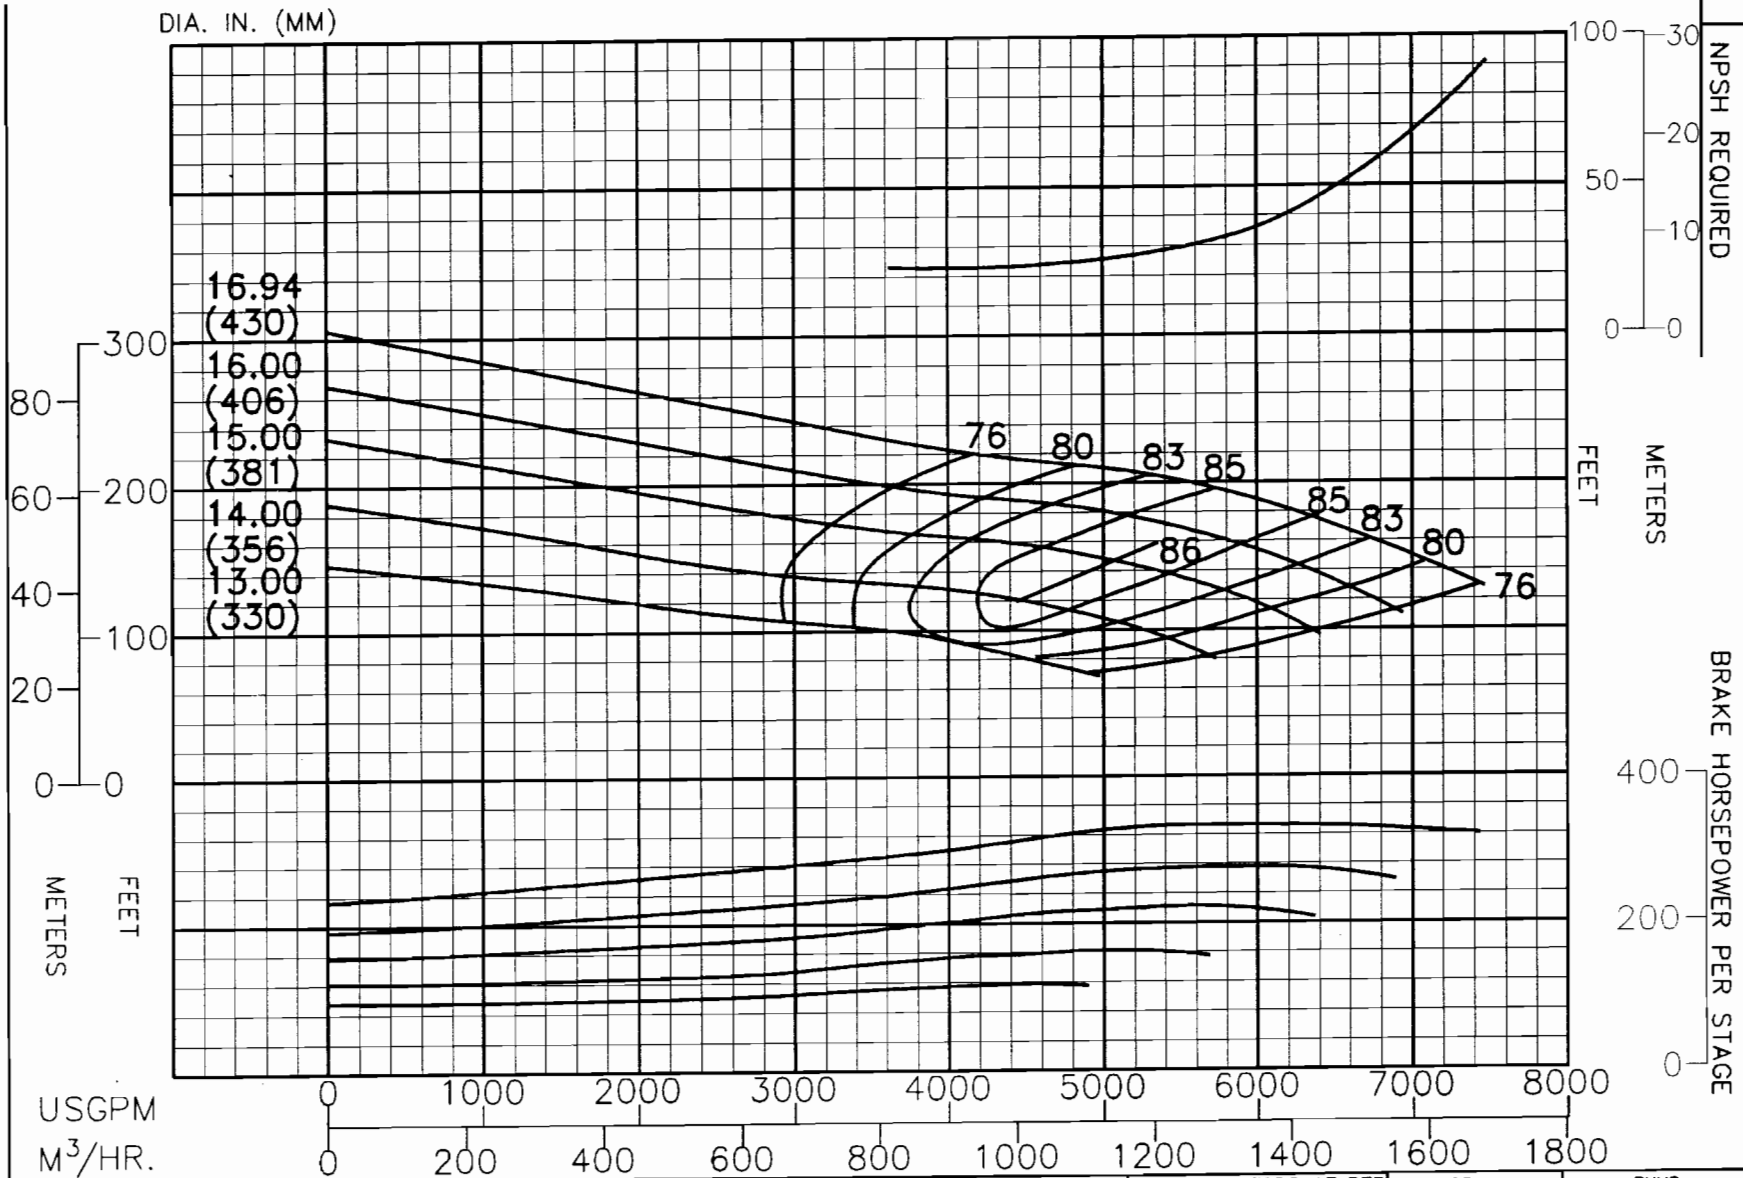

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED

IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-2
2	-1
3	0

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	19.7 29.3
BALANCED	10.0 14.9
EYE AREA-60.5 SQ. IN.	

RPM	1780
ENCLOSED IMPELLER	
N _s = 2740	

PUMP	20KKH
CURVE NO.	EC-1363