


NPSH REQUIRED

BRAKE HORSEPOWER PER STAGE

10 5 0 0 1.0 0.5 0.0
3 2 1 0 1.0 0.5 0.0
FEET METERS

DIA. IN. (MM)

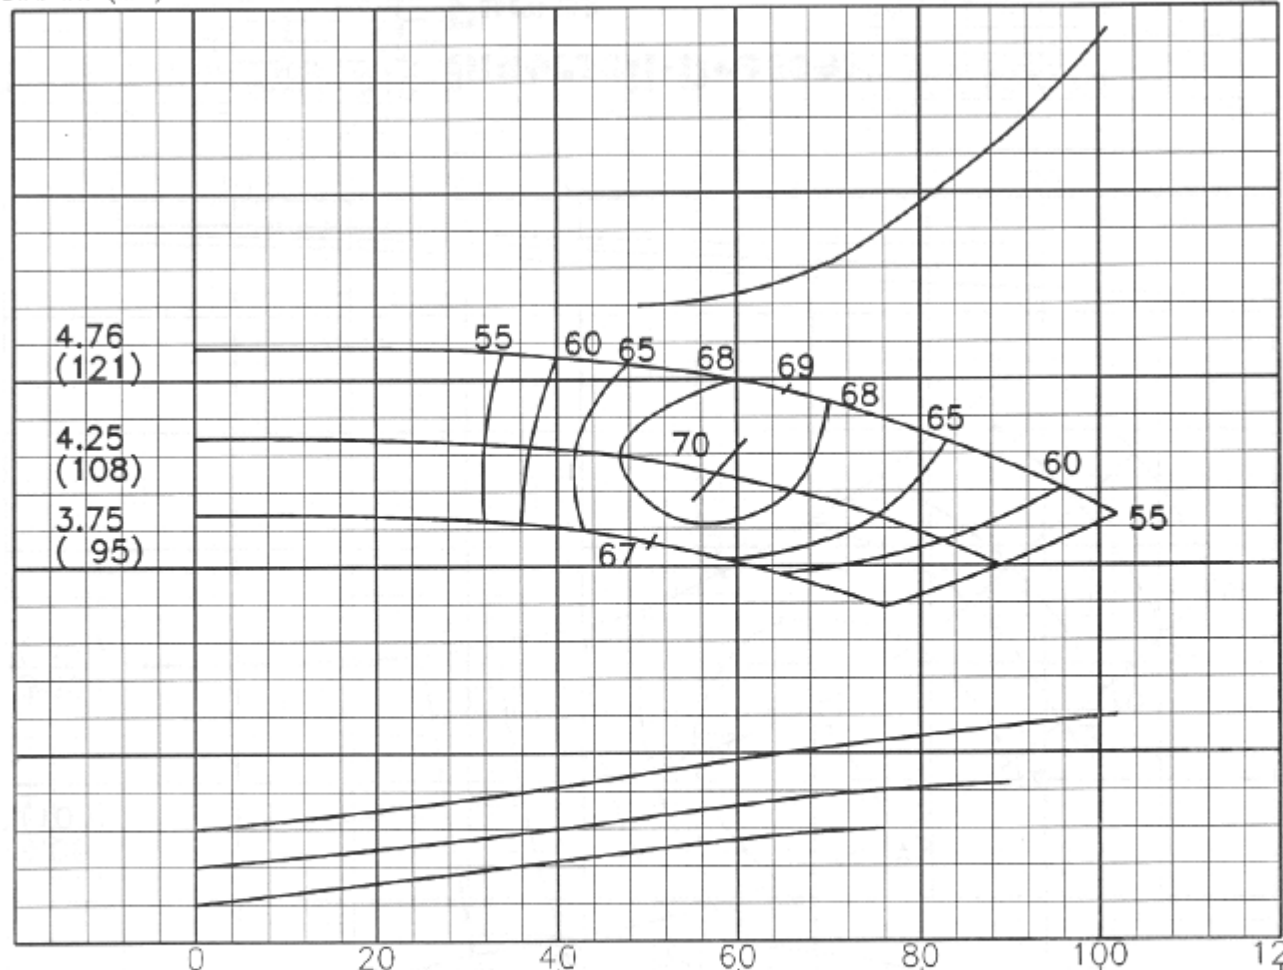

30 8 6 4 0 10
FEET METERS

USGPM
M³/HR.

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.

CHARGE	IN EFF.
STAGES	POINTS
1	-5
2	-3
3	-2
4	-1

BOWL - CAST IRON - LINED
IMPELLER - BRONZE

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP

IMPELLER	LBS/FT	KG/M
STANDARD	1.00	1.49
BALANCED	.30	.45

EYE AREA-2.91 SQ. IN.

RPM
1760

ENCLOSED
IMPELLER

N_s = 1535

PUMP
6JKH

CURVE NO.
EC-1375