


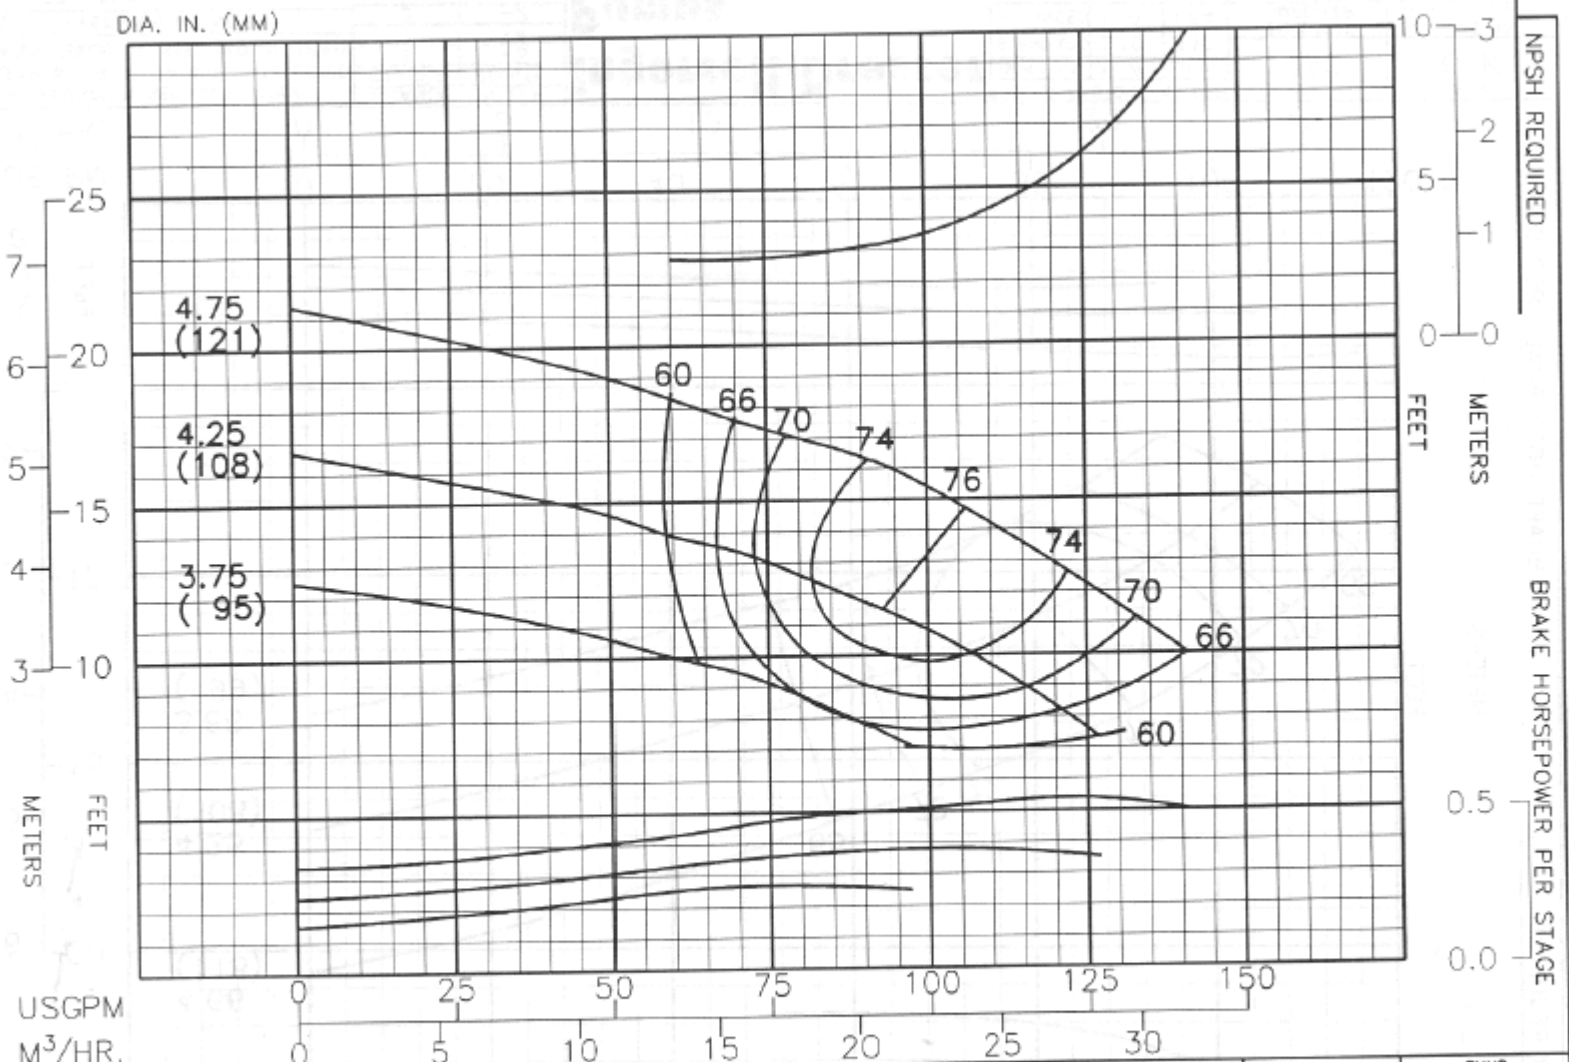

PERFORMANCE BASED ON PUMPING CLEAR WATER BELOW 85°F. WITH LISTED MATLS. COLUMN LOSSES NOT INCLUDED.	CHANGE IN EFF.		Ingersoll-Dresser Pumps	THRUST FACTORS AT BEP		RPM 1760	PUMP 6KKH
	STAGES	POINTS		IMPELLER	LBS/FT KG/M		
	1	-5		STANDARD	1.50 2.24	ENCLOSED IMPELLER N _s = 2410	CURVE NO. EC-1378
	2	-4		BALANCED	1.10 1.64		
	3	-3		EYE AREA-4.3 SQ. IN.			
BOWL - CAST IRON - LINED	5	-1					
IMPELLER - BRONZE							