


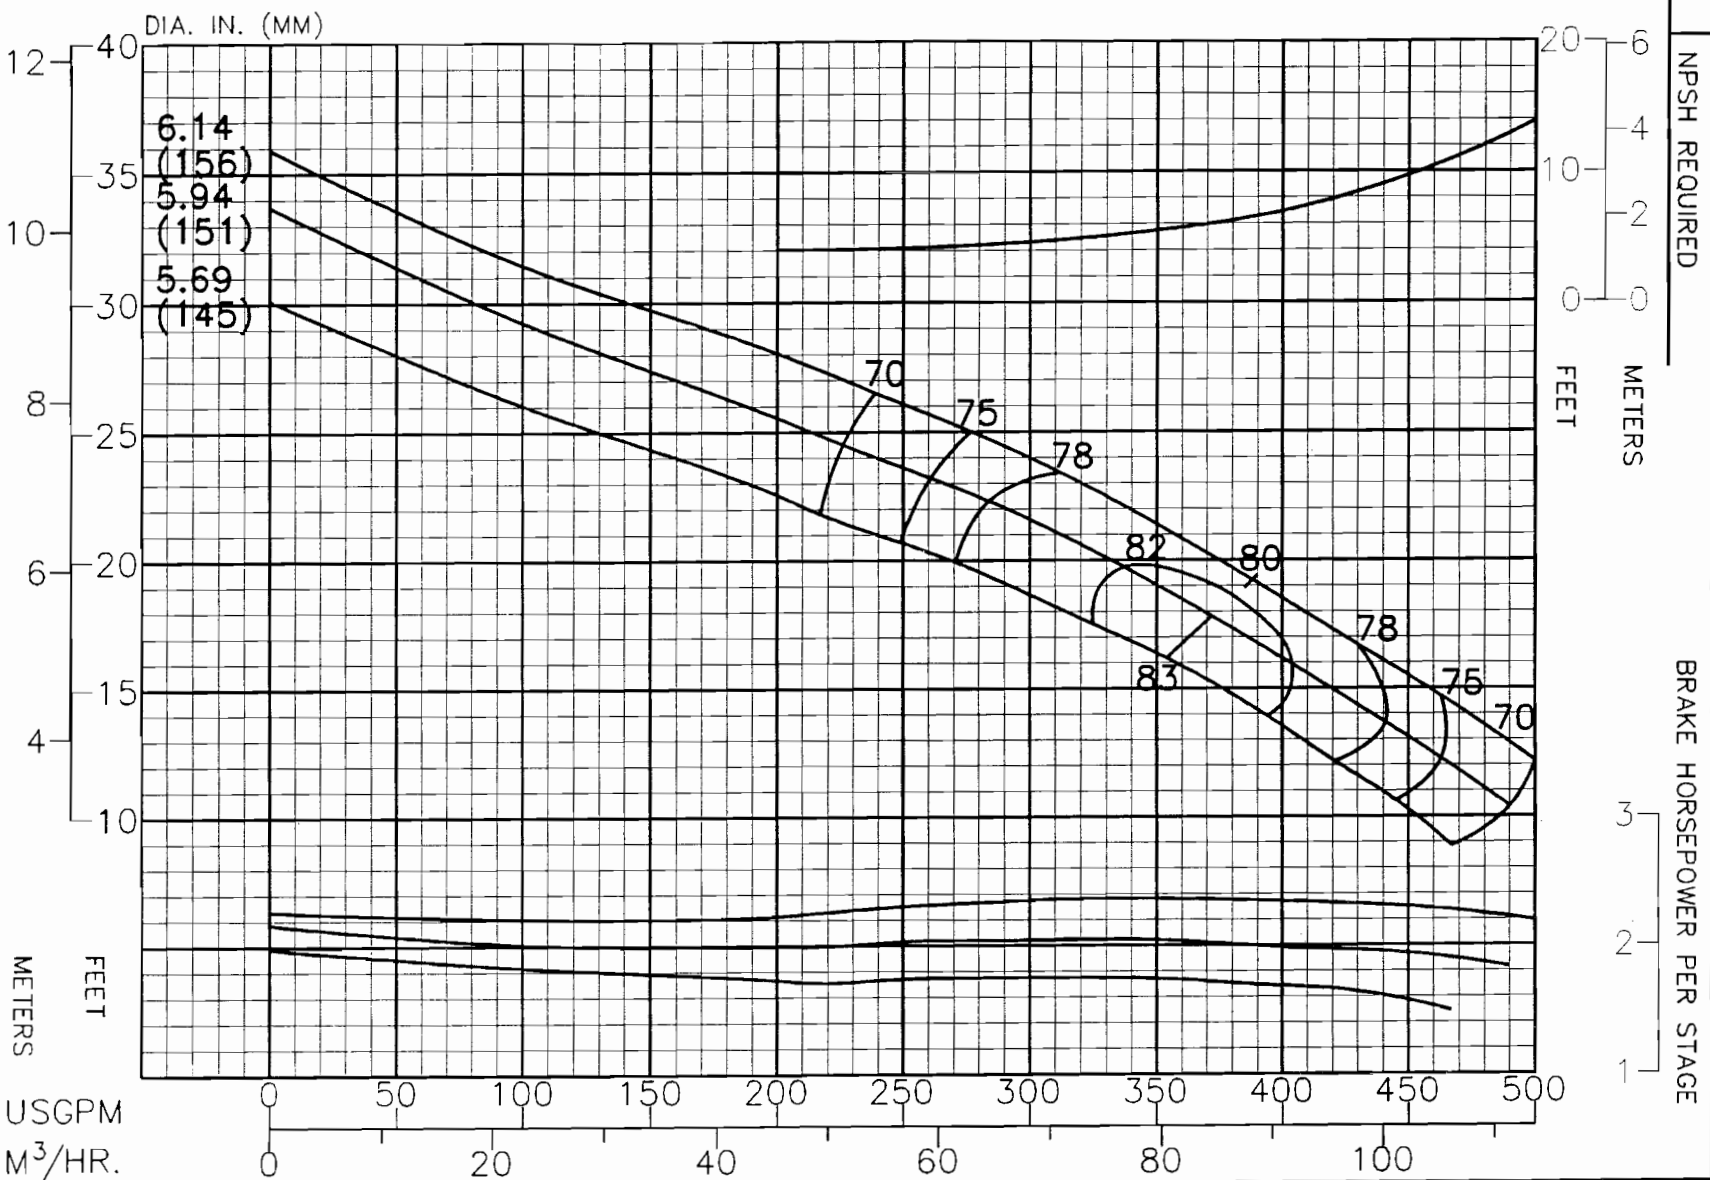

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED

IMPELLER - BRONZE

CHARGE	IN EFF.
STAGES	POINTS
1	-4
2	-2
3	-1

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP		
IMPELLER	LBS/FT	KG/M
STANDARD	4.34	6.47
BALANCED	---	---
EYE AREA-	12.1	SQ. IN.

RPM	1770
ENCLOSED IMPELLER	
N _s =	3800

PUMP	8H38
CURVE NO.	EC-2382