


NPSH REQUIRED

FEET
METERS

BRAKE HORSEPOWER PER STAGE

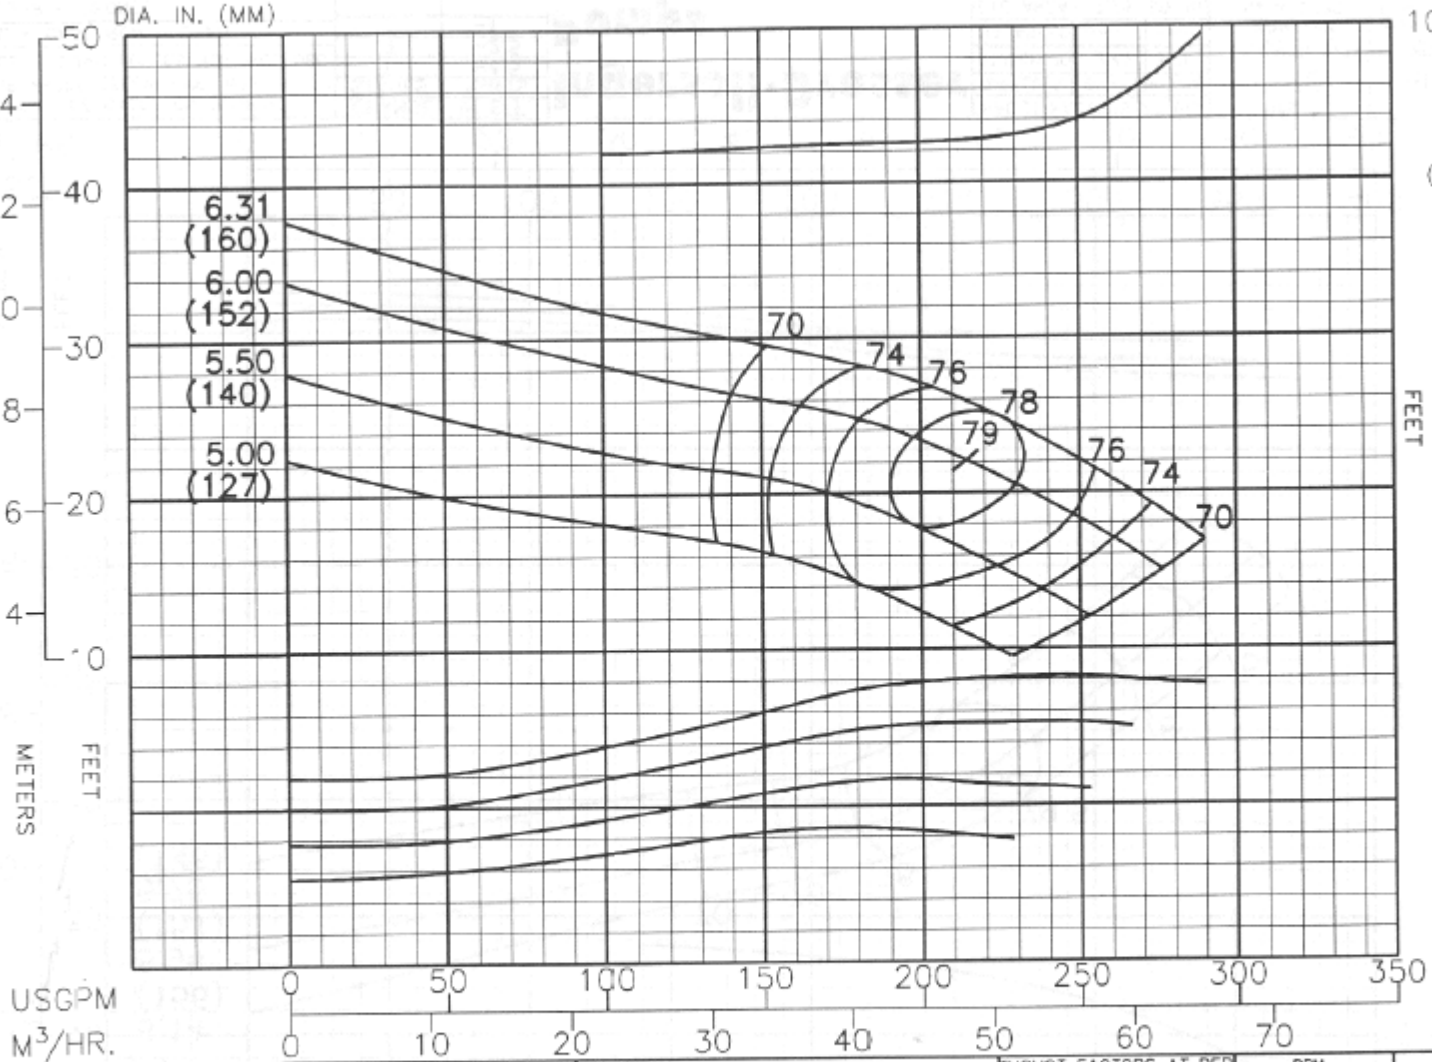

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-3
2	-2
3	-1
4	0

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	3.60 5.36
BALANCED	2.78 4.14
EYE AREA-8.12 SQ. IN.	

RPM	1760
ENCLOSED IMPELLER	
N _s = 2410	

PUMP	8KKL
CURVE NO.	EC-1381