


BOWL HEAD PER STAGE

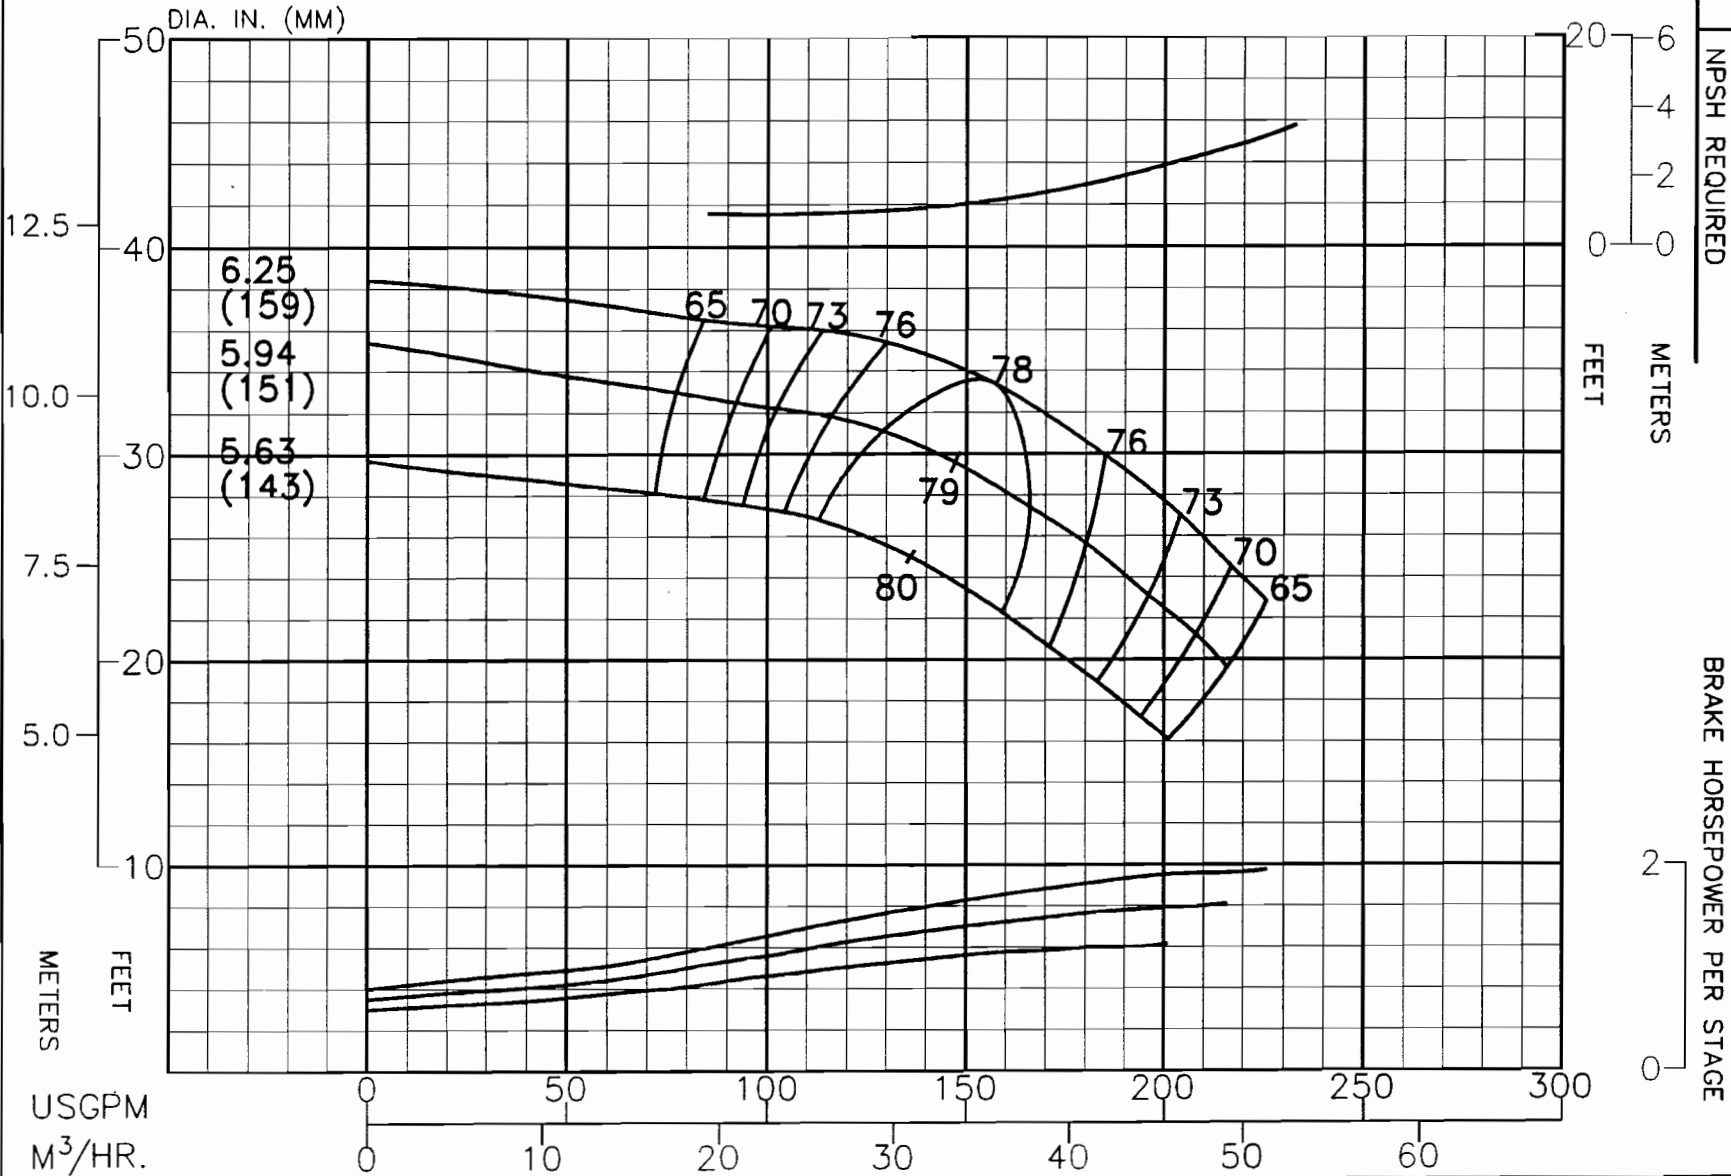

PERFORMANCE BASED ON PUMPING CLEAR WATER BELOW 85°F. WITH LISTED MATLS. COLUMN LOSSES NOT INCLUDED.	CHANGE IN EFF.		Ingersoll-Dresser Pumps	THRUST FACTORS AT BEP		RPM 1770	PUMP 8L15
	STAGES	POINTS		IMPELLER	LBS/FT KG/M		
	1	-4.5		STANDARD	1.30 1.94	ENCLOSED IMPELLER	CURVE NO. EC-2352
	2	-2.5		BALANCED	---		
BOWL - CAST IRON - LINED	3	-1		EYE AREA-	4.71 SQ. IN.	N _s = 1590	
IMPELLER - BRONZE							