


NPSH REQUIRED

BRAKE HORSEPOWER PER STAGE

10 3
5 2
0 1
0 0
FEET METERS

2
1

DIA. IN. (MM)

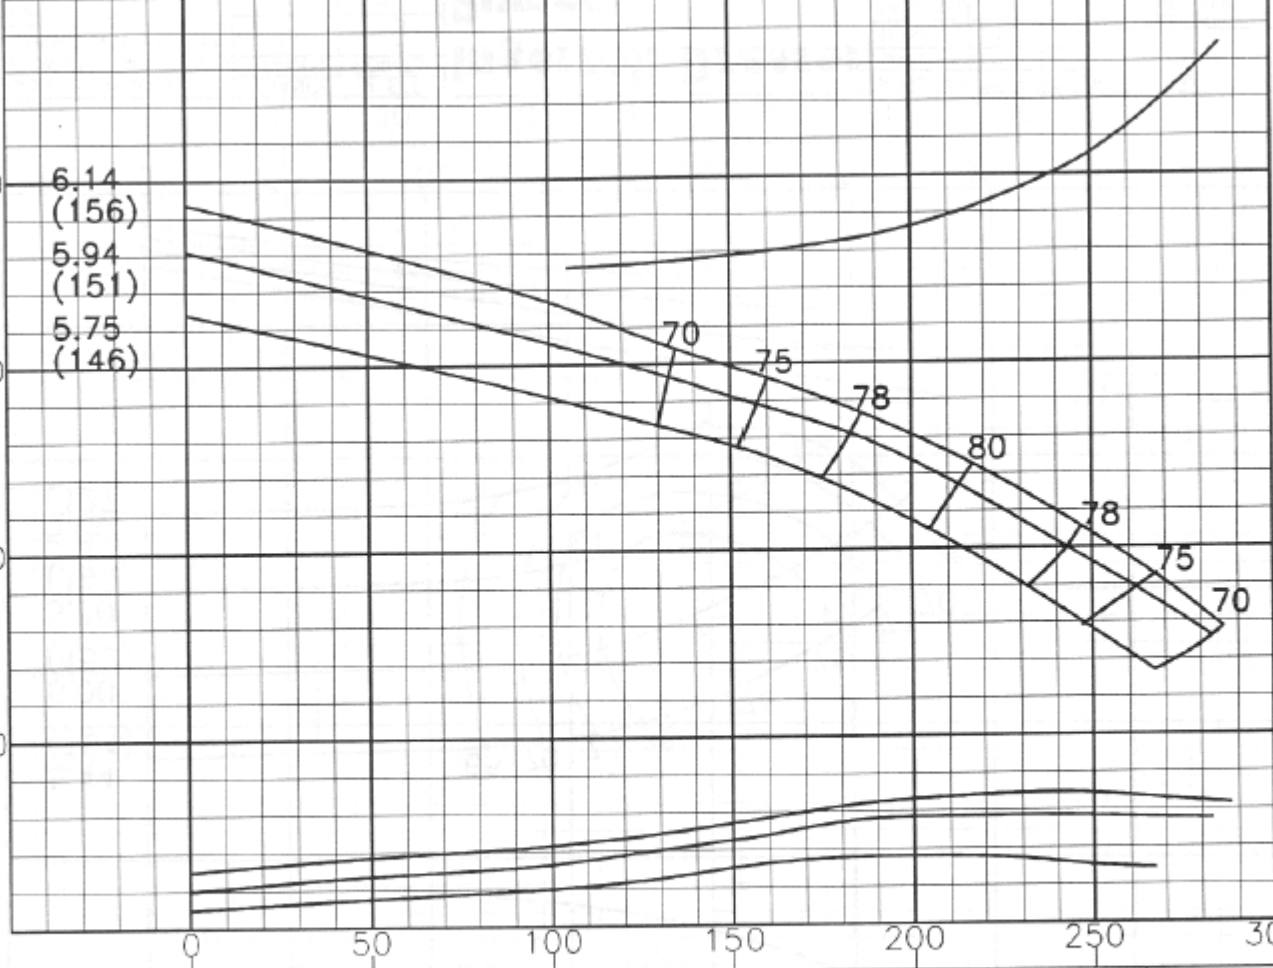

USGPM
M³/HR.

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-4.5
2	-2.5
3	-1

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	2.85 4.25
BALANCED	--- ---
EYE AREA	7.75 SQ. IN.

RPM
1770
ENCLOSED IMPELLER
N _s = 2360

PUMP
8M23
CURVE NO.
EC-2362