


BOWL HEAD PER STAGE

Ingersoll-Dresser Pump Company

PERFORMANCE

NPSH REQUIRED

BRAKE HORSEPOWER PER STAGE

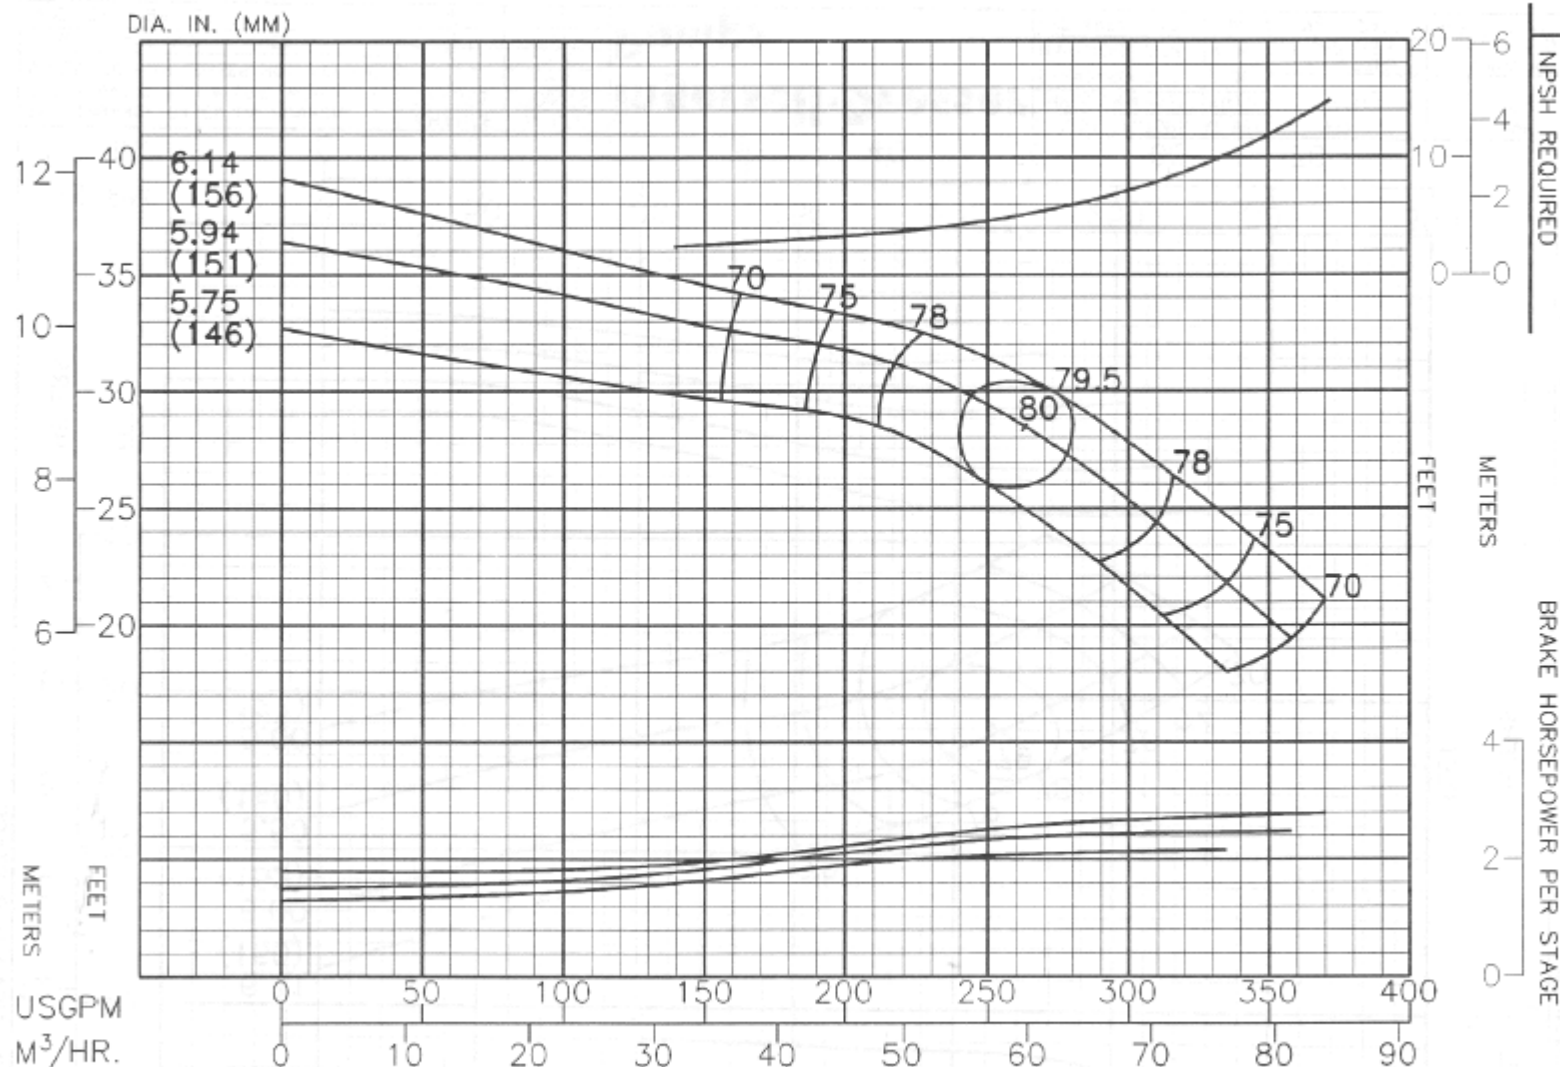

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-4.5
2	-2.5
3	-1

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP		
IMPELLER	LBS/FT	KG/M
STANDARD	2.49	3.71
BALANCED	---	---
EYE AREA- 7.75 SQ. IN.		

RPM
1770
ENCLOSED IMPELLER
N _s = 2270

PUMP
8M28
CURVE NO.
EC-2364