
©1993 Ingersoll-Dresser Pump Company
Printed in U.S.A.

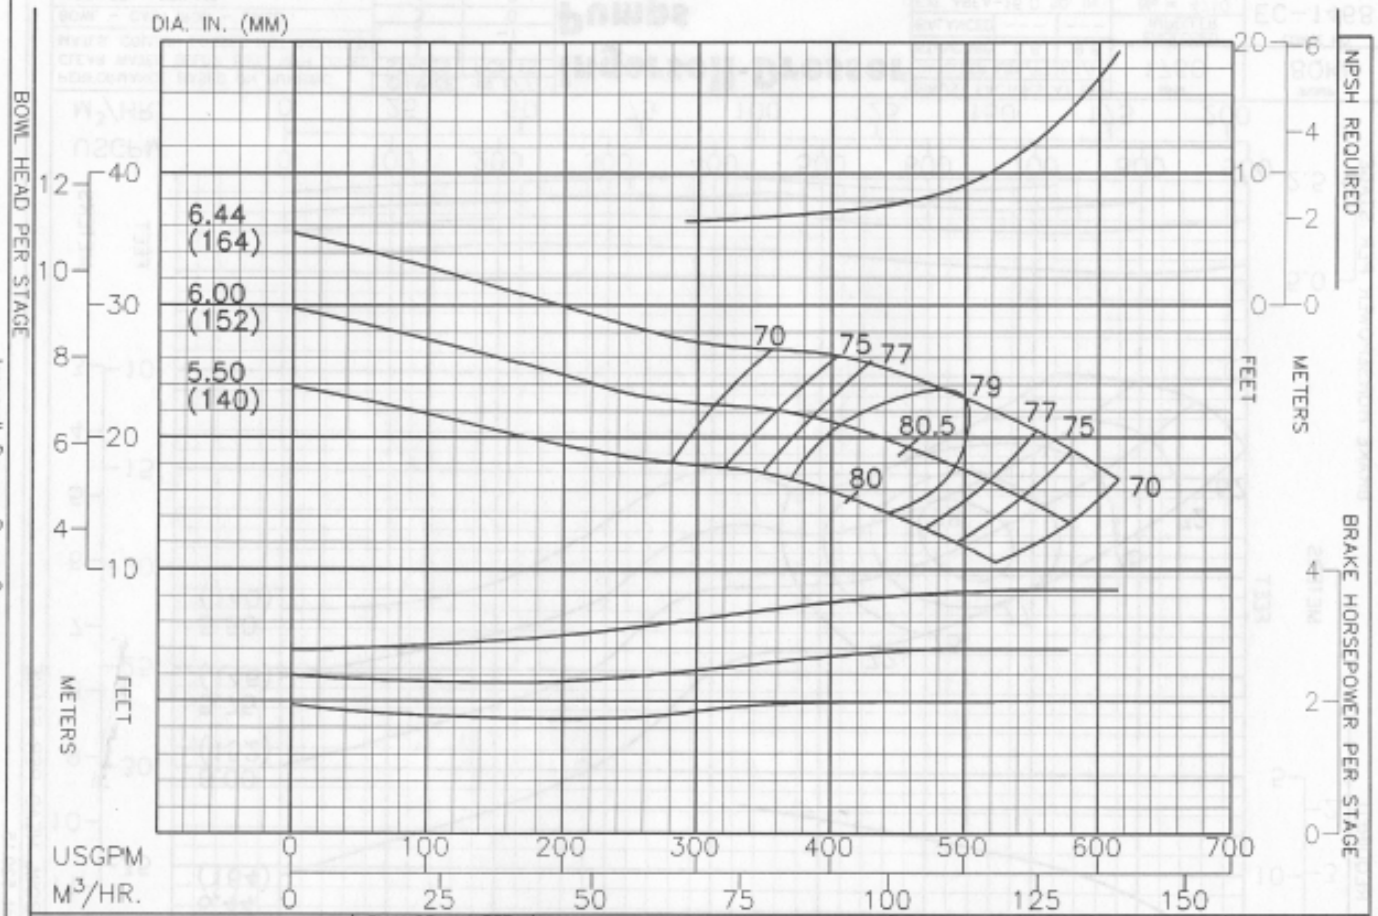

PERFORMANCE BASED ON PUMPING CLEAR WATER BELOW 85°F. WITH LISTED MATLS. COLUMN LOSSES NOT INCLUDED.	CHANGE STAGES	IN EFF. POINTS
BOWL – CAST IRON – LINED	1	+3
IMPELLER – BRONZE	2	+2
	3	+1
	4	0

Ingersoll-Dresser Pumps

THRUST FACTORS AT BEP		
IMPELLER	LBS/FT	KG/M
STANDARD	5.0	7.5
BALANCED	3.1	4.6
EYE AREA–11.3 SQ. IN.		

RPM	PUMP
1760	8NKH
ENCLOSED IMPELLER	CURVE NO.
N_s = 3750	EC–1371

Ingersoll-Dresser Pumps

VTP VERTICAL PUMPS

Sheet 520.15
December 1, 1993
New Sheet

Ingersoll-Dresser Pump Company

PERFORMANCE