


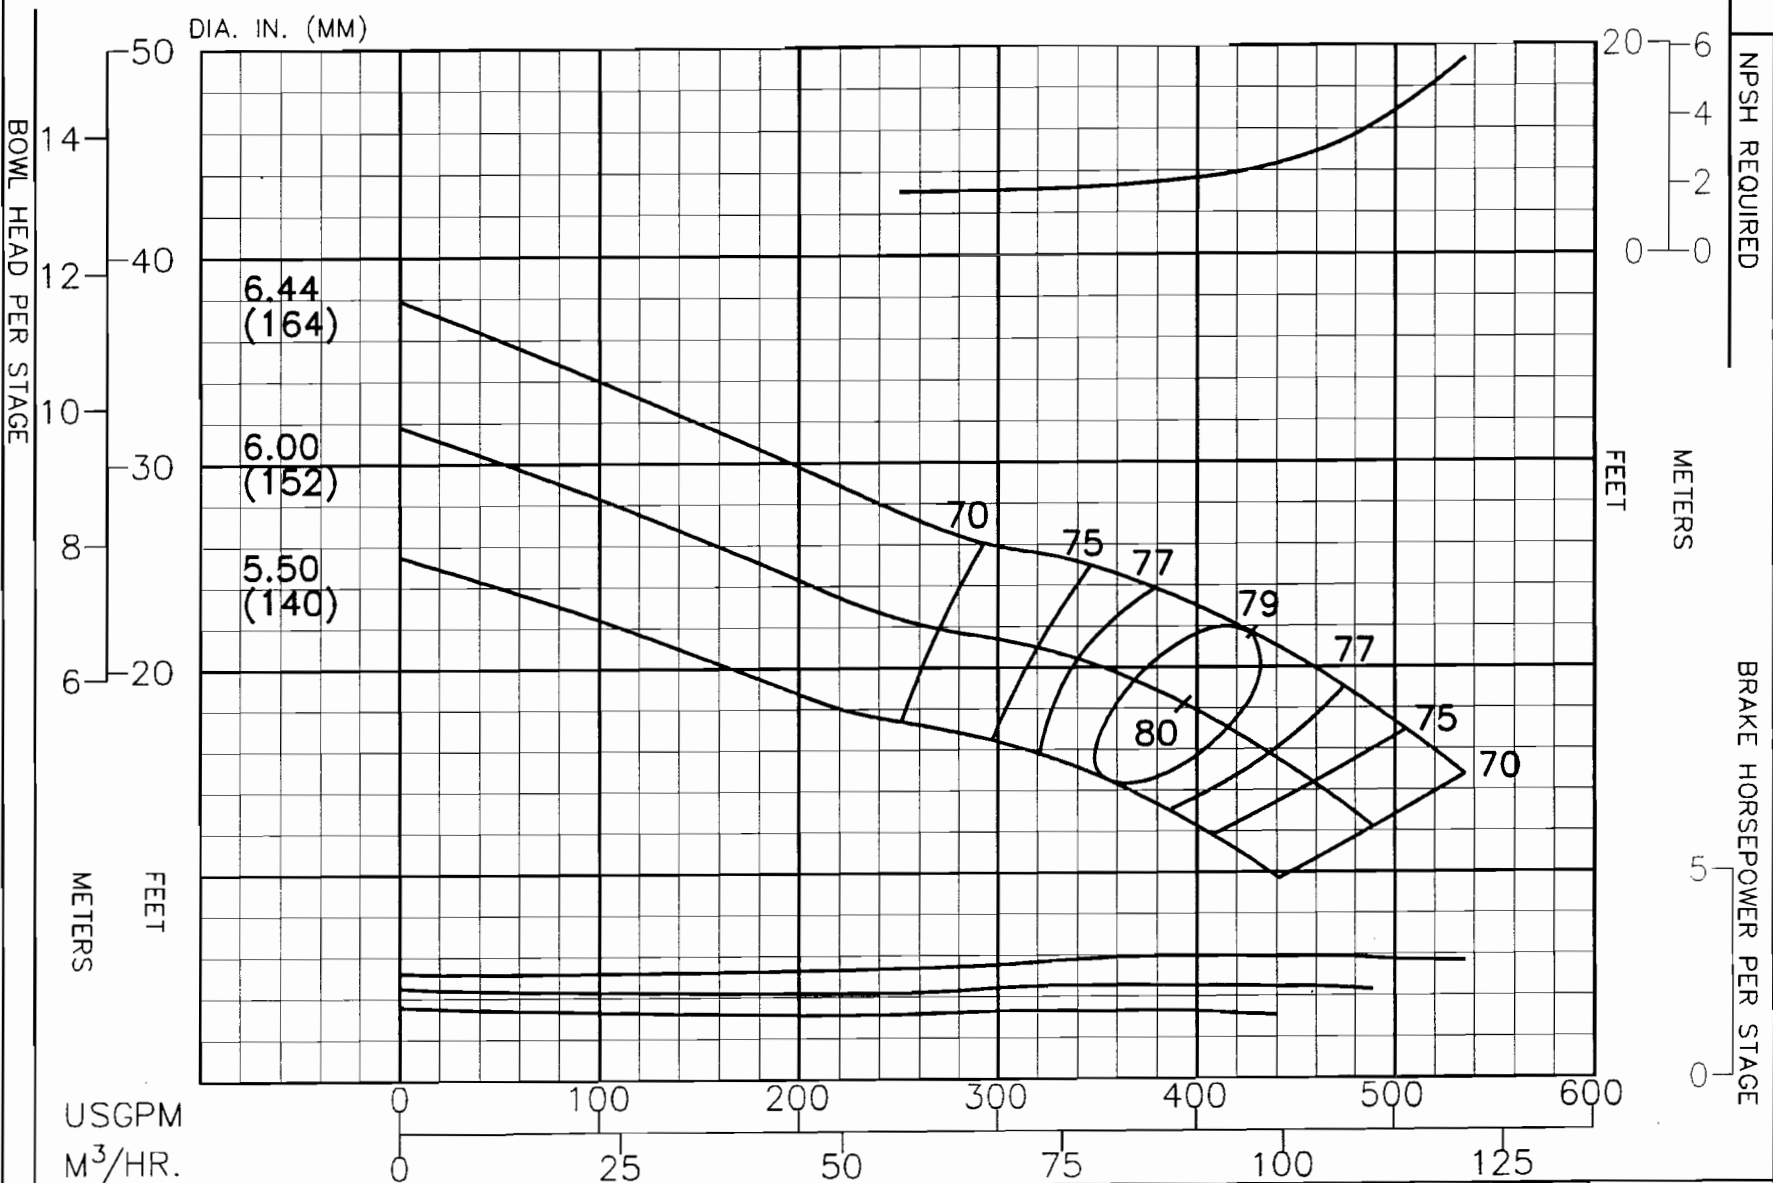

PERFORMANCE BASED ON PUMPING  
CLEAR WATER BELOW 85°F. WITH LISTED  
MATLS. COLUMN LOSSES NOT INCLUDED.  
BOWL - CAST IRON - LINED  
IMPELLER - BRONZE

| CHANGE<br>STAGES | IN EFF.<br>POINTS |
|------------------|-------------------|
| 1                | -3                |
| 2                | -2                |
| 3                | -1                |
| 4                | 0                 |

**Ingersoll-Dresser**  
**Pumps**

| THRUST FACTORS AT BEP |        |      |
|-----------------------|--------|------|
| IMPELLER              | LBS/FT | KG/M |
| STANDARD              | 5.20   | 7.80 |
| BALANCED              | 3.10   | 4.60 |
| EYE AREA-11.3 SQ. IN. |        |      |

| RPM                   |
|-----------------------|
| 1760                  |
| ENCLOSED<br>IMPELLER  |
| N <sub>s</sub> = 3620 |

| PUMP      |
|-----------|
| 8NKL      |
| CURVE NO. |
| EC-1384   |