


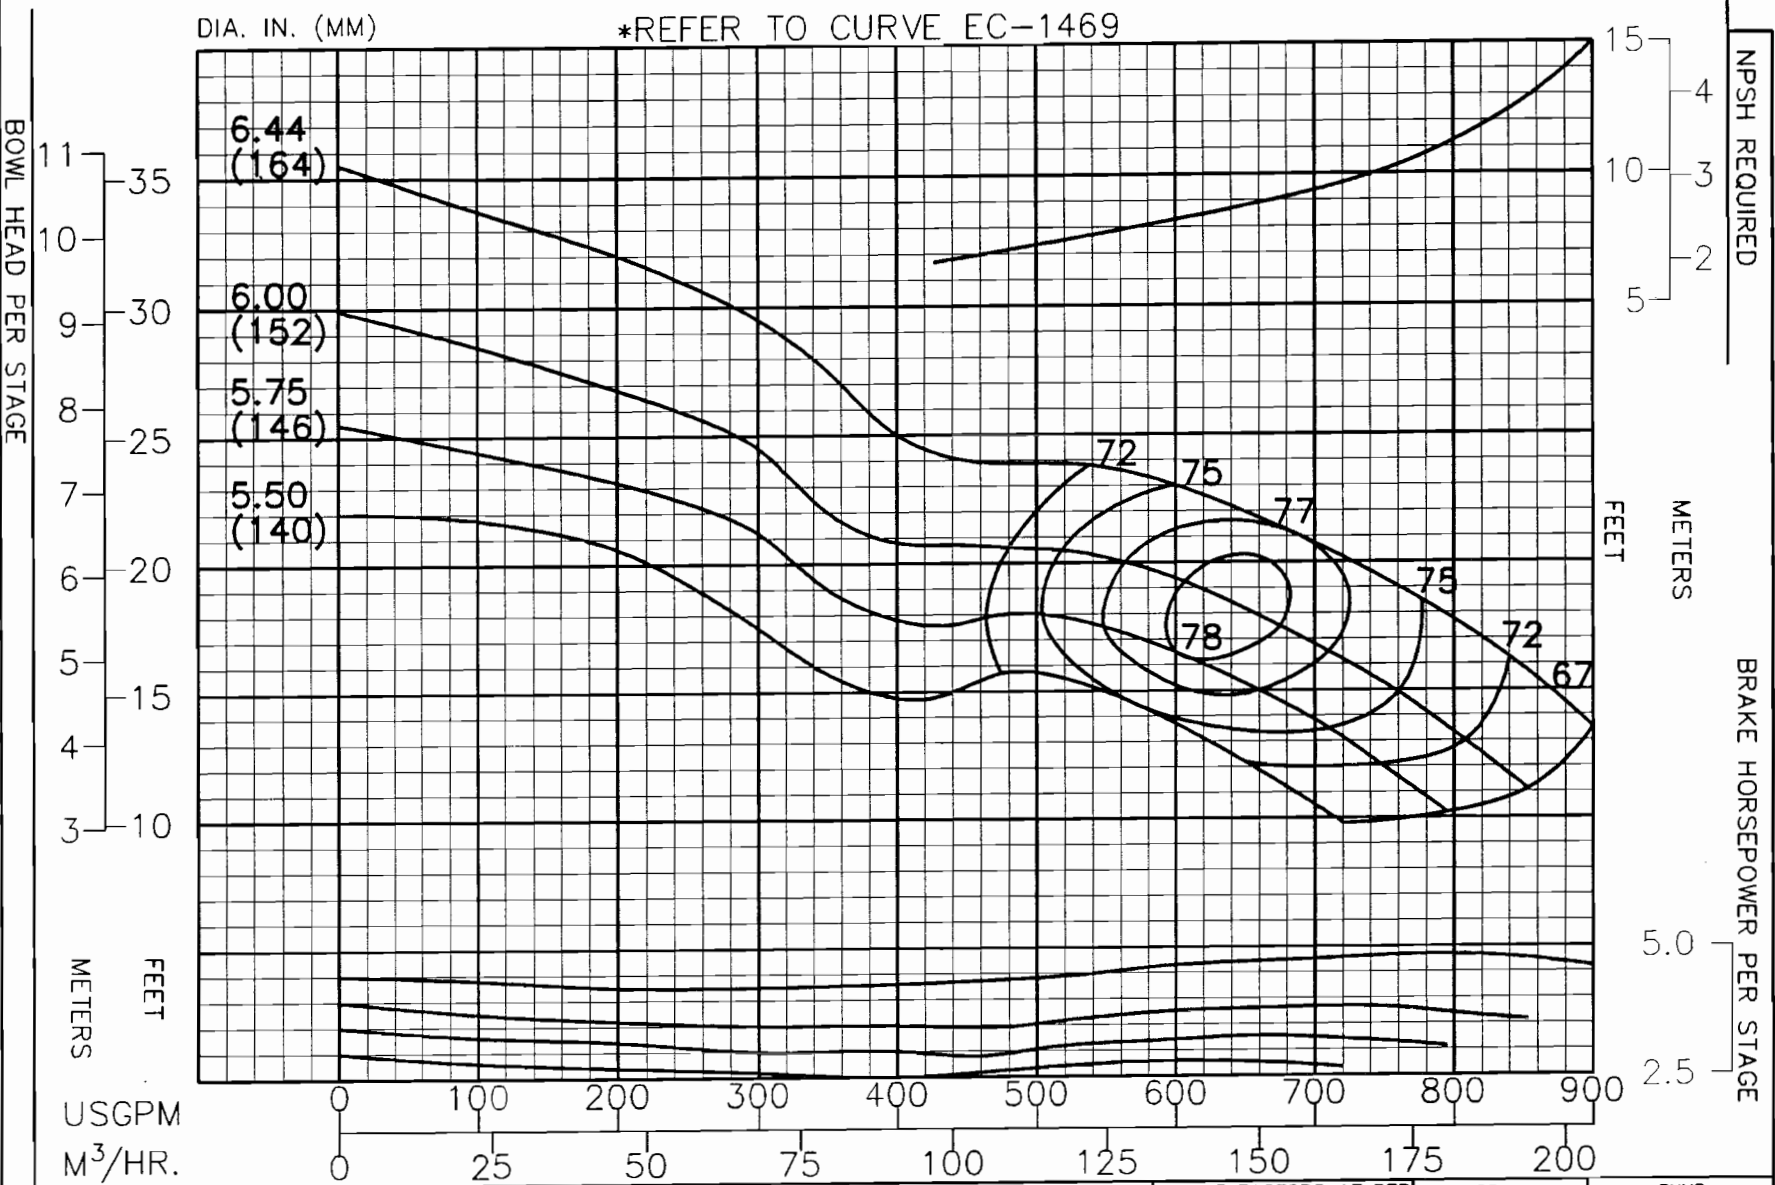

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED

IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	0
2	-1
3	0
4	0

Ingersoll-Dresser **Pumps**

THRUST FACTORS AT BEP		
IMPELLER	LBS/FT	KG/M
STANDARD	6.6	9.8
BALANCED	---	---
EYE AREA-16.0 SQ. IN.		

RPM	1760
ENCLOSED IMPELLER	
N _s =	4710

PUMP	8QKH
CURVE NO.	EC-1468