


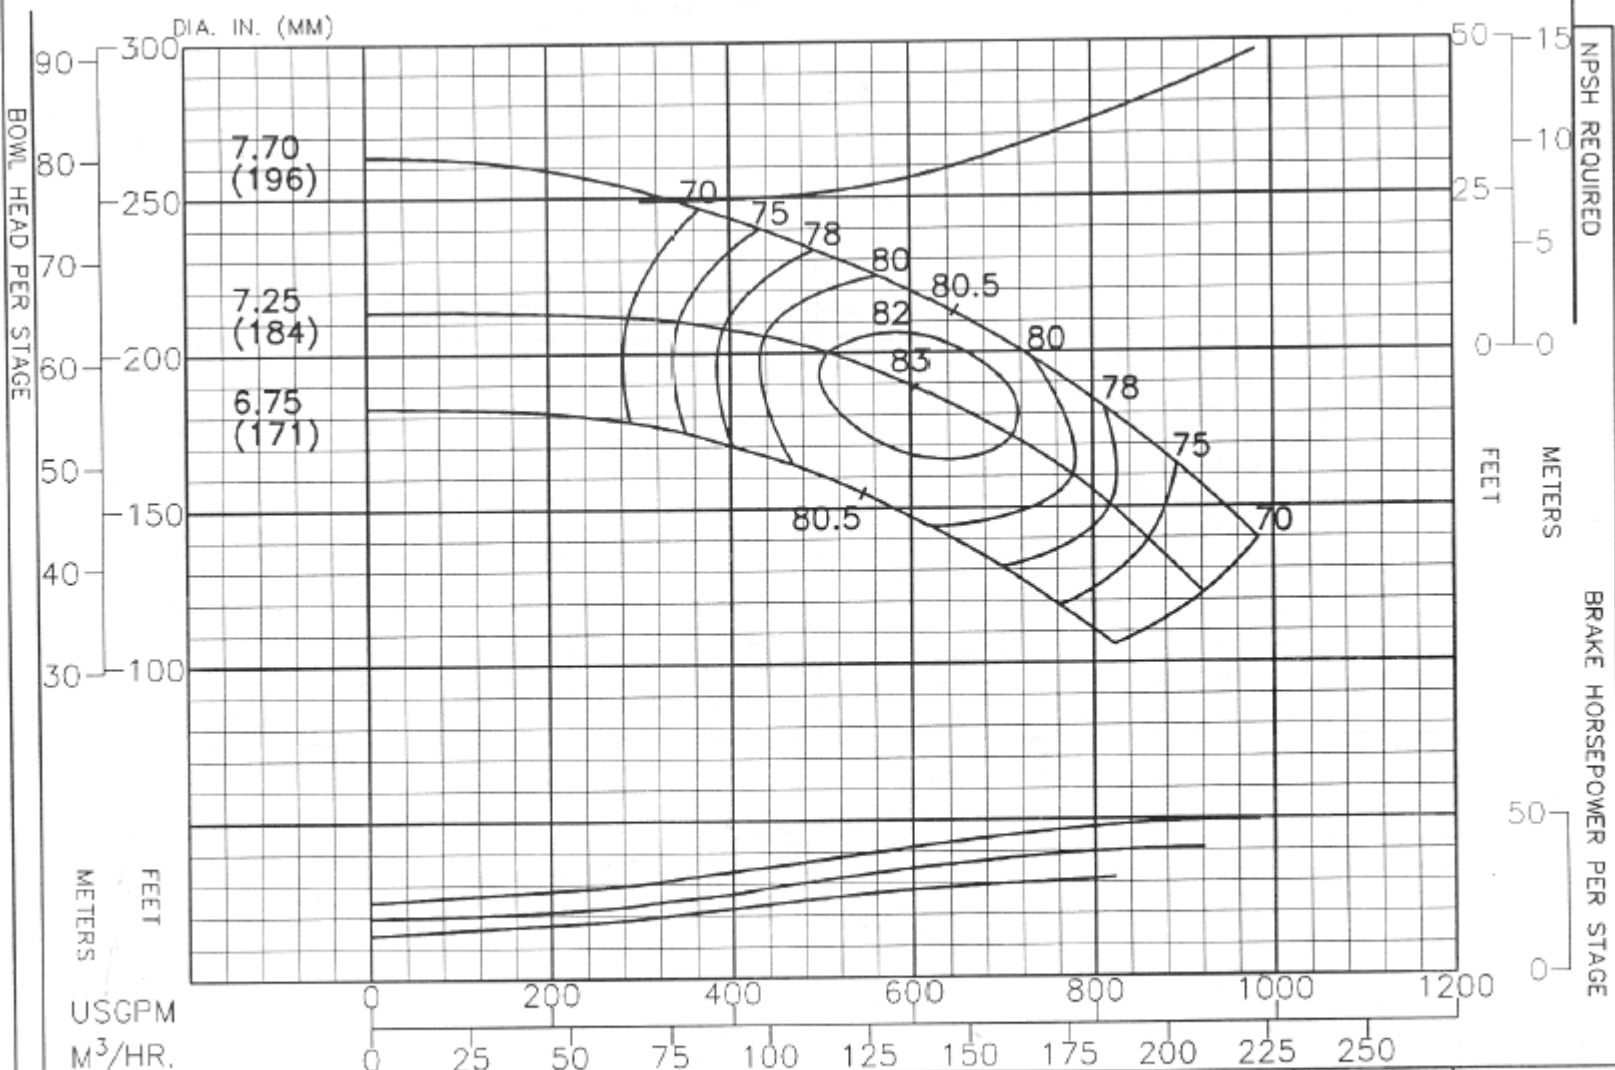

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED

IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-3.5
2	-2
3	-5

**Ingersoll-Dresser
Pumps**

THRUST FACTORS AT BEP		
IMPELLER	LBS/FT	KG/M
STANDARD	2.25	3.35
BALANCED	---	---
EYE AREA	7.85	SQ. IN.

RPM
3550
ENCLOSED IMPELLER
N _s = 1620

PUMP
10L30
CURVE NO.
EC-2357