


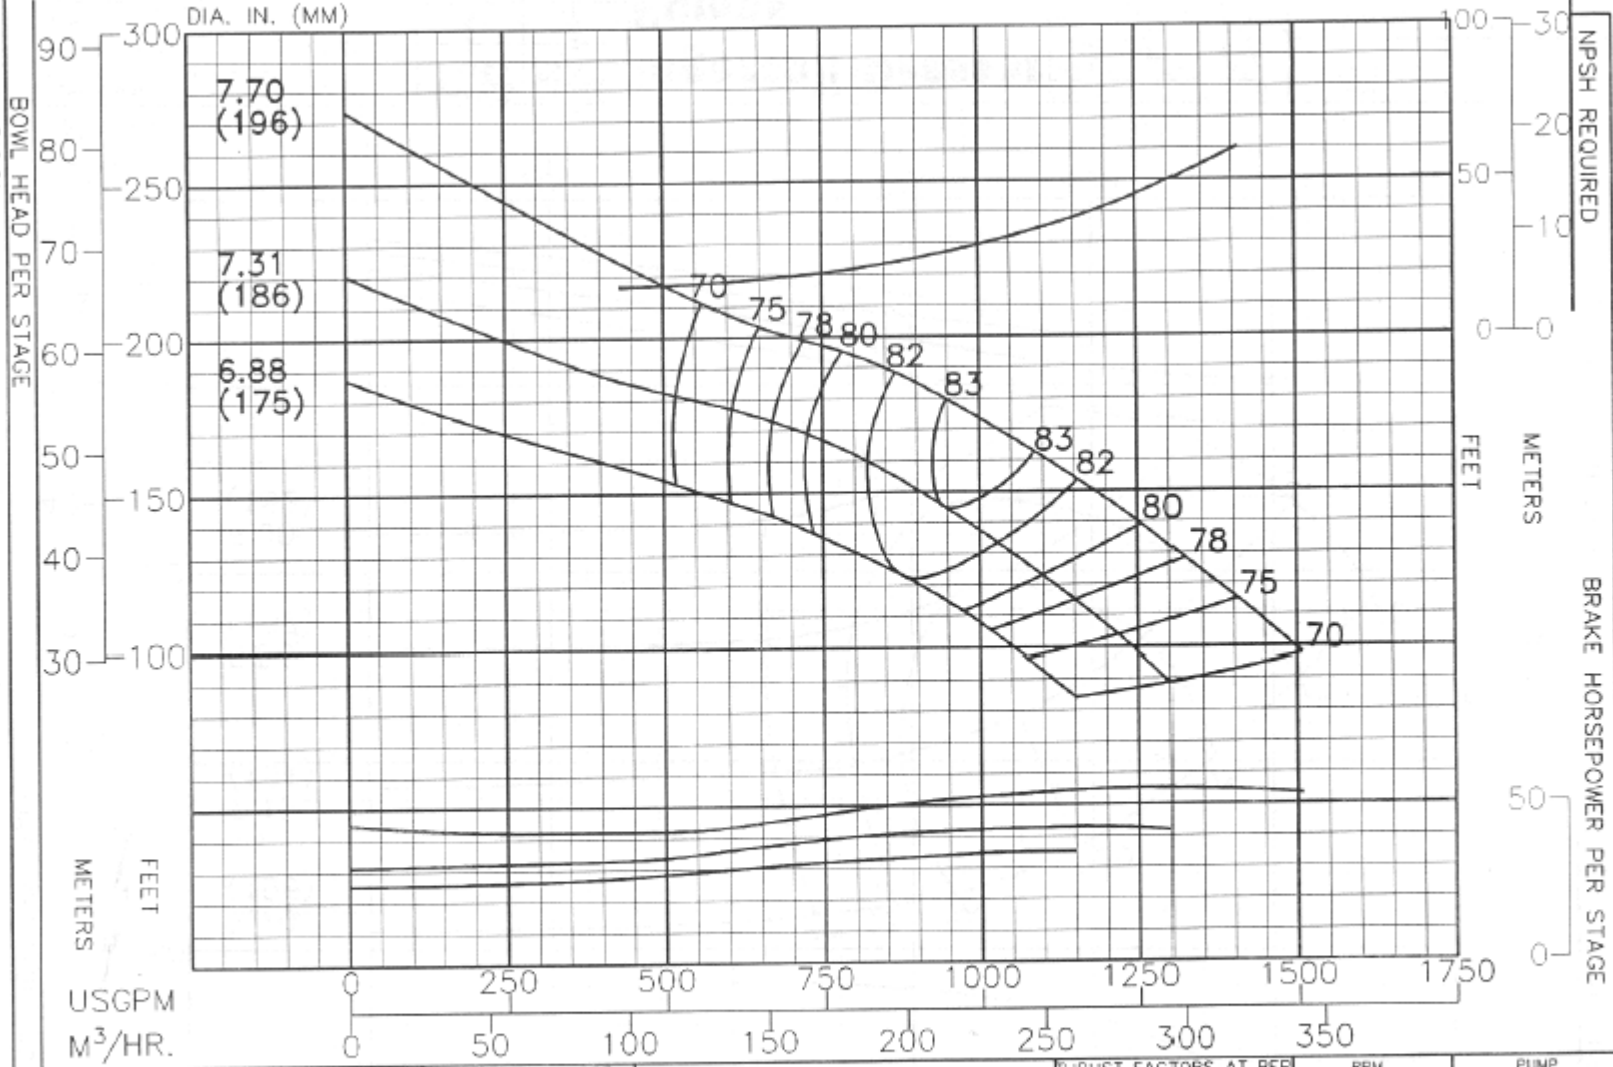

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-2
2	-1.5
3	-1

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	4.31 6.42
BALANCED	--- ---
EYE AREA- 11.2 SQ. IN.	

RPM
3550
ENCLOSED IMPELLER
N _s = 2390

PUMP
10M41
CURVE NO.
EC-2367