


DIA. IN. (MM)

BOWL HEAD PER STAGE

NPSH REQUIRED

BRAKE HORSEPOWER PER STAGE

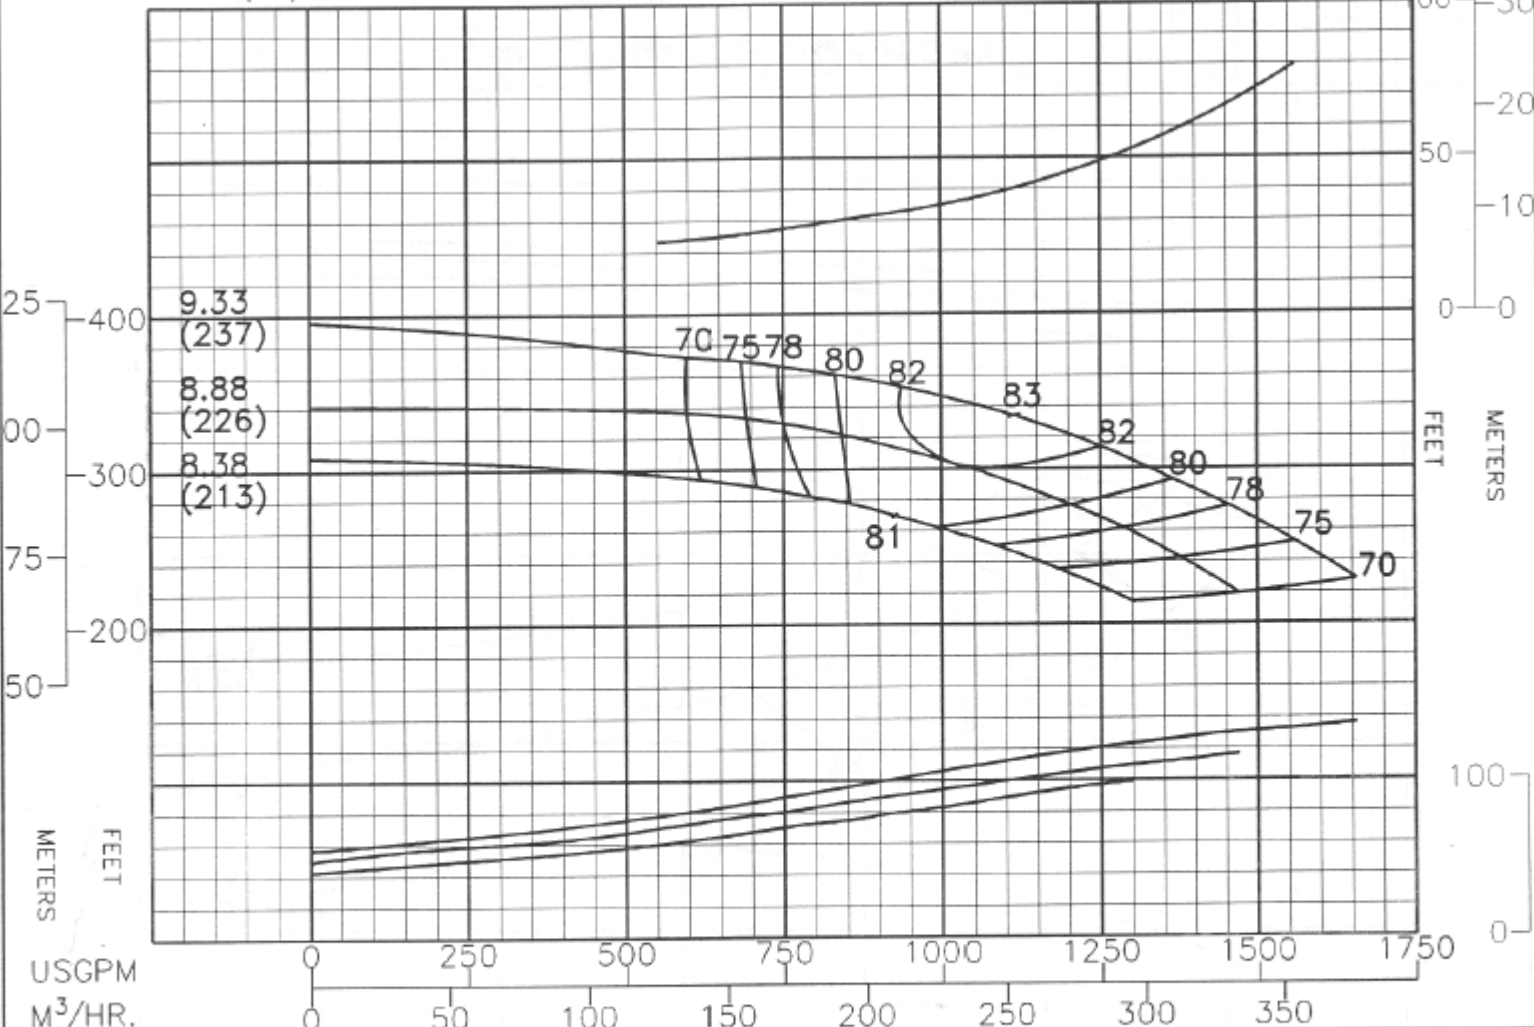

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED

BOWL - CAST IRON - LINED

IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-1
2	-5
3	0

Ingersoll-Dresser Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	3.10 4.62
BALANCED	--- ---
EYE AREA-	11.95 SQ. IN.

RPM
3550
ENCLOSED IMPELLER
N _s = 1520

PUMP
12L54
CURVE NO.
EC-2361