


NPSH REQUIRED

BRAKE HORSEPOWER PER STAGE

FEET
METERS

FEET
METERS

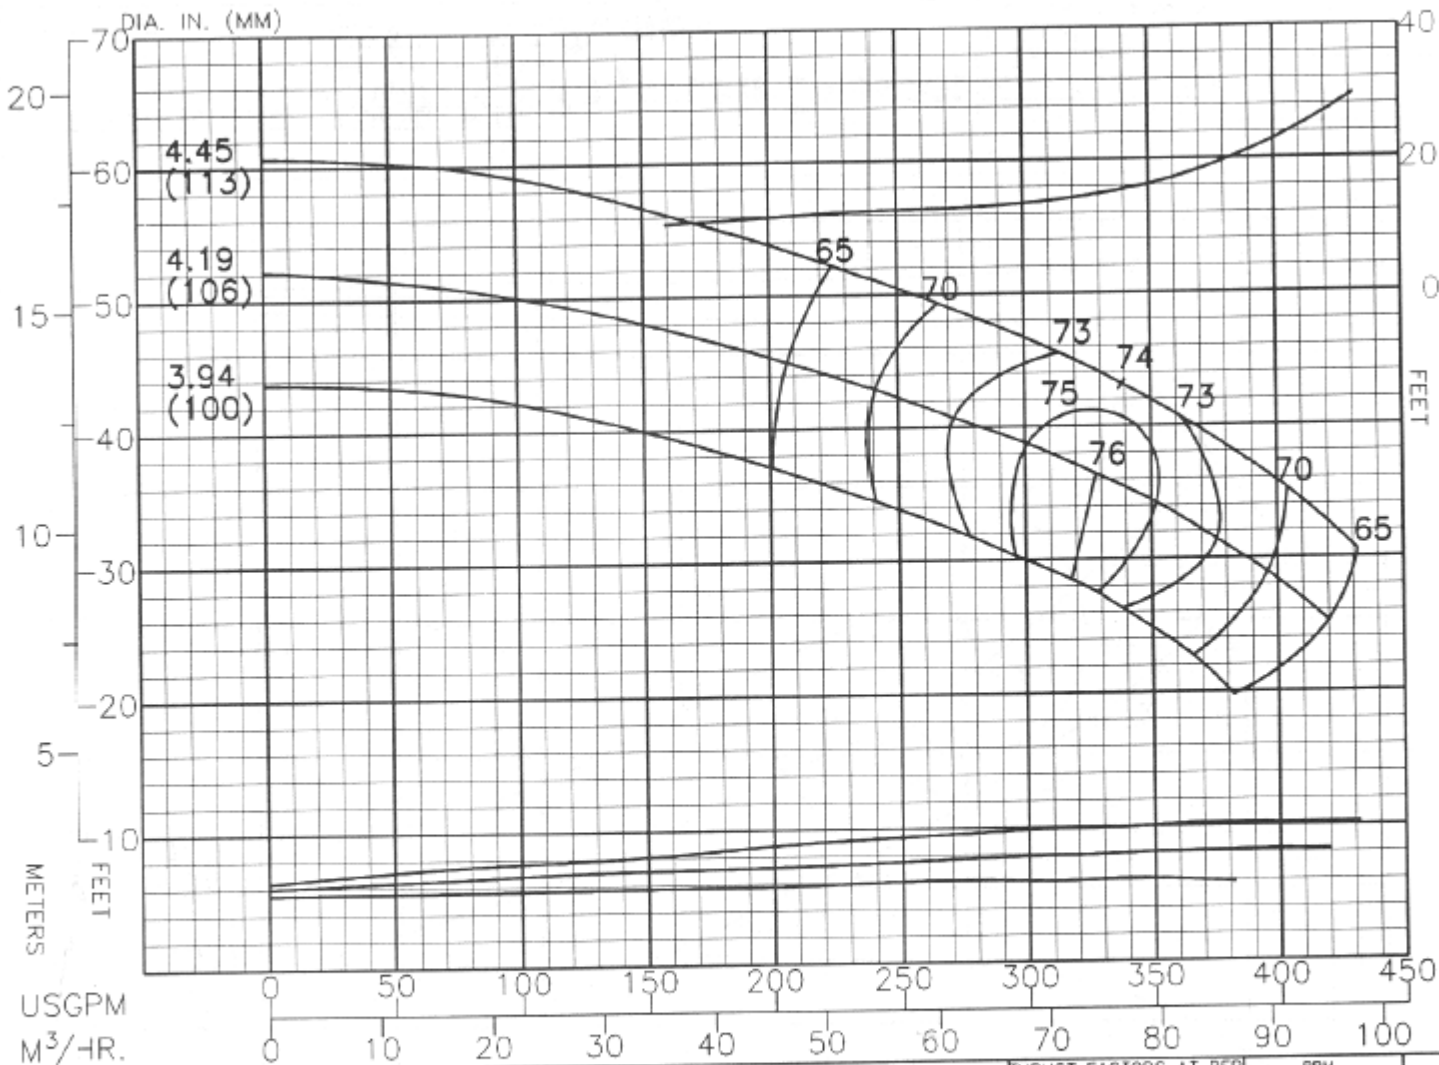

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-2.5
2	-1
3	-.5

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	2.31 3.44
BALANCED	--- ---
EYE AREA- 6.28 SQ. IN.	

RPM
3500
ENCLOSED IMPELLER
N _s = 3840

PUMP
6H18
CURVE NO.
EC-2381