


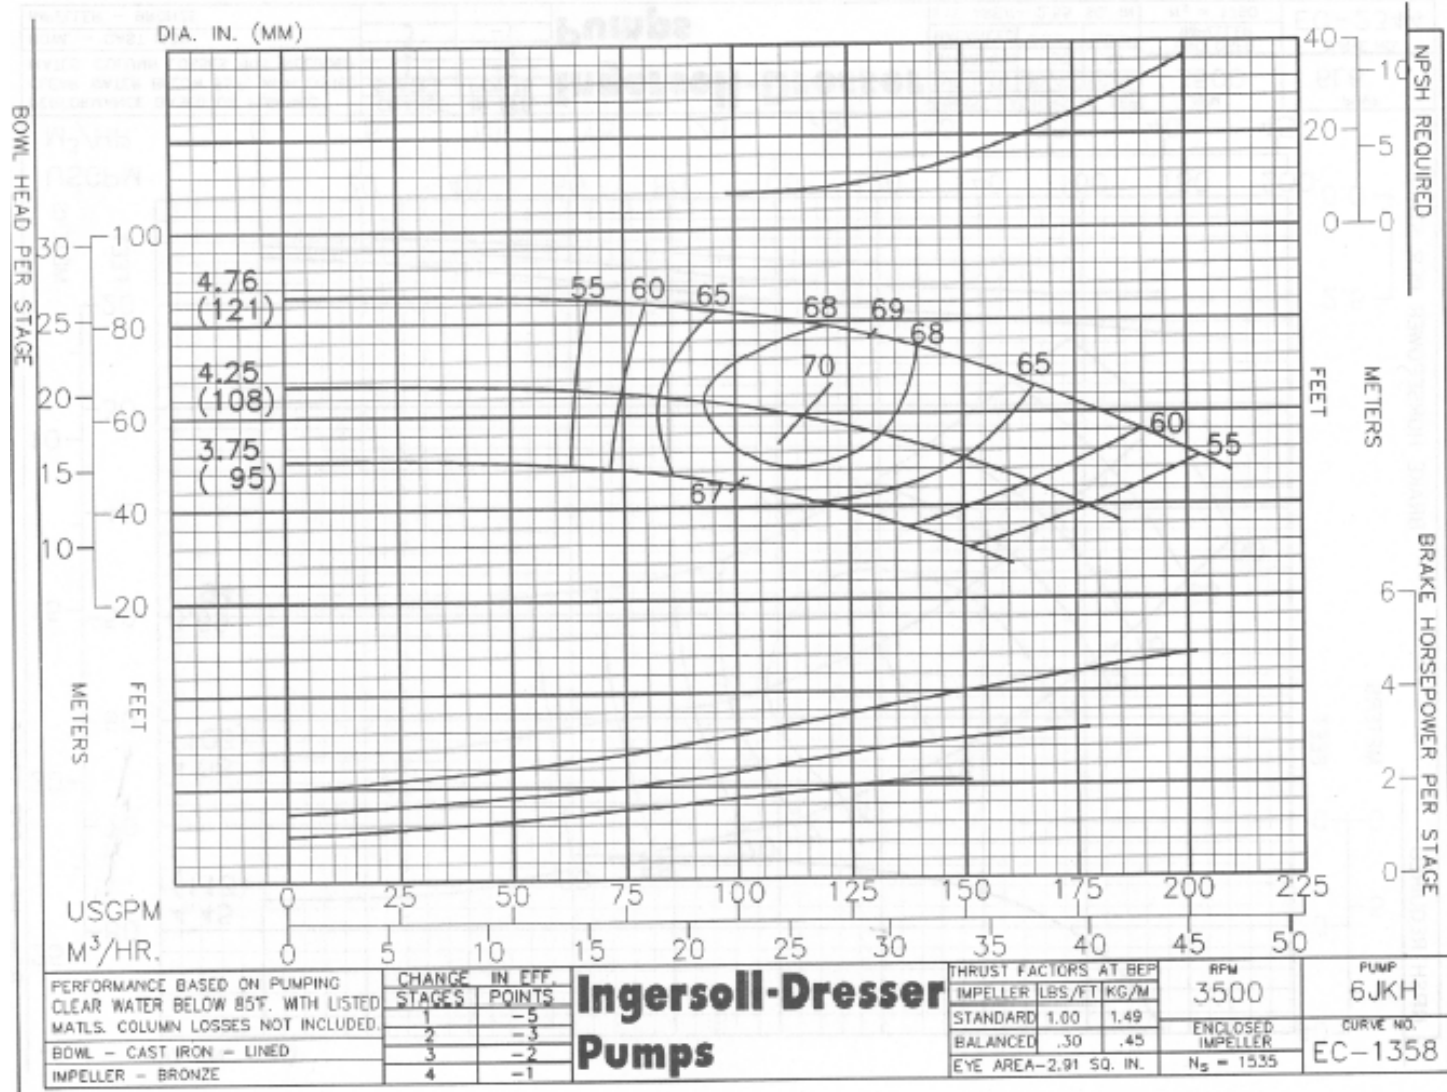

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED

BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-5
2	-3
3	-2
4	-1

**Ingersoll-Dresser
Pumps**

THRUST FACTORS AT BEP		RPM	PUMP
IMPELLER	LBS/FT KG/M	3500	6JKH
STANDARD	1.00 1.49	ENCLOSED IMPELLER	CURVE NO. EC-1358
BALANCED	.30 .45		
EYE AREA-2.91 SQ. IN.		N _s = 1535	