


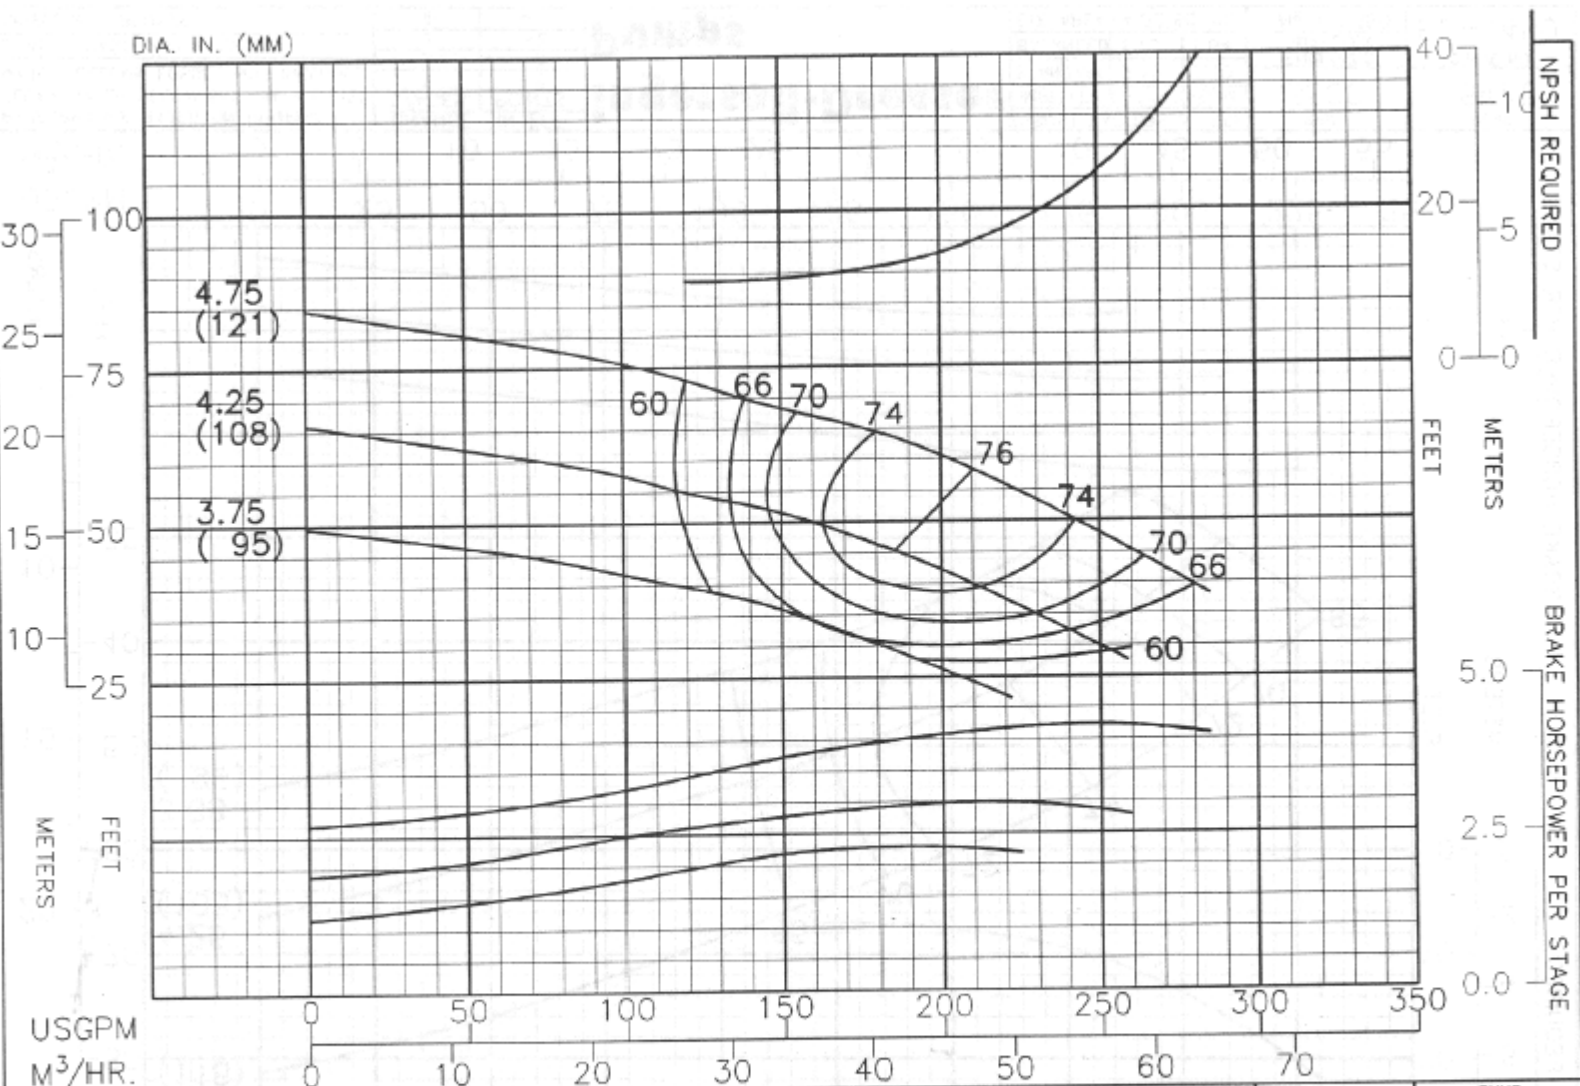

PERFORMANCE BASED ON PUMPING CLEAR WATER BELOW 85°F. WITH LISTED MATLS. COLUMN LOSSES NOT INCLUDED	CHANGE IN EFF.		Ingersoll-Dresser Pumps	THRUST FACTORS AT BEP		RPM 3500	PUMP 6KKH	
	STAGES	POINTS		IMPELLER LBS/FT KG/M				
	1	-5		STANDARD	1.50	2.24	ENCLOSED IMPELLER	CURVE NO. EC-1360
	2	-4		BALANCED	1.10	1.64		
	3	-3		EYE AREA-4.3 SQ. IN.				
BOWL - CAST IRON - LINED	5	-1						
IMPELLER - BRONZE						N _s = 2410		